DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 150mm Tandem Lift

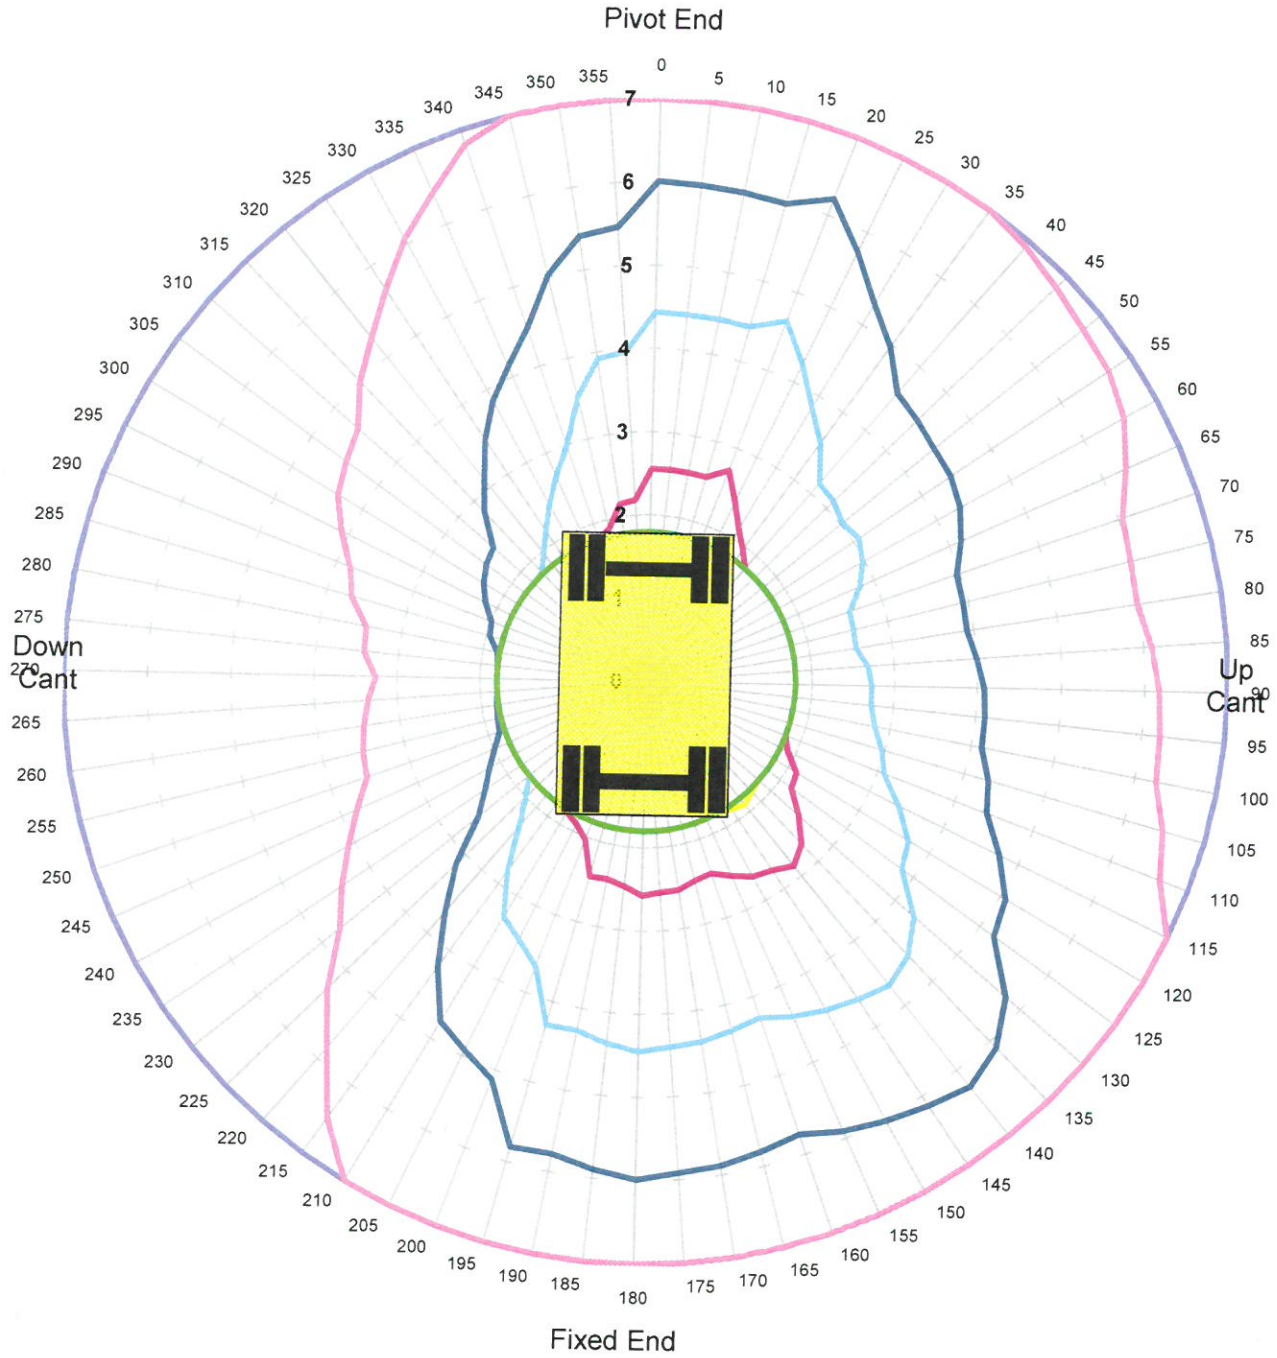

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant -150mm

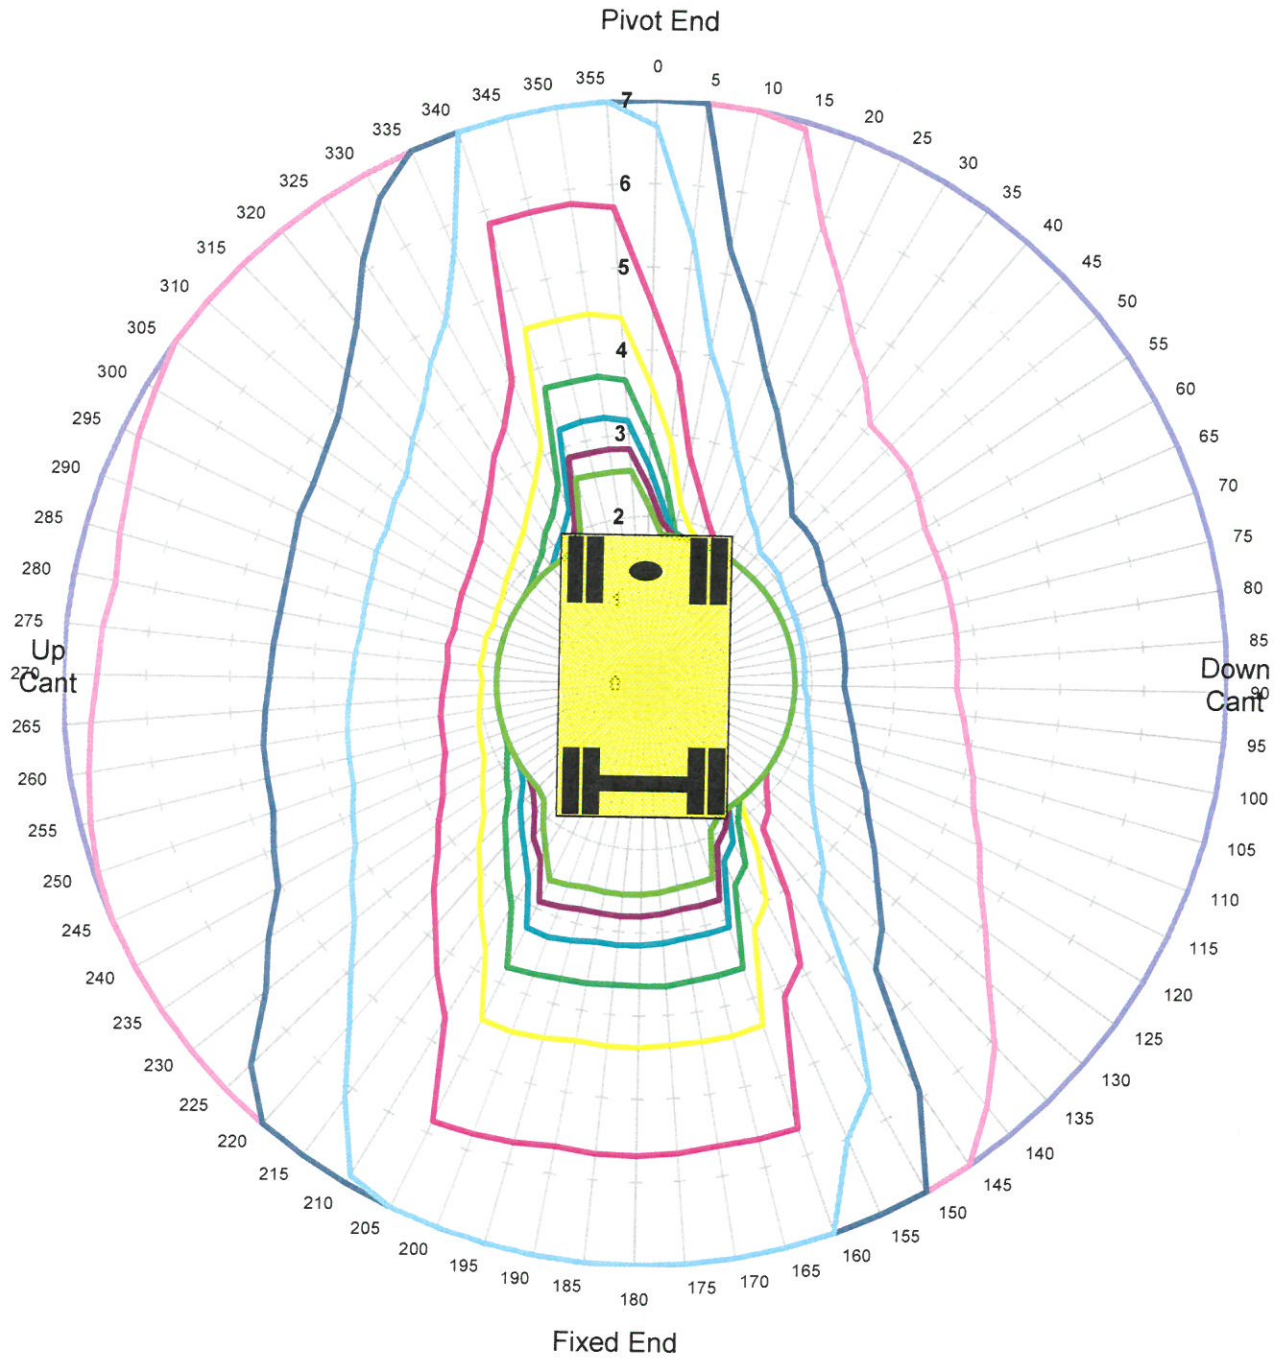

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant -50mm

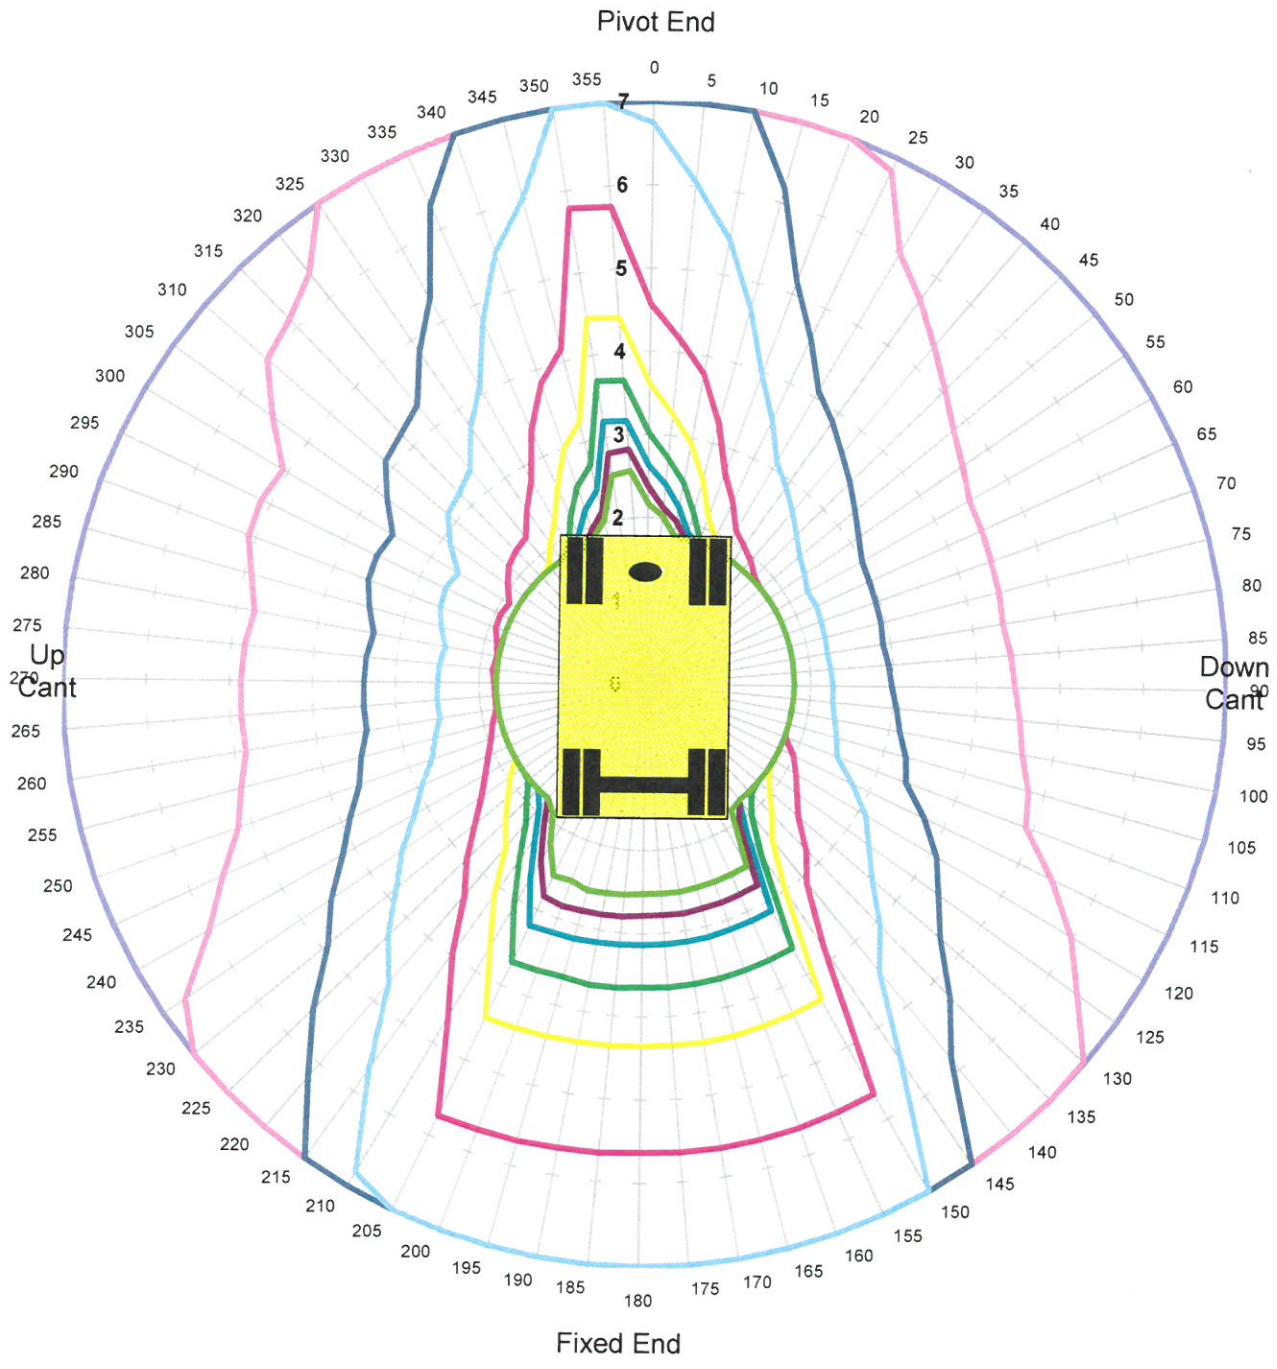

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 50mm

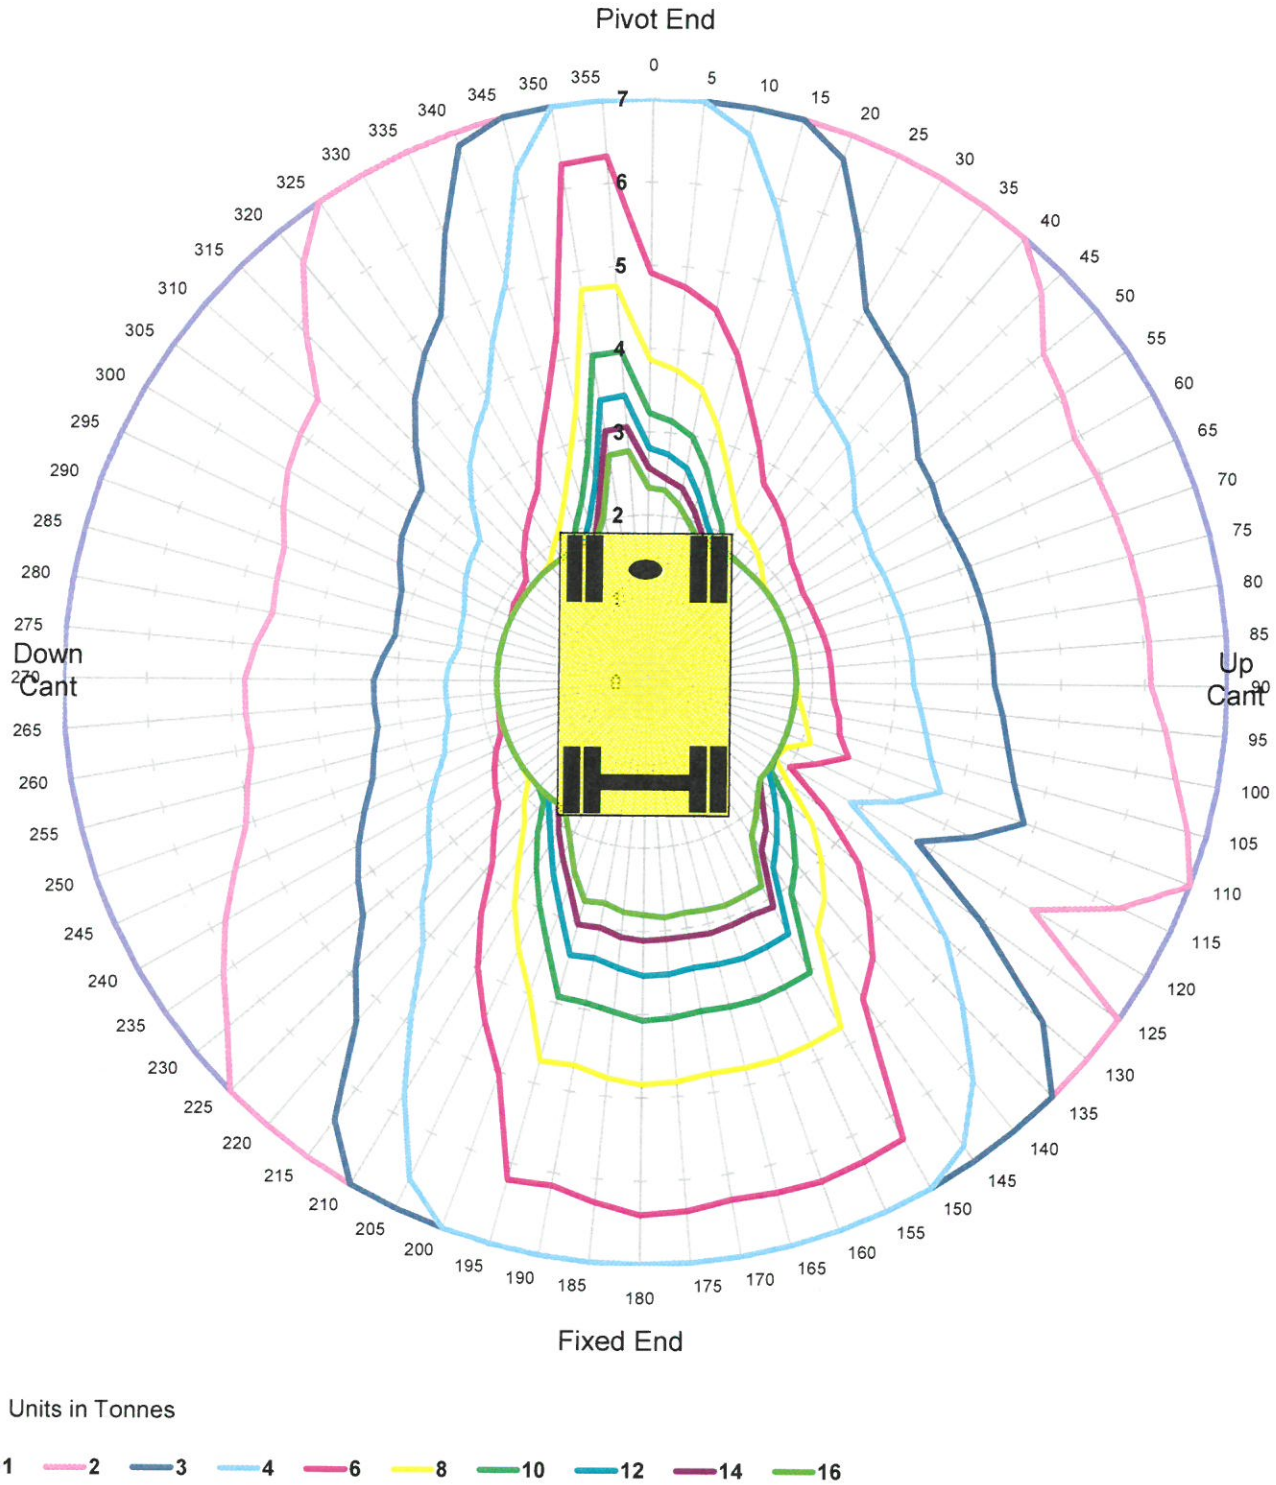

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 150mm

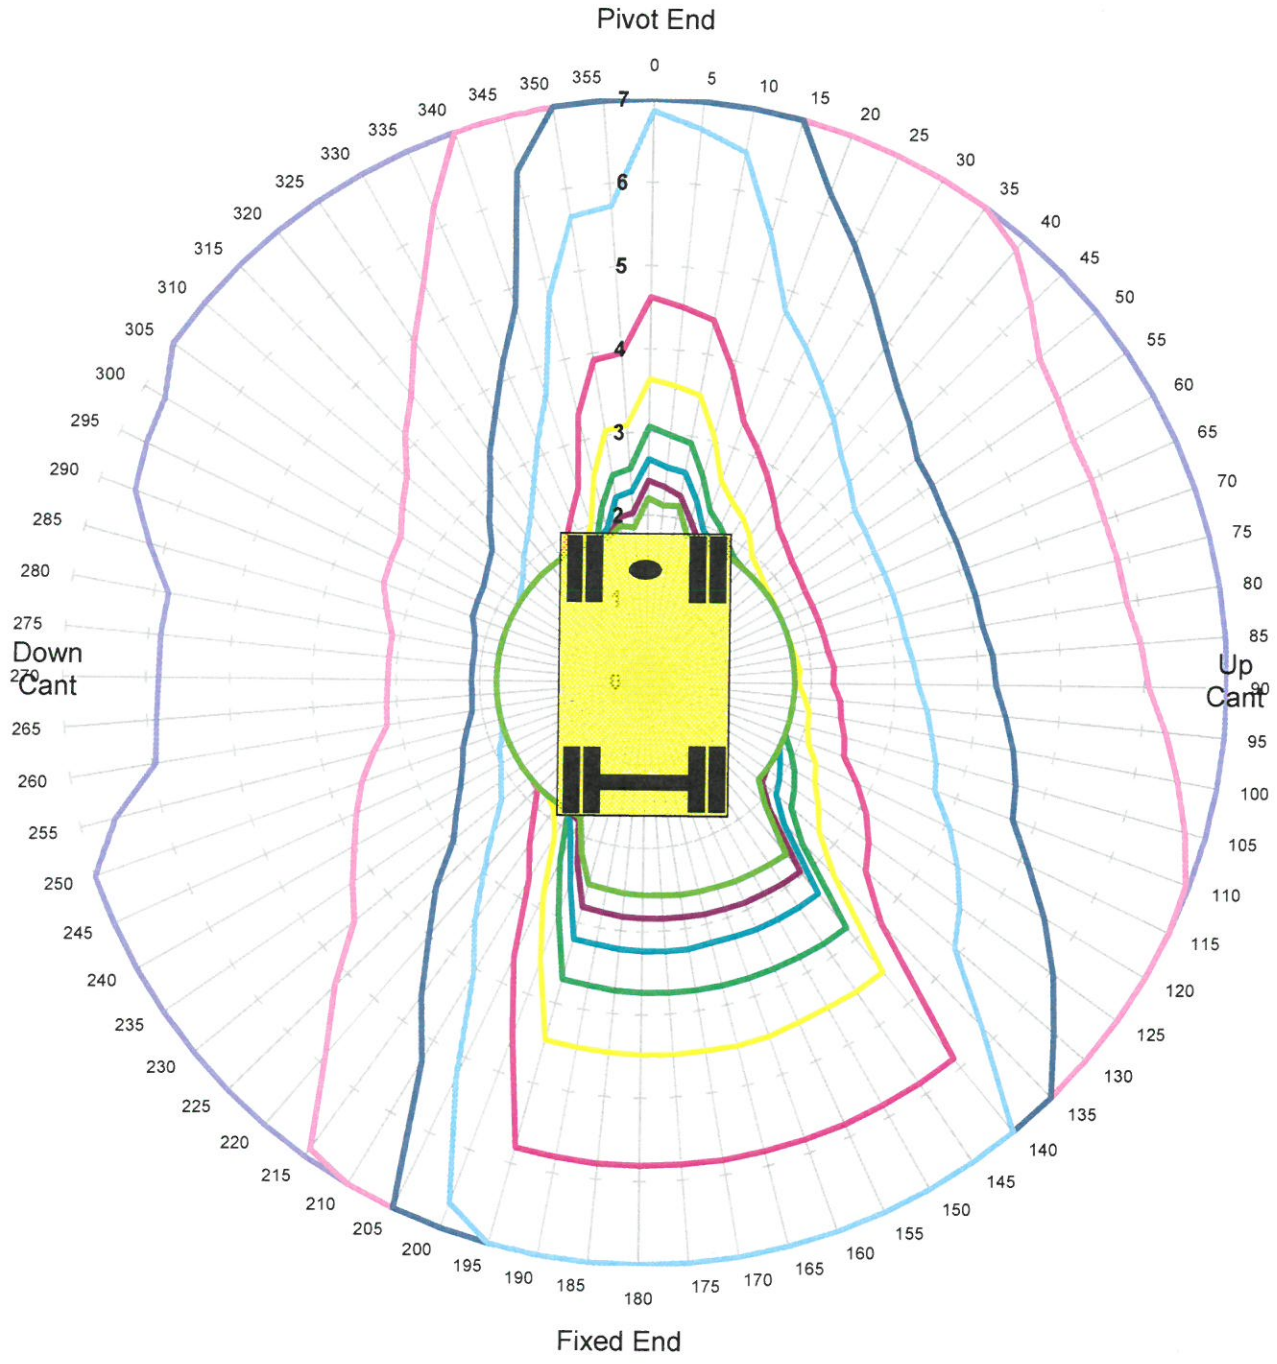

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant -150mm

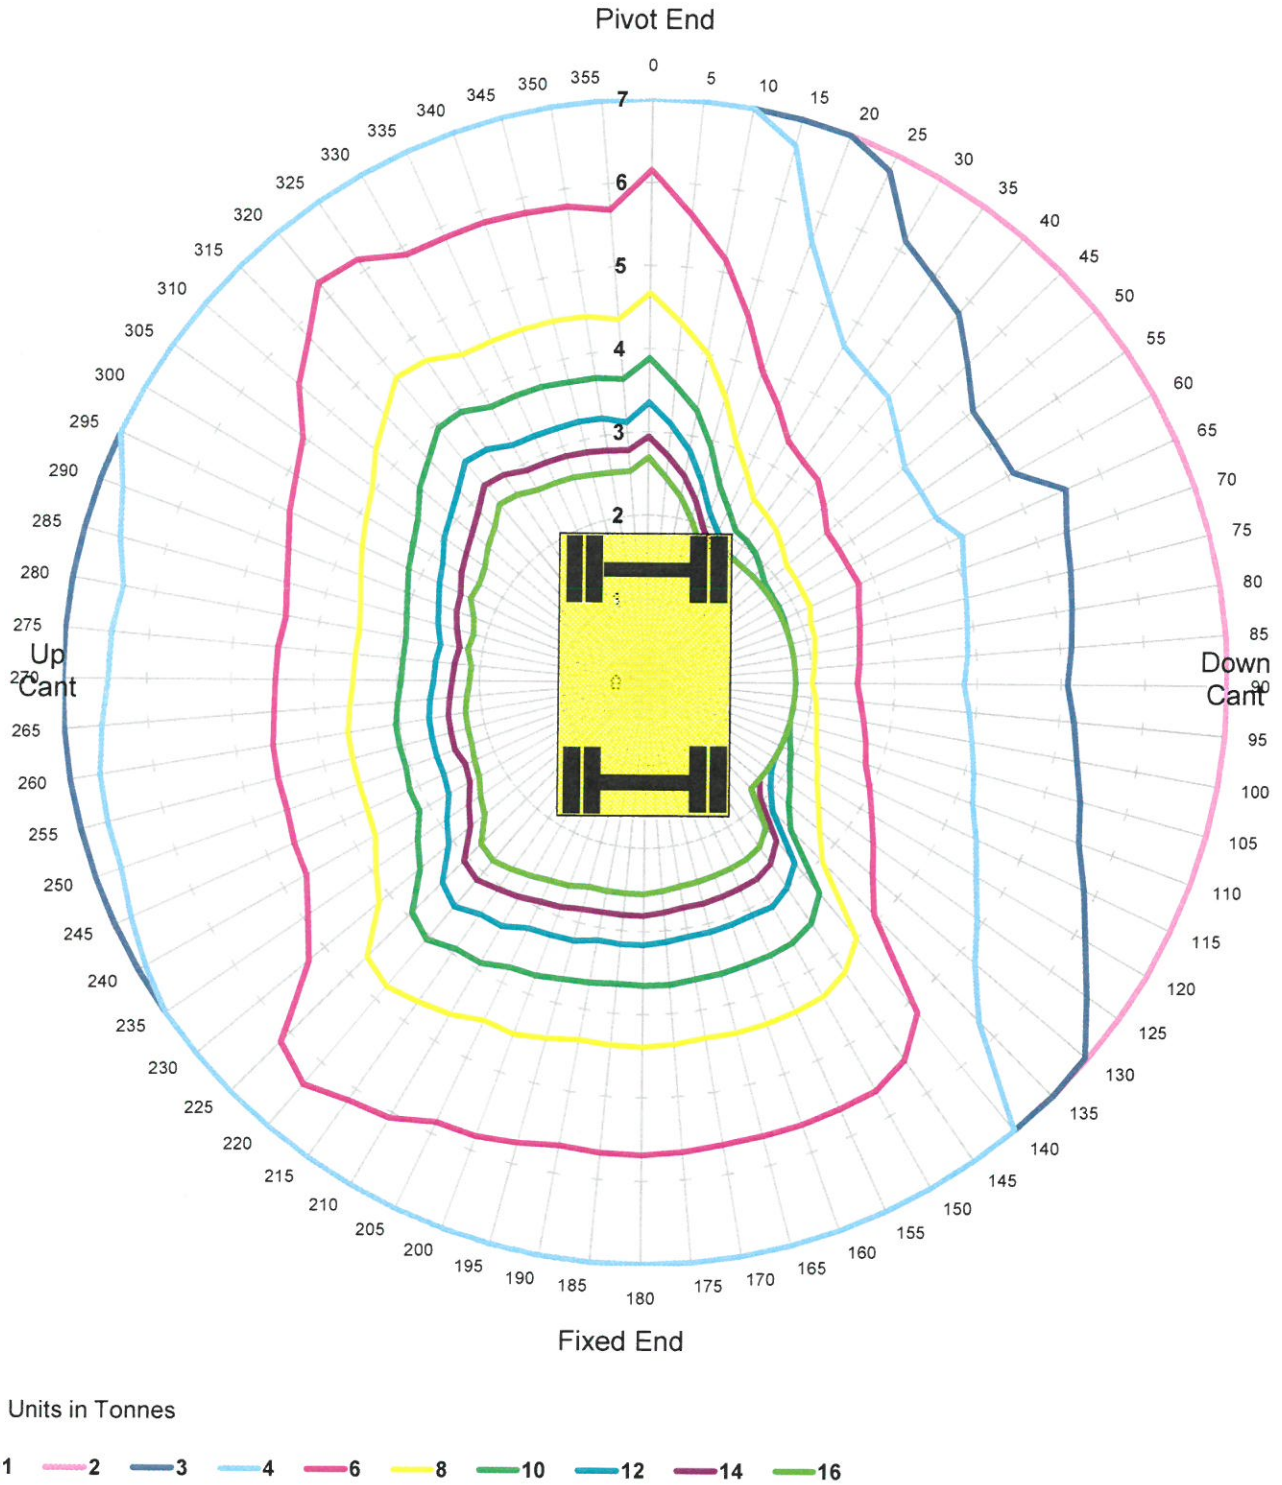

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant -50mm

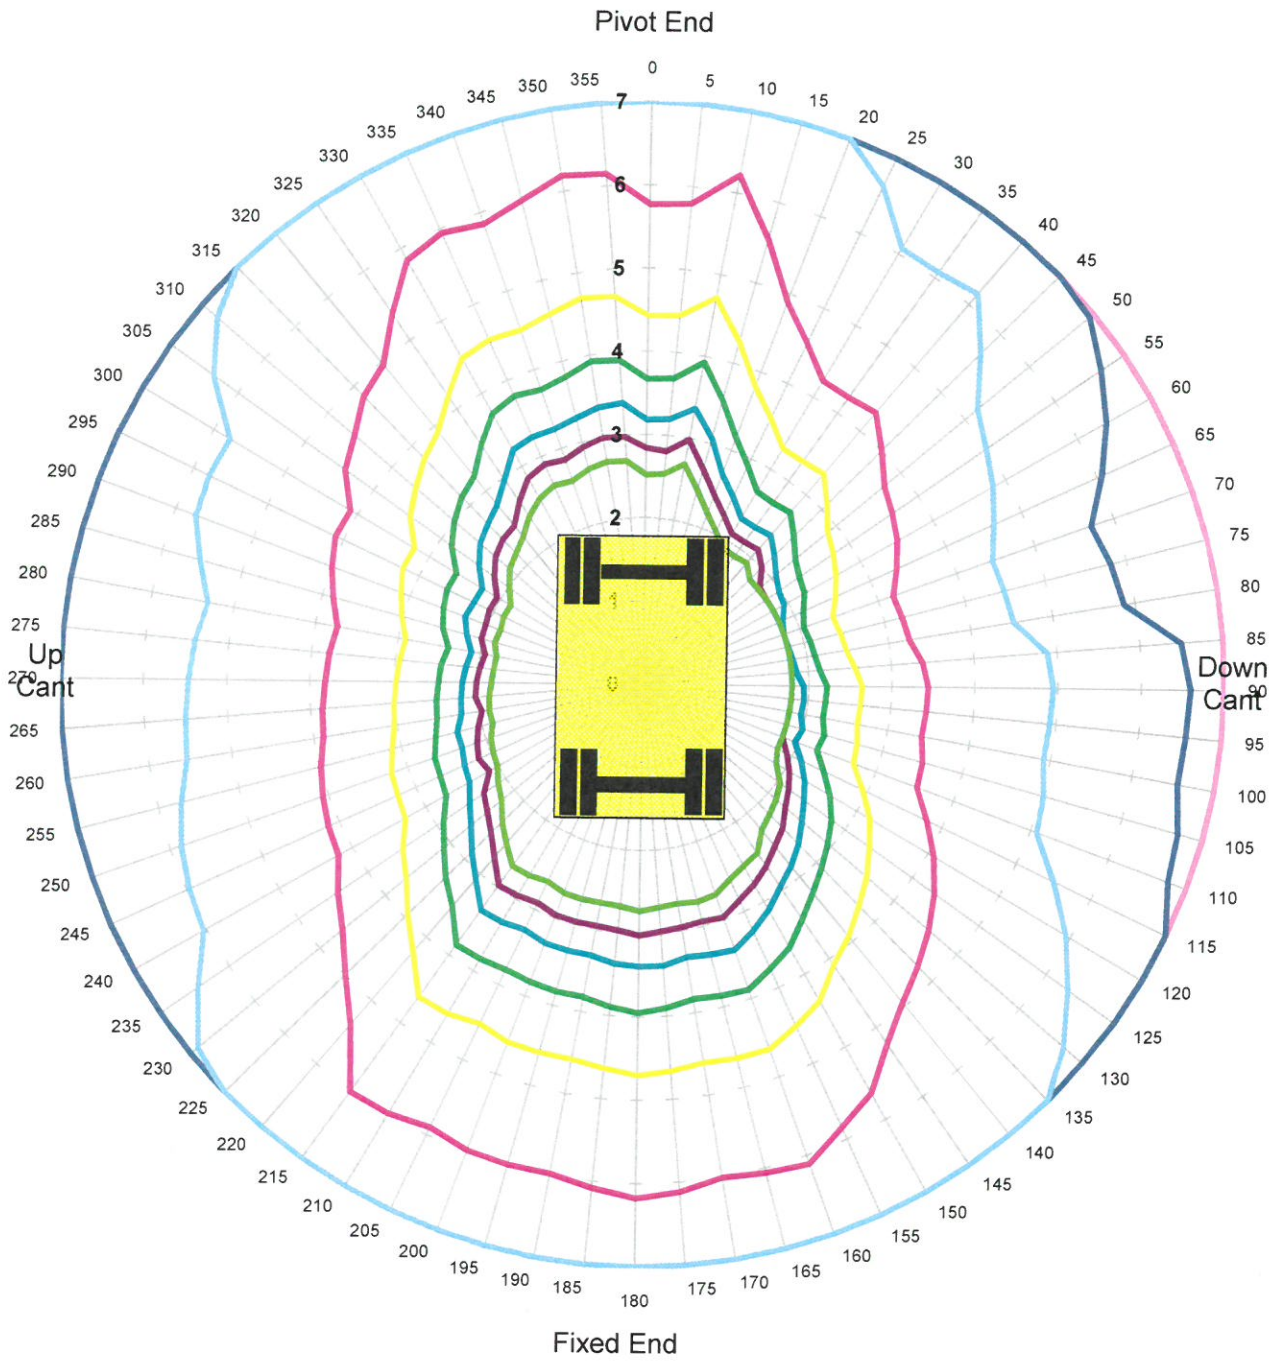

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 50mm

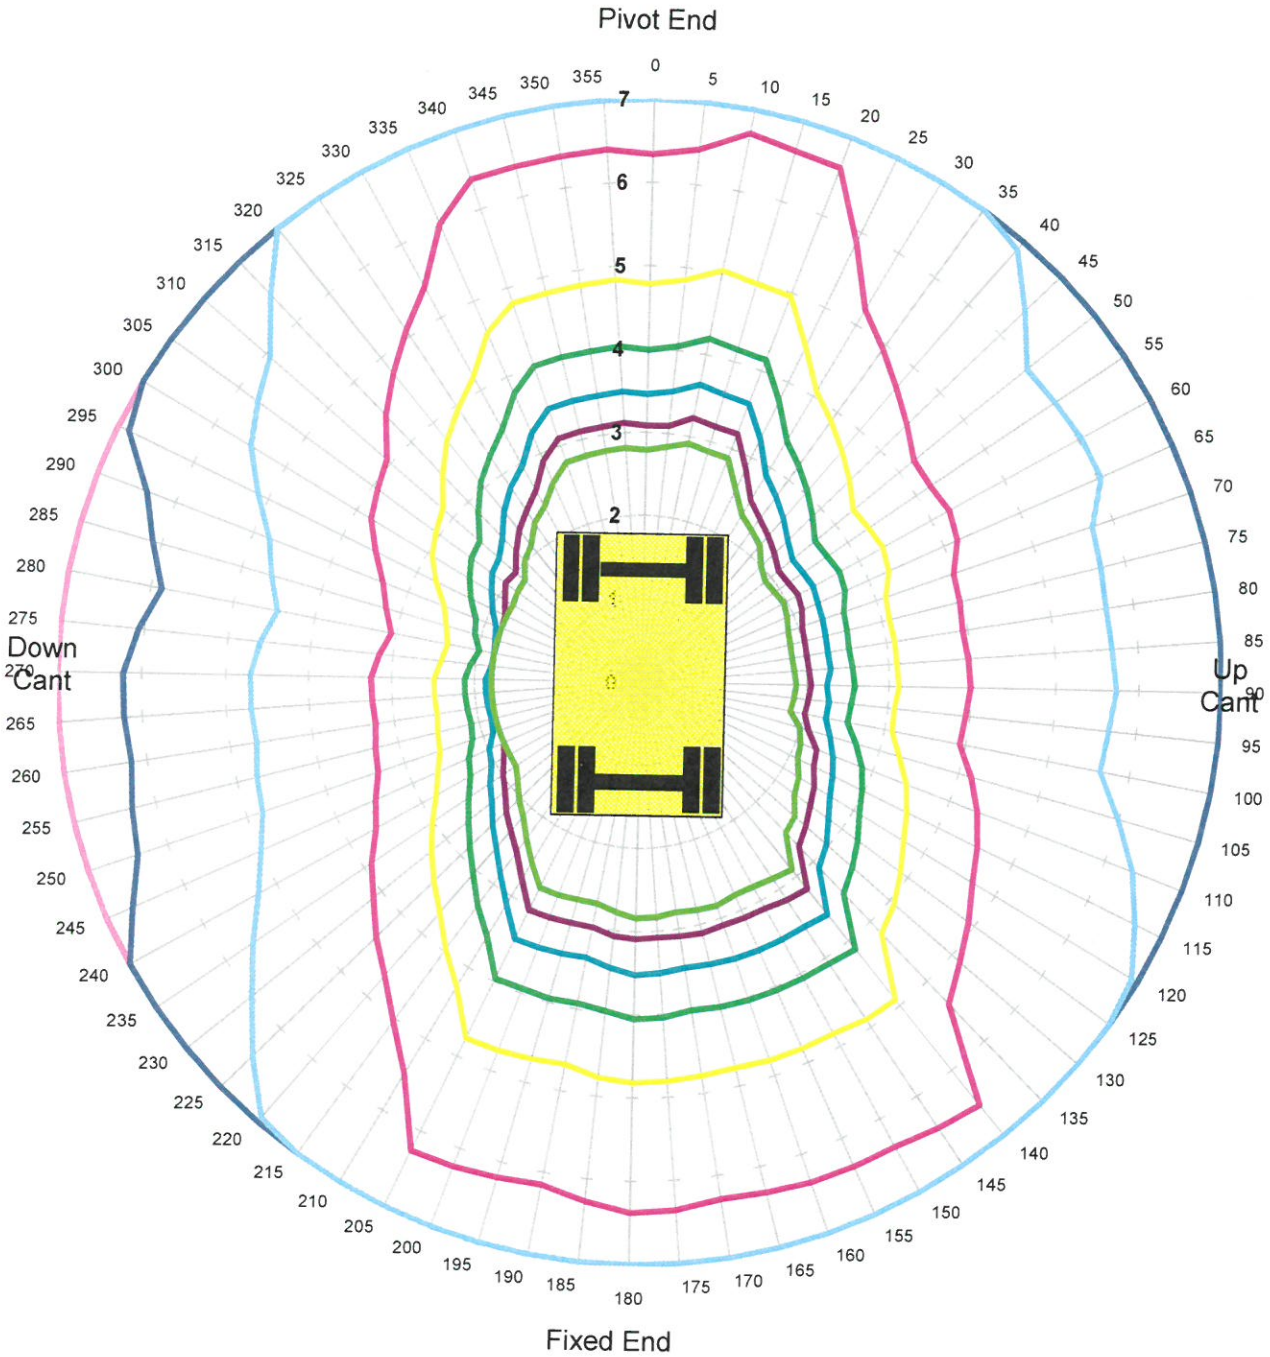

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 150mm

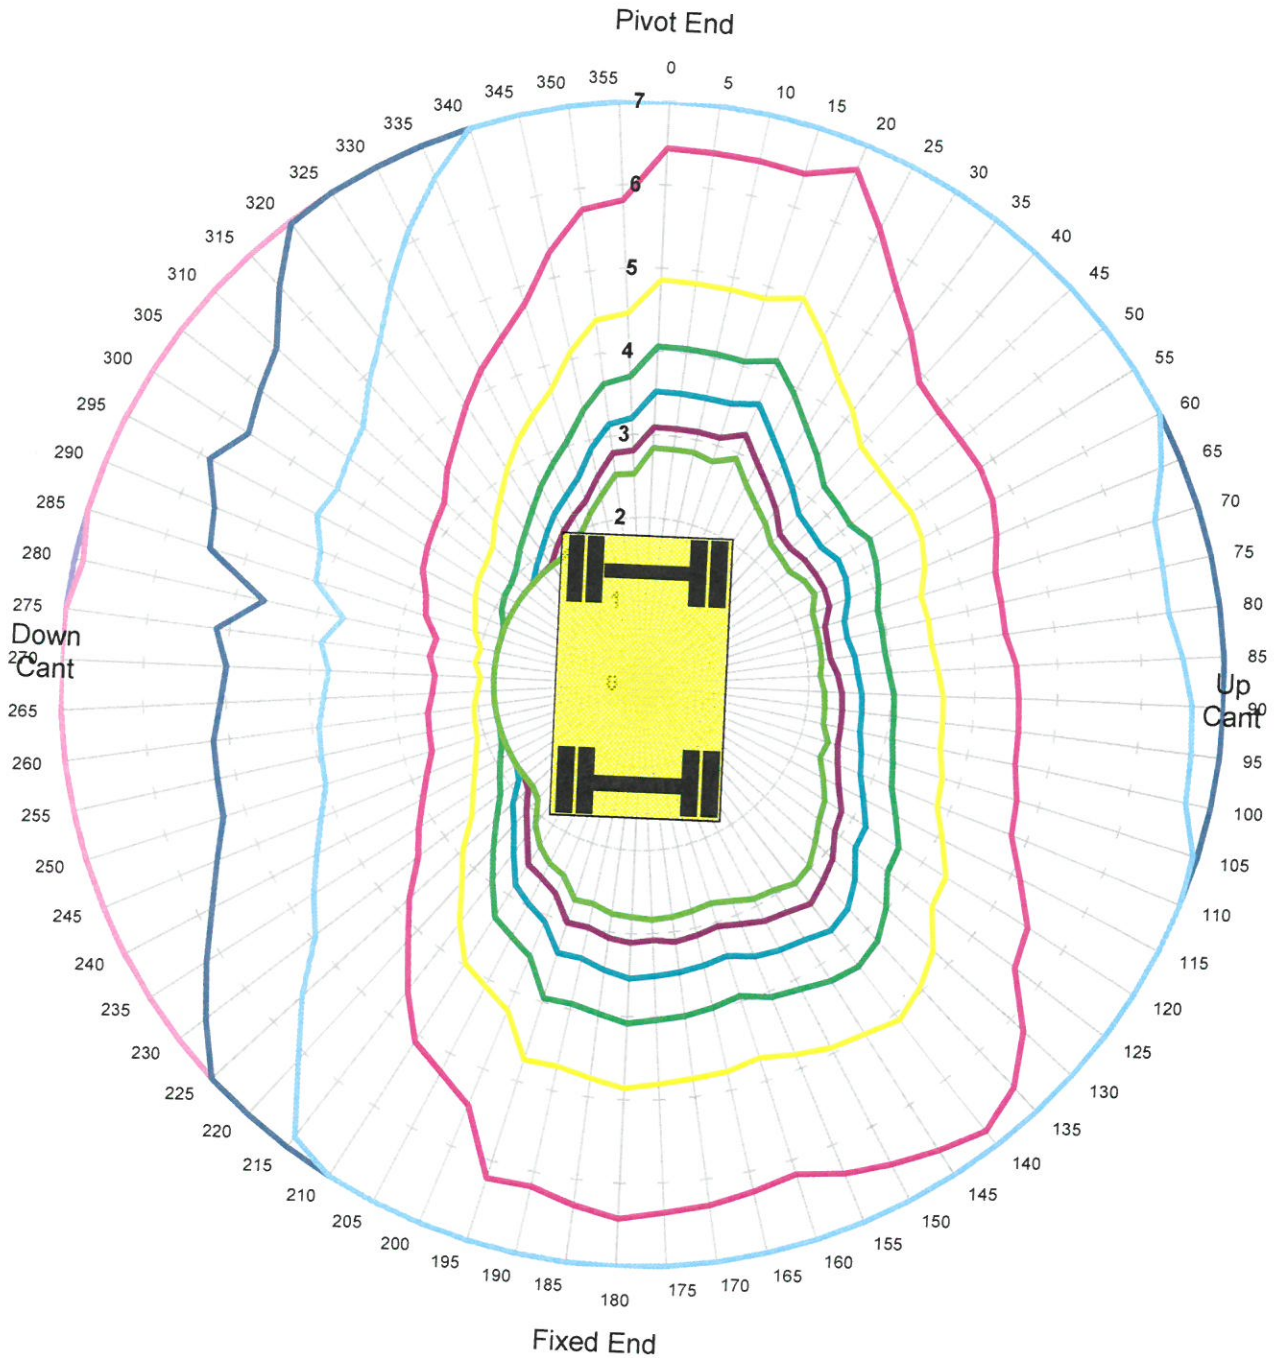

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

File Ref: stobart rail doosan 260

Date Chart Printed: 21/04/2017

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant -150mm Tandem Lift

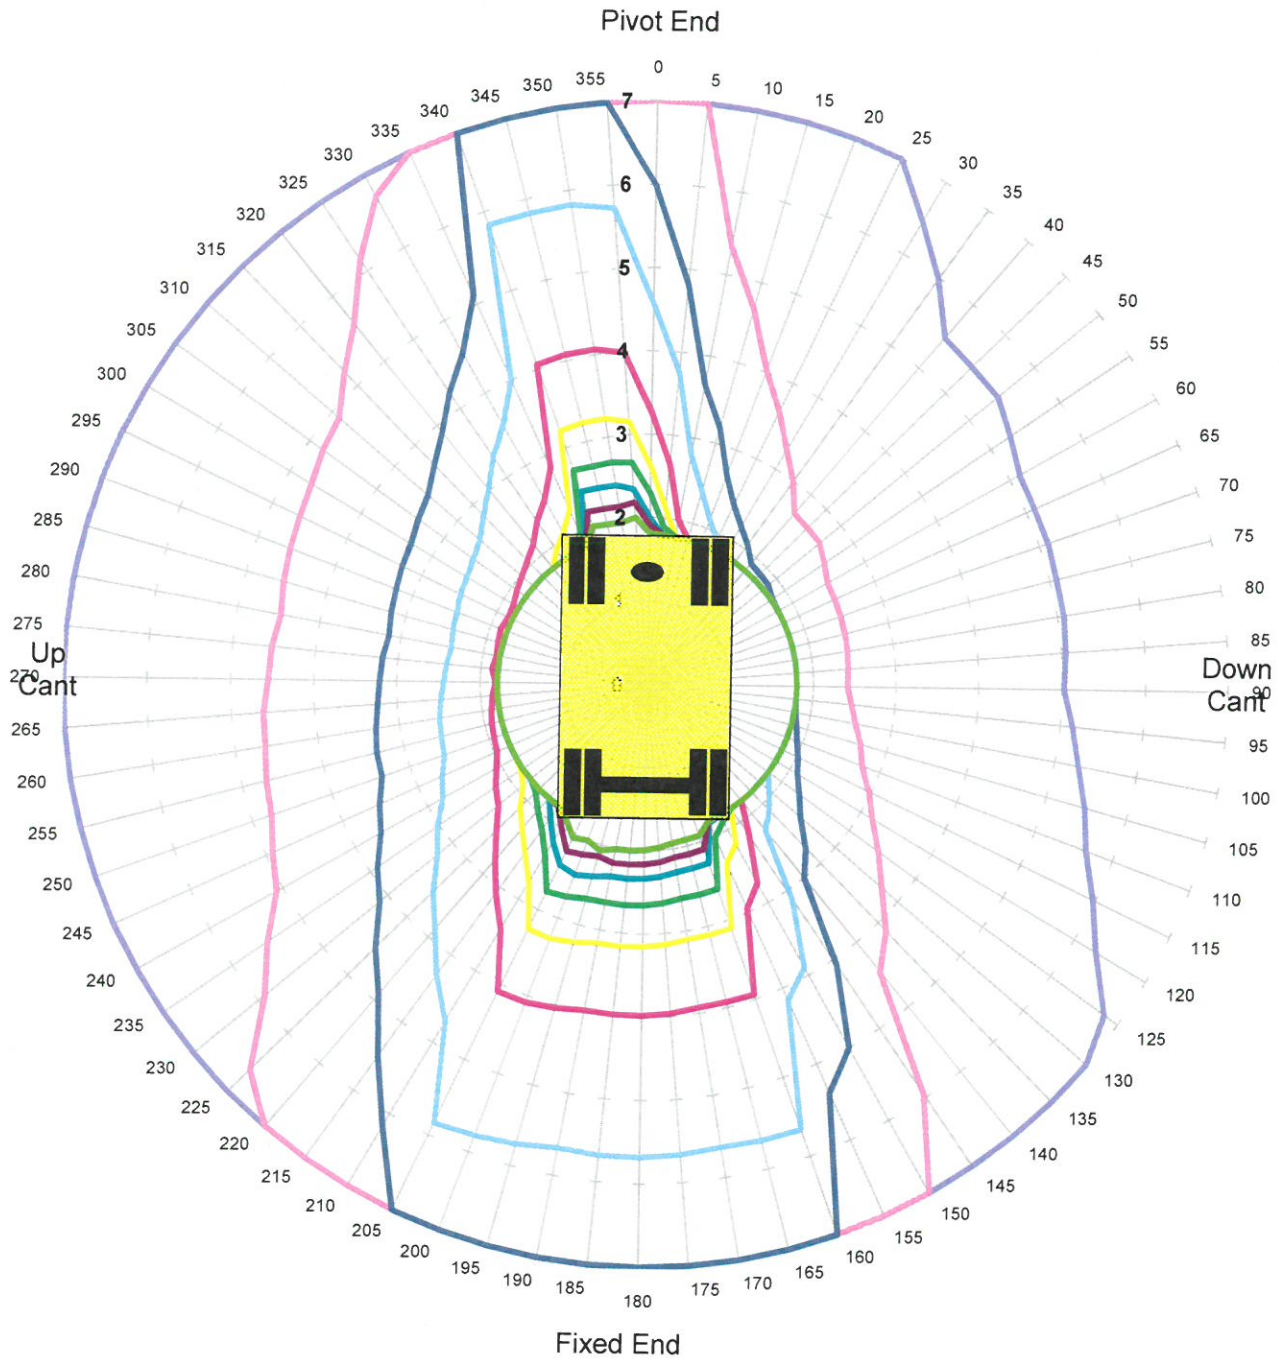

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant -50mm Tandem Lift

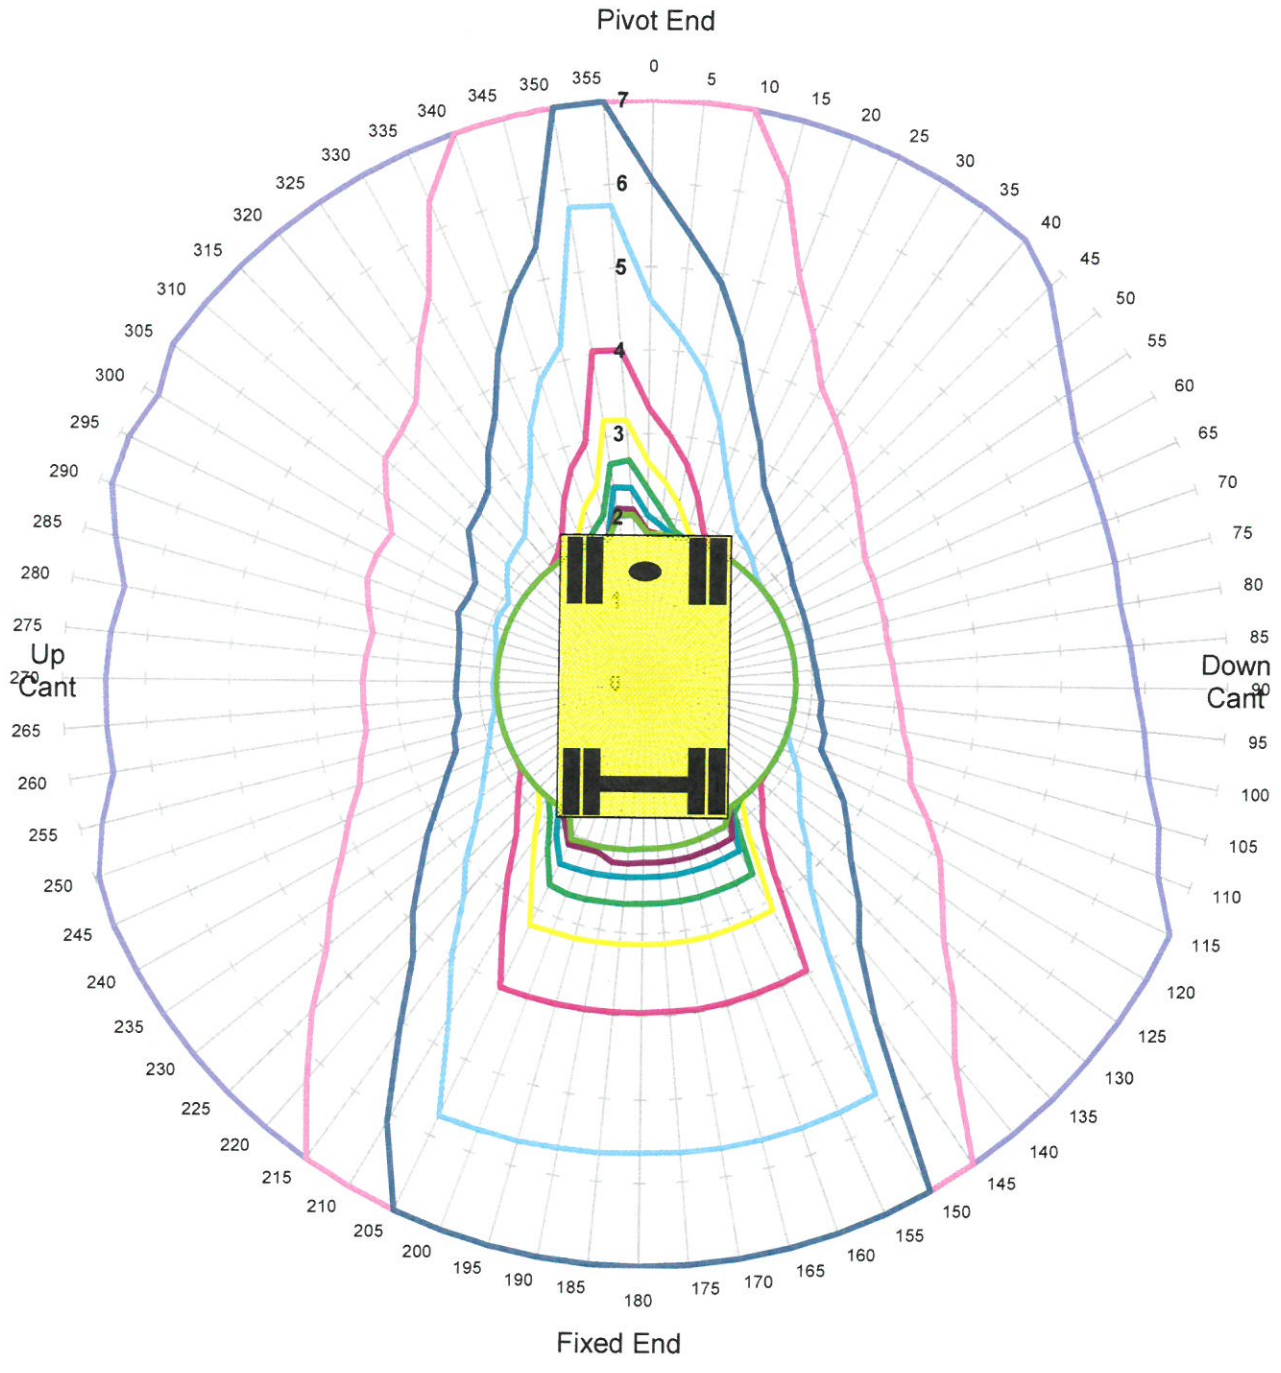

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 50mm Tandem Lift

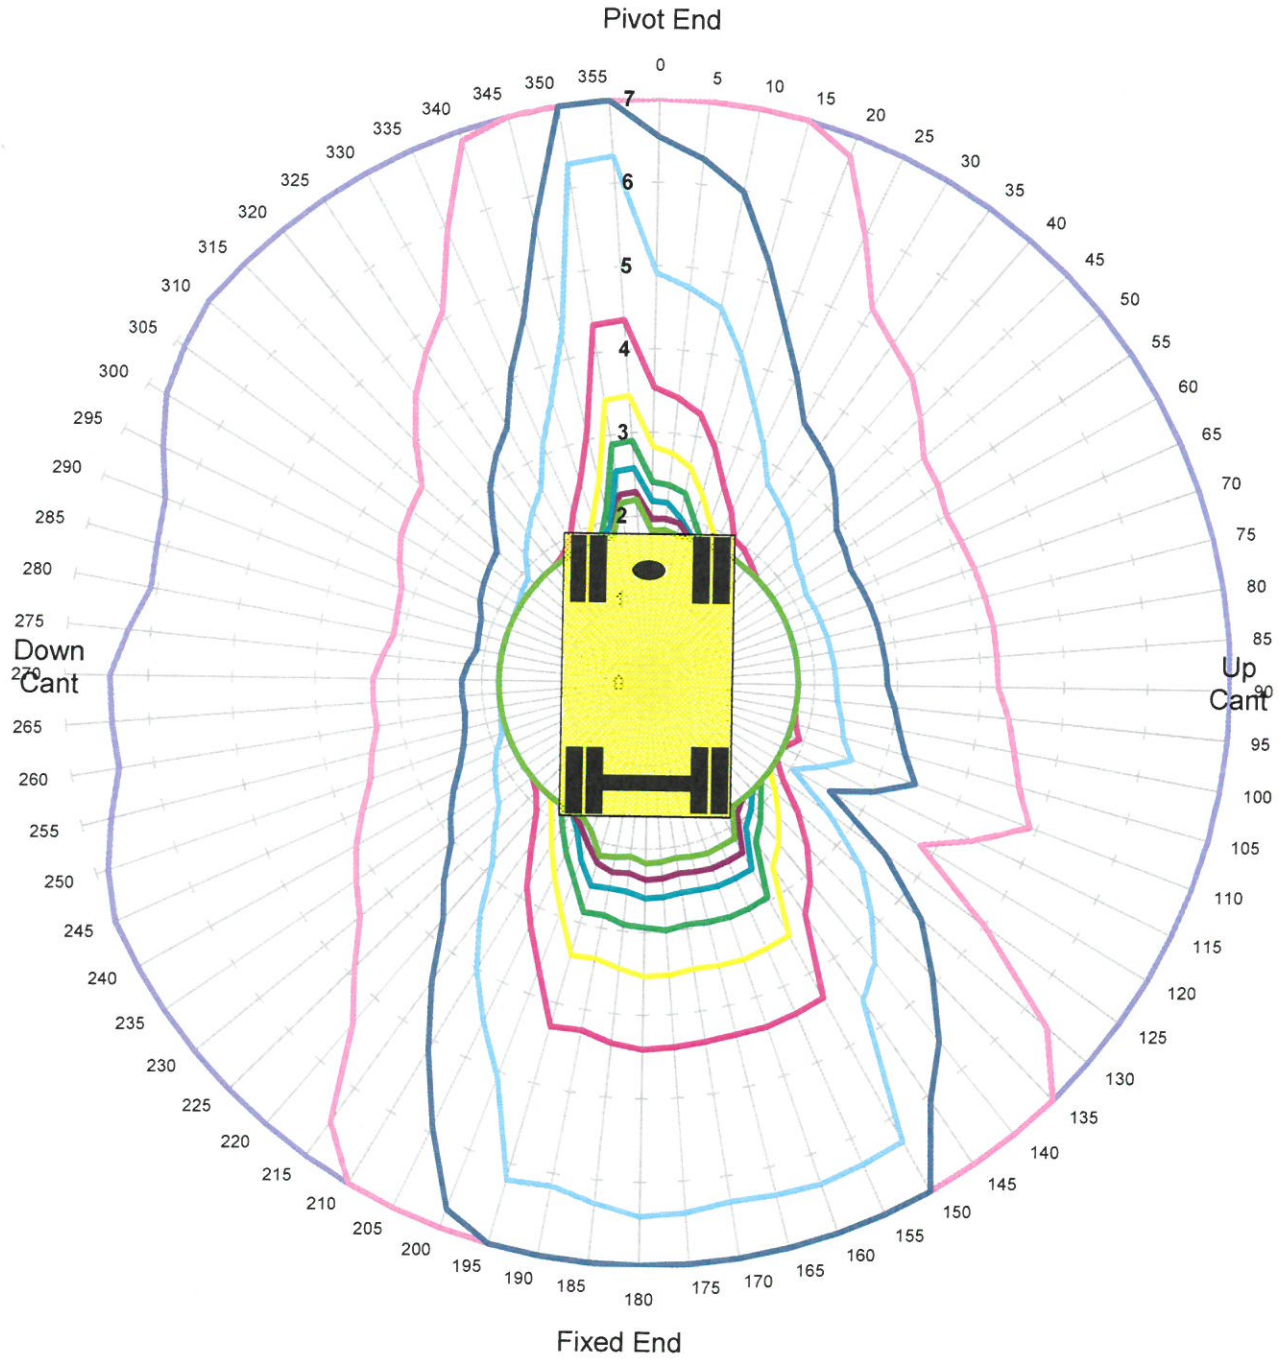

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Unlocked Rail Cant 150mm Tandem Lift

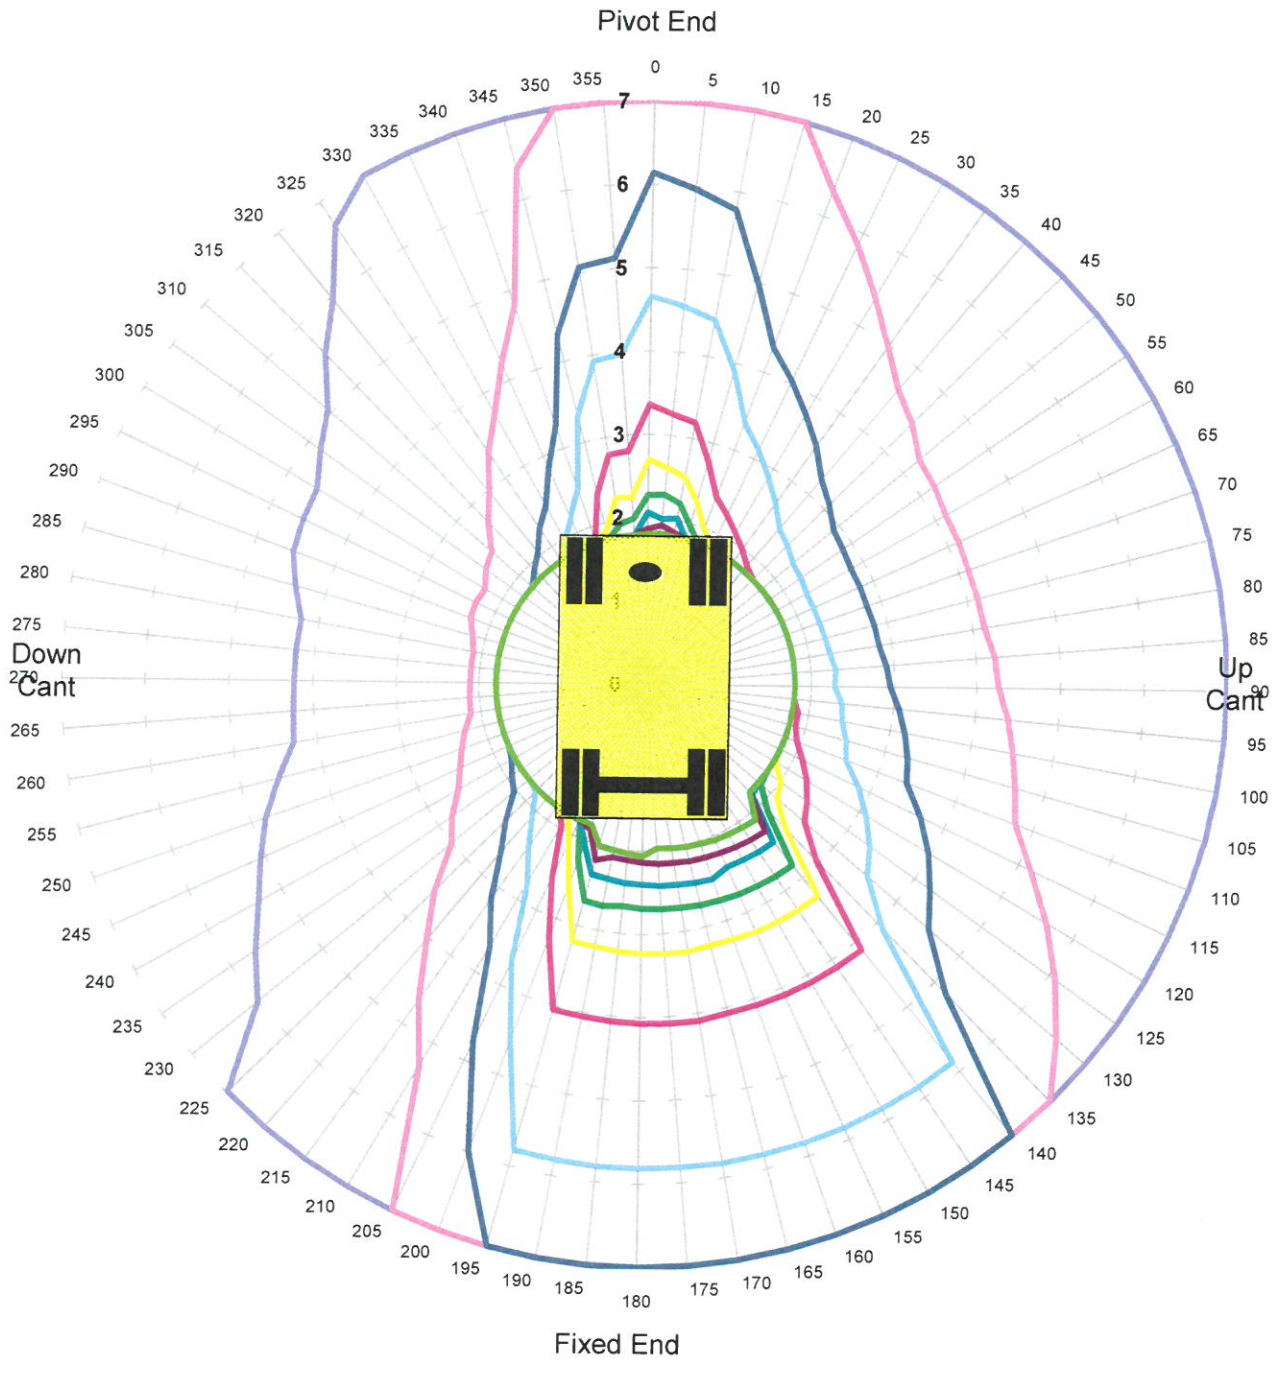

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant -150mm Tandem Lift

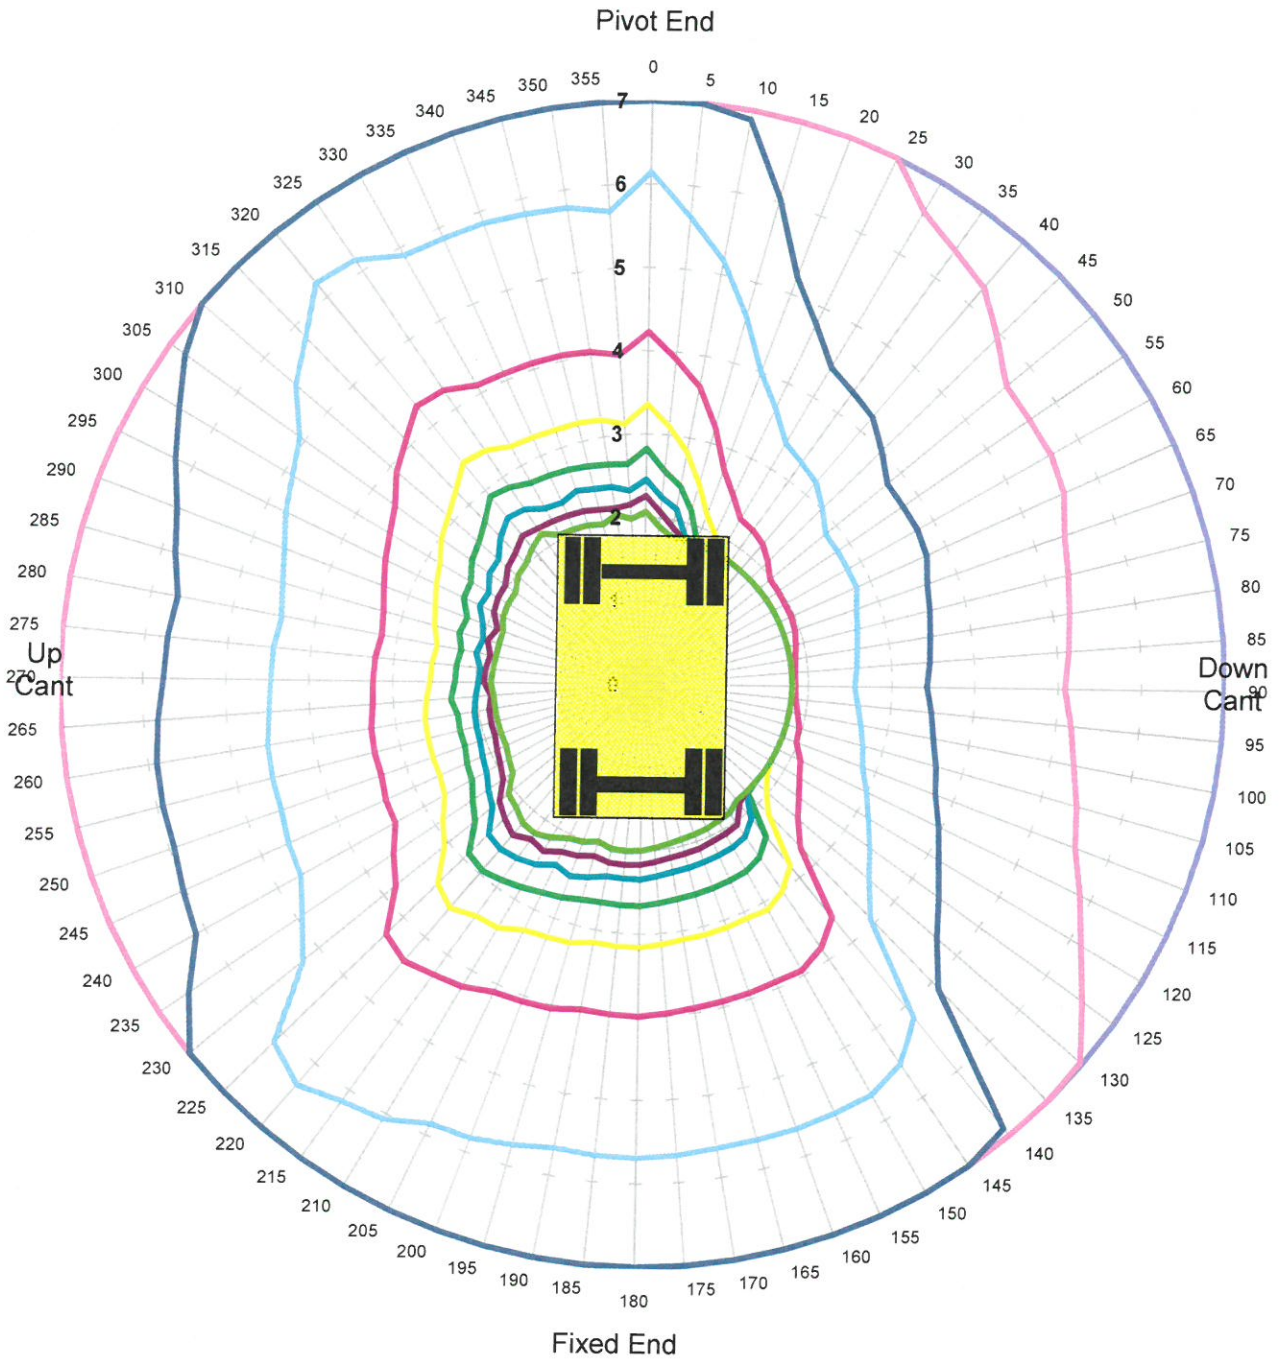

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant -50mm Tandem Lift

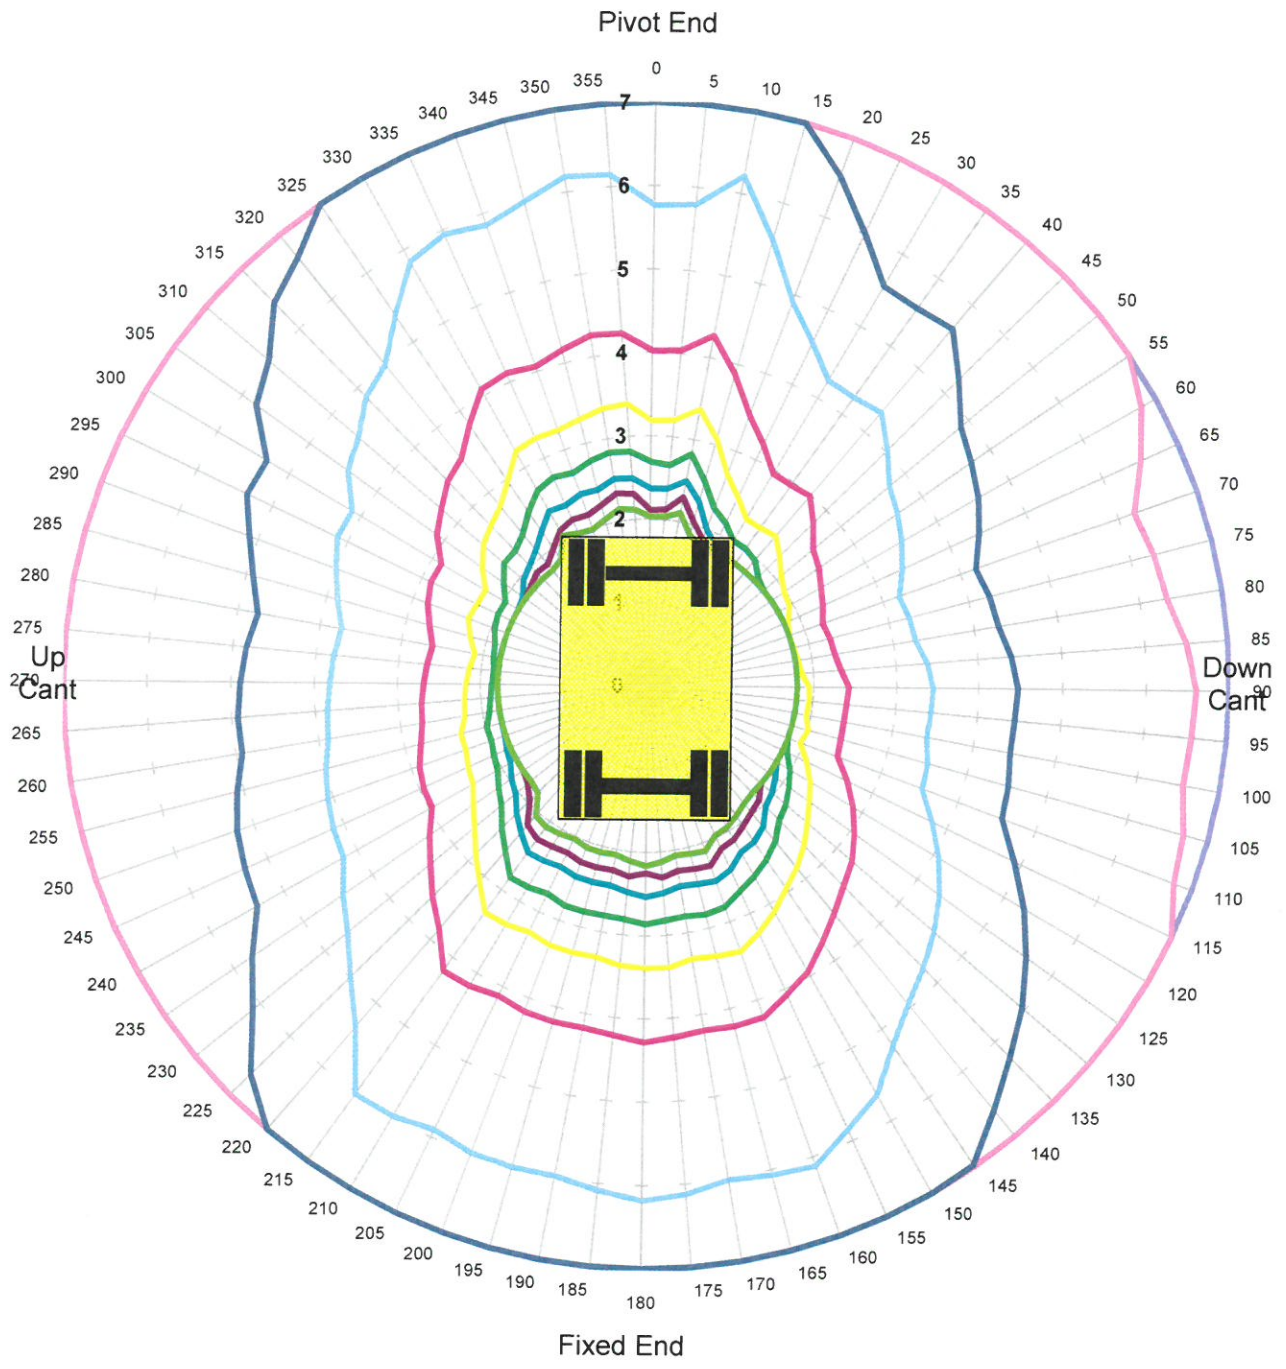

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 150mm Tandem Lift

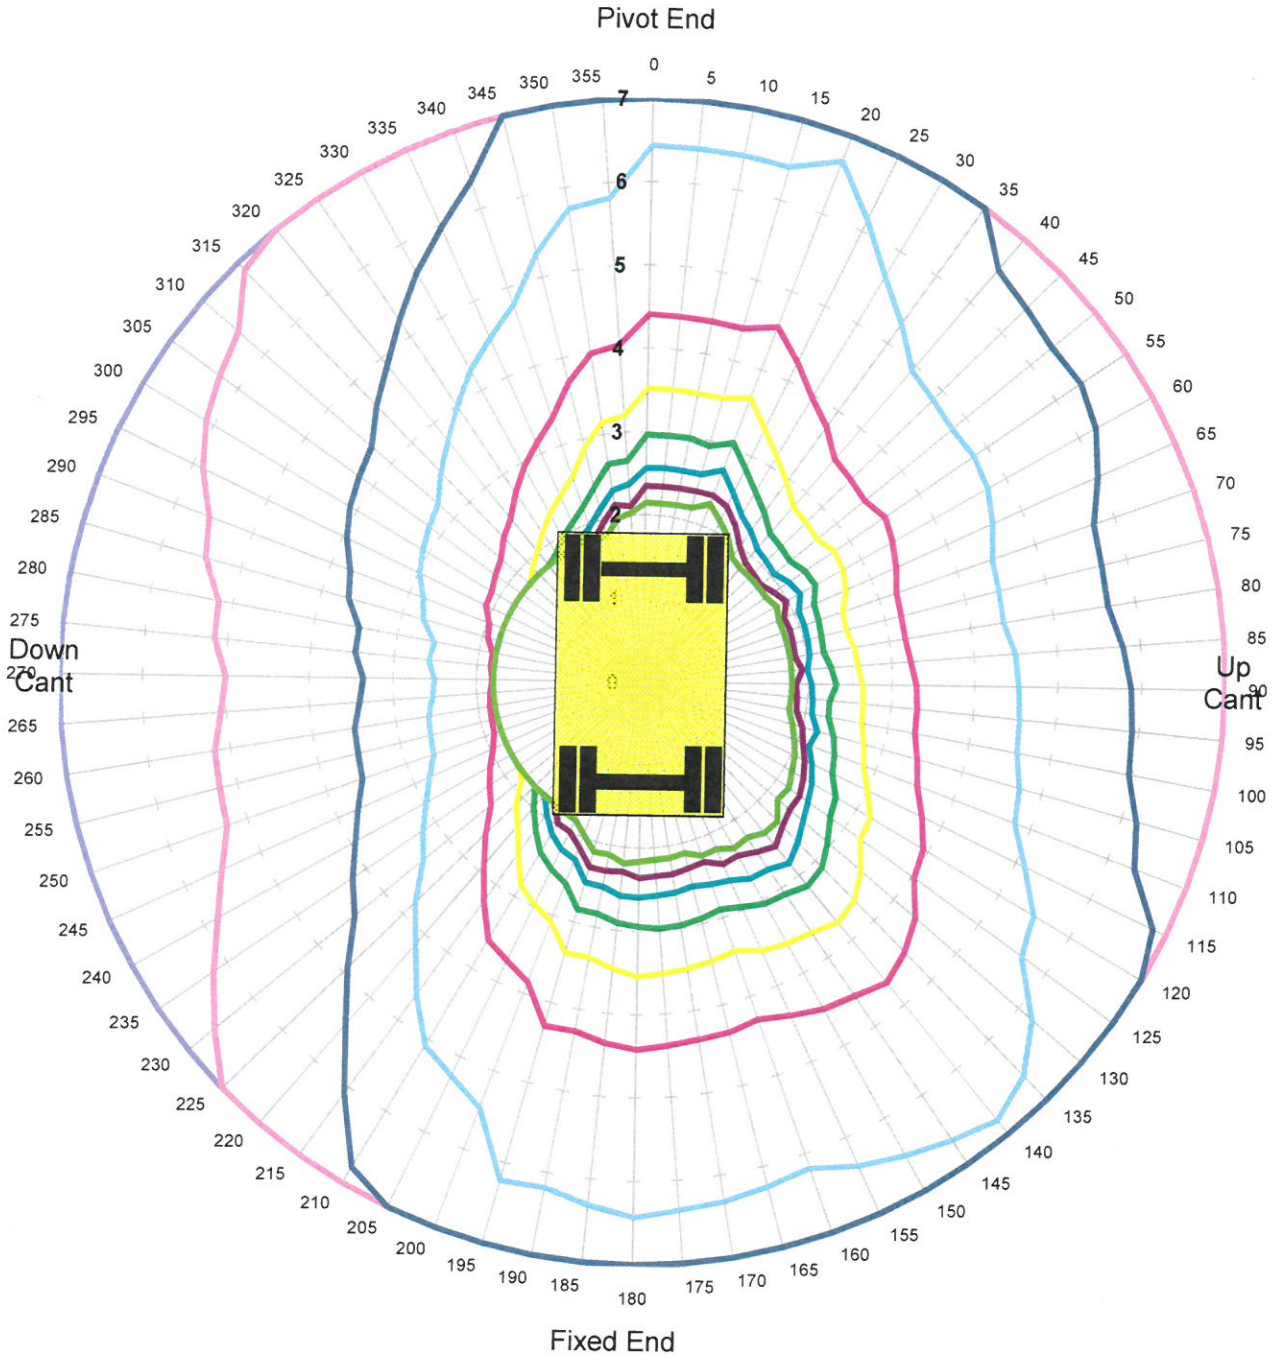

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Unlocked Rail Cant -150mm

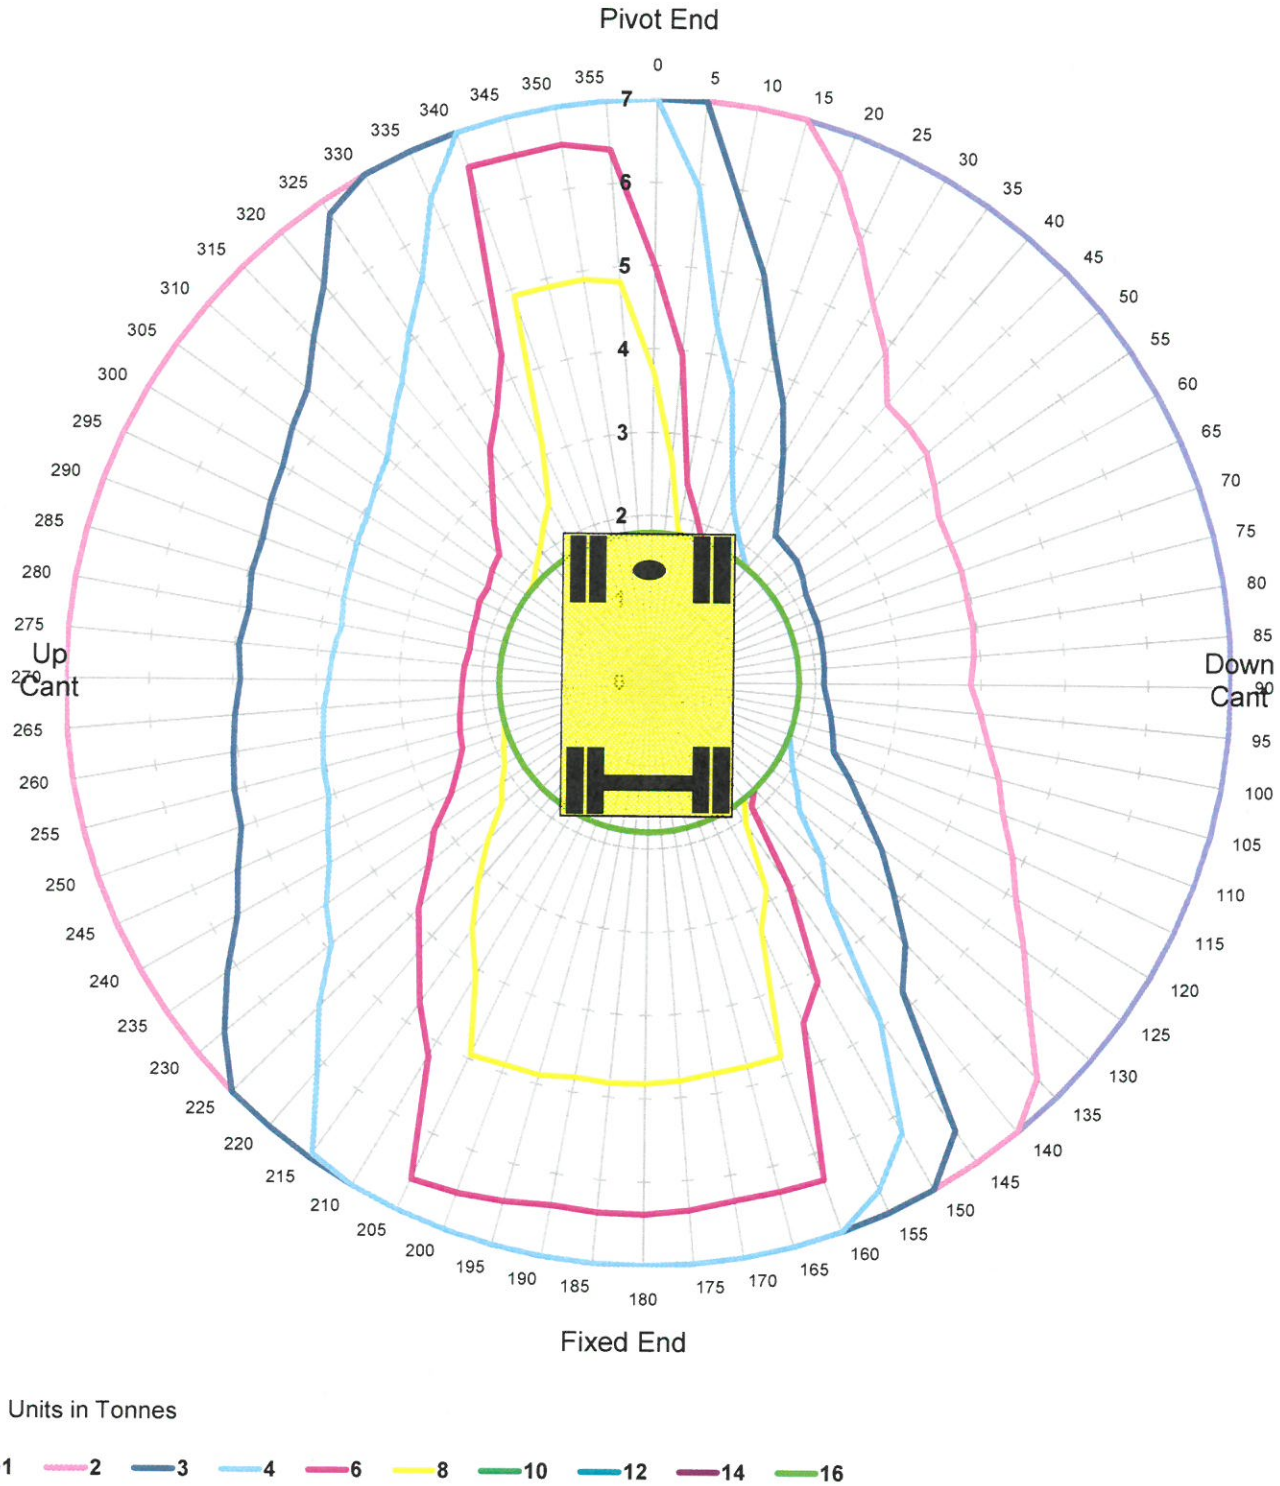

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Unlocked Rail Cant 150mm

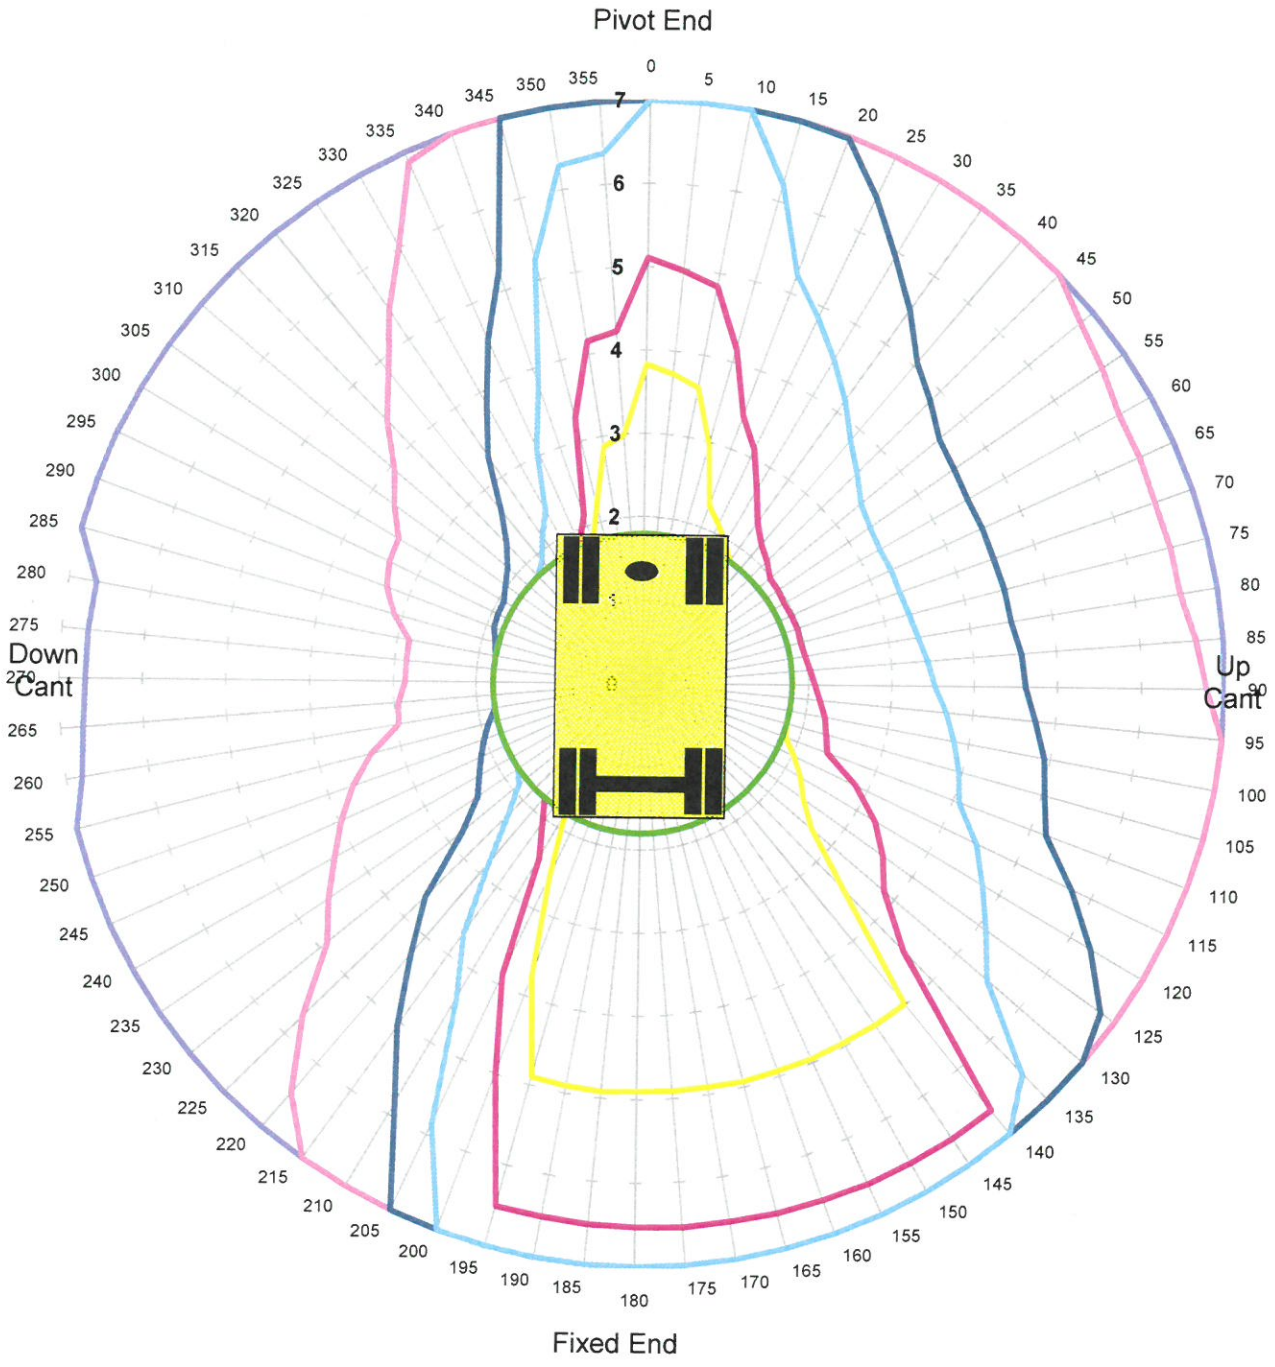

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Unlocked Rail Cant 50mm

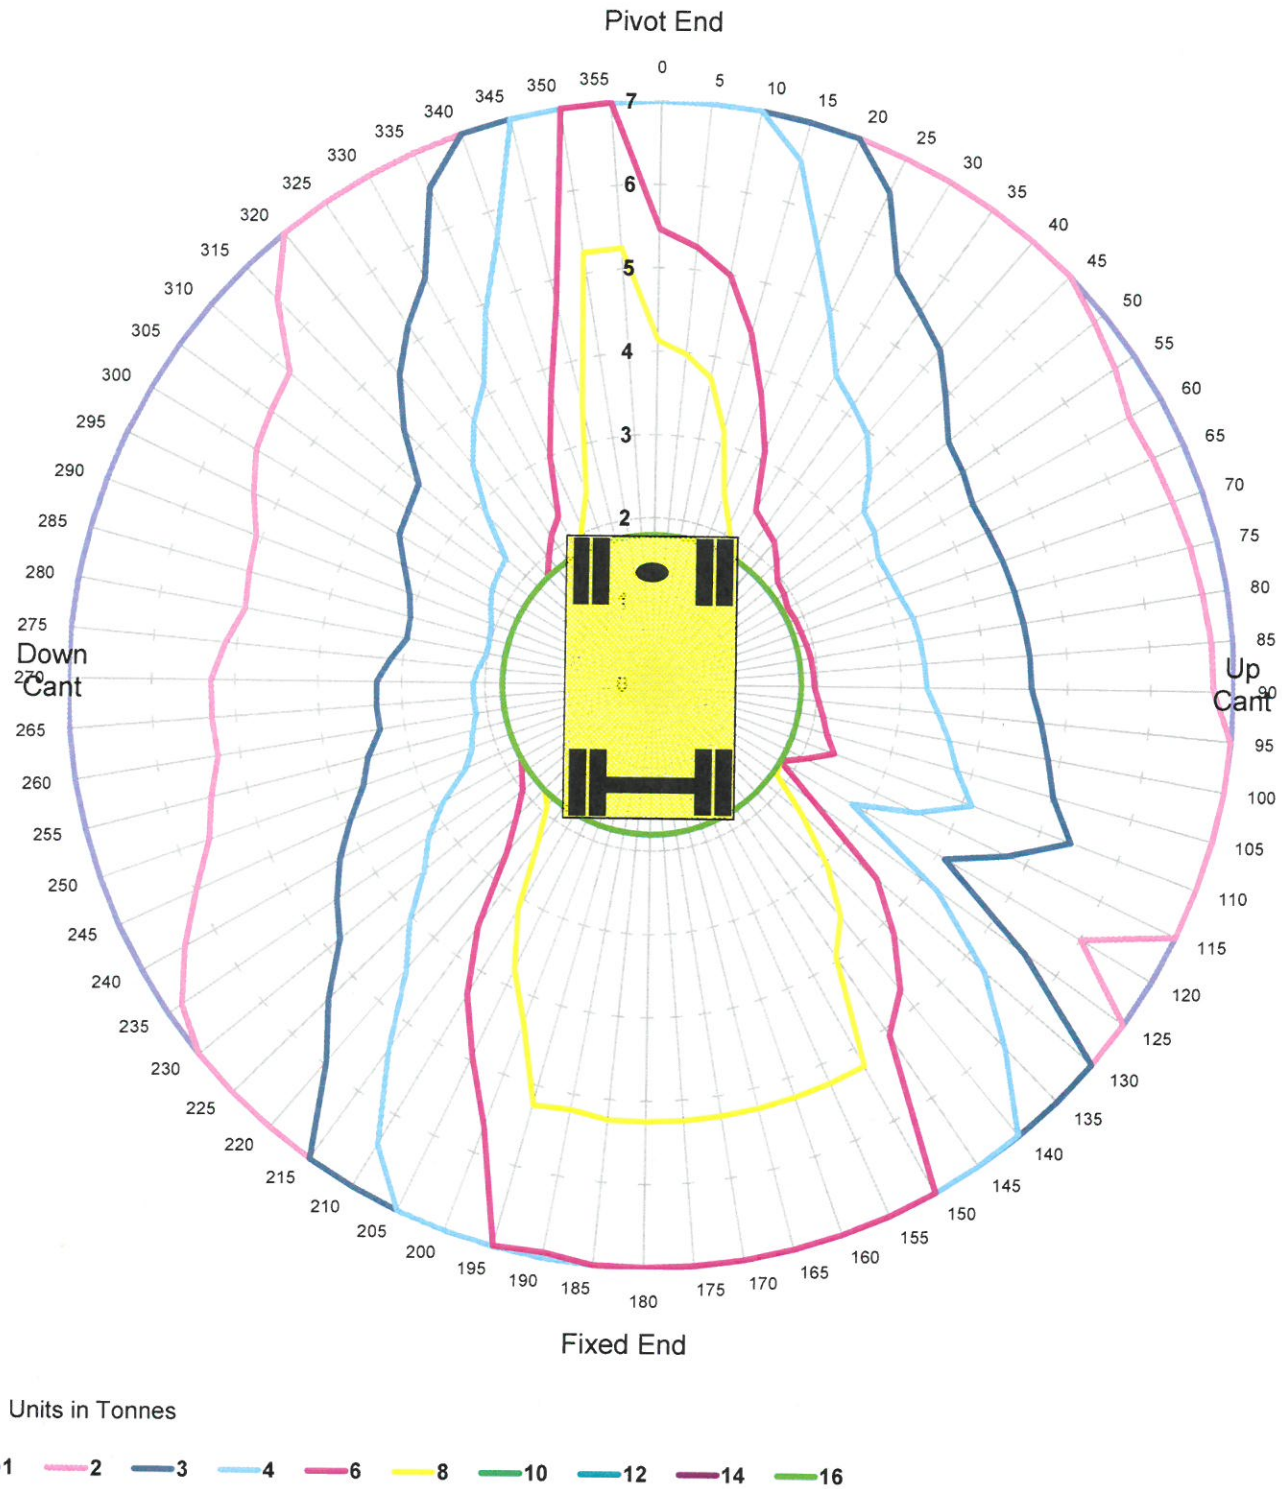

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Locked Rail Cant -150mm

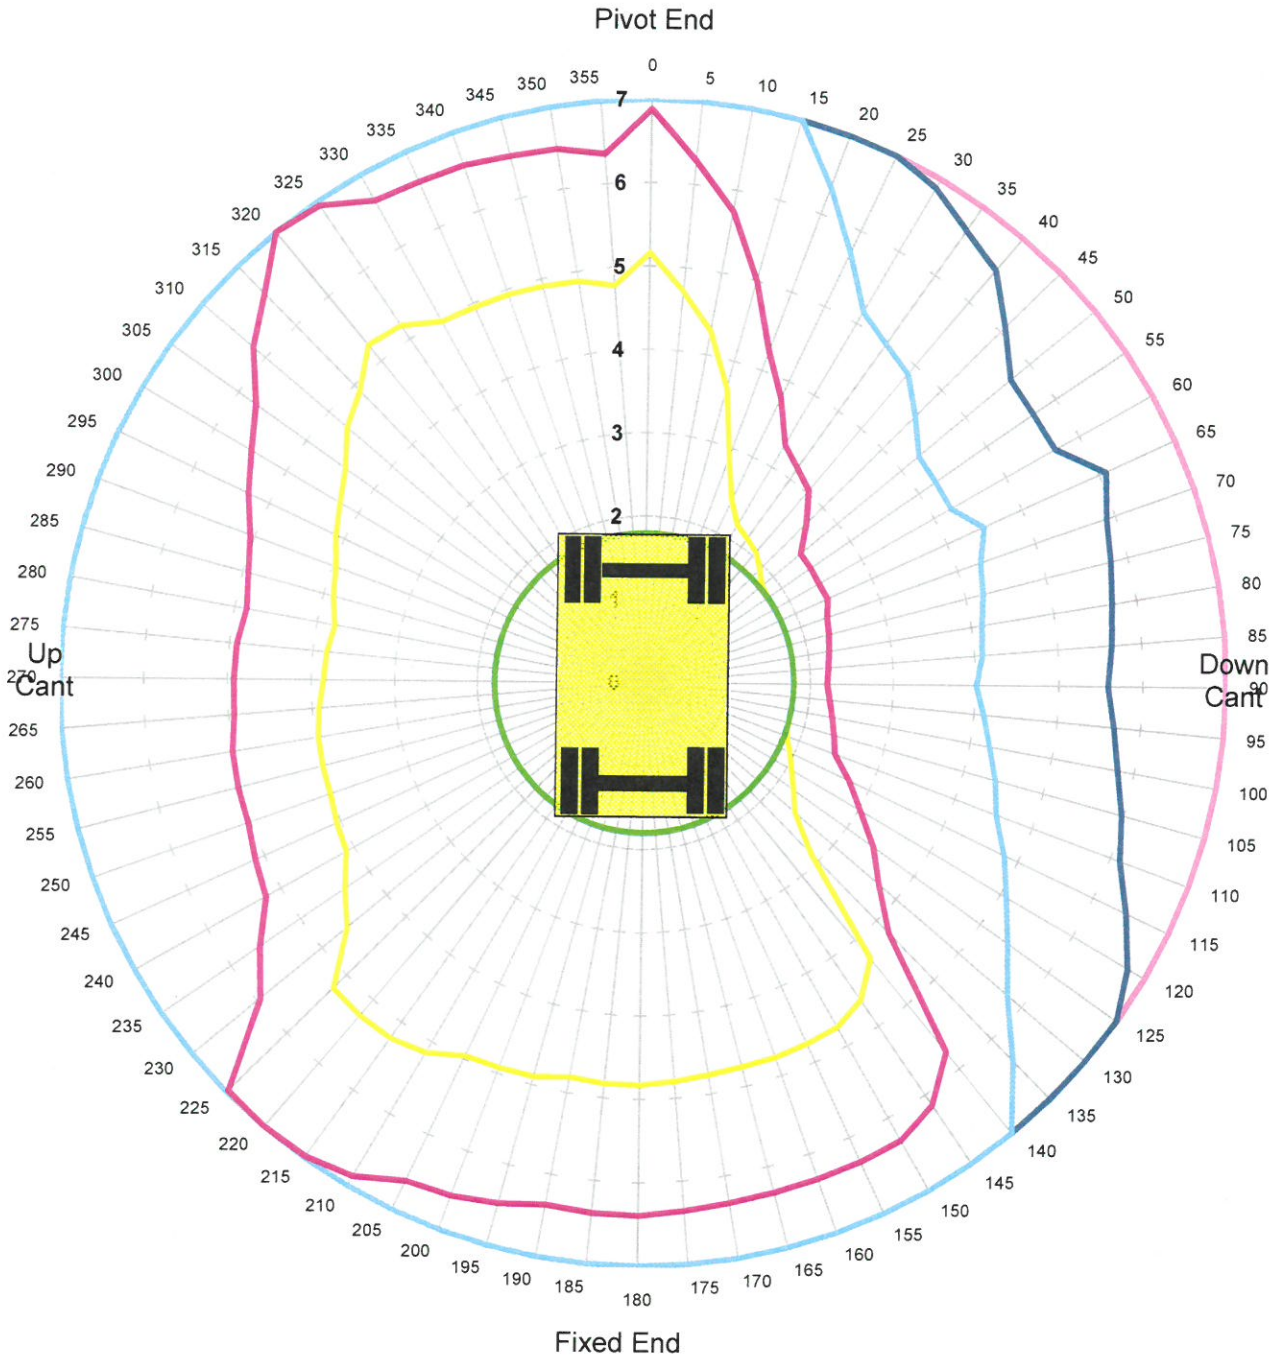

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Unlocked Rail Cant -50mm

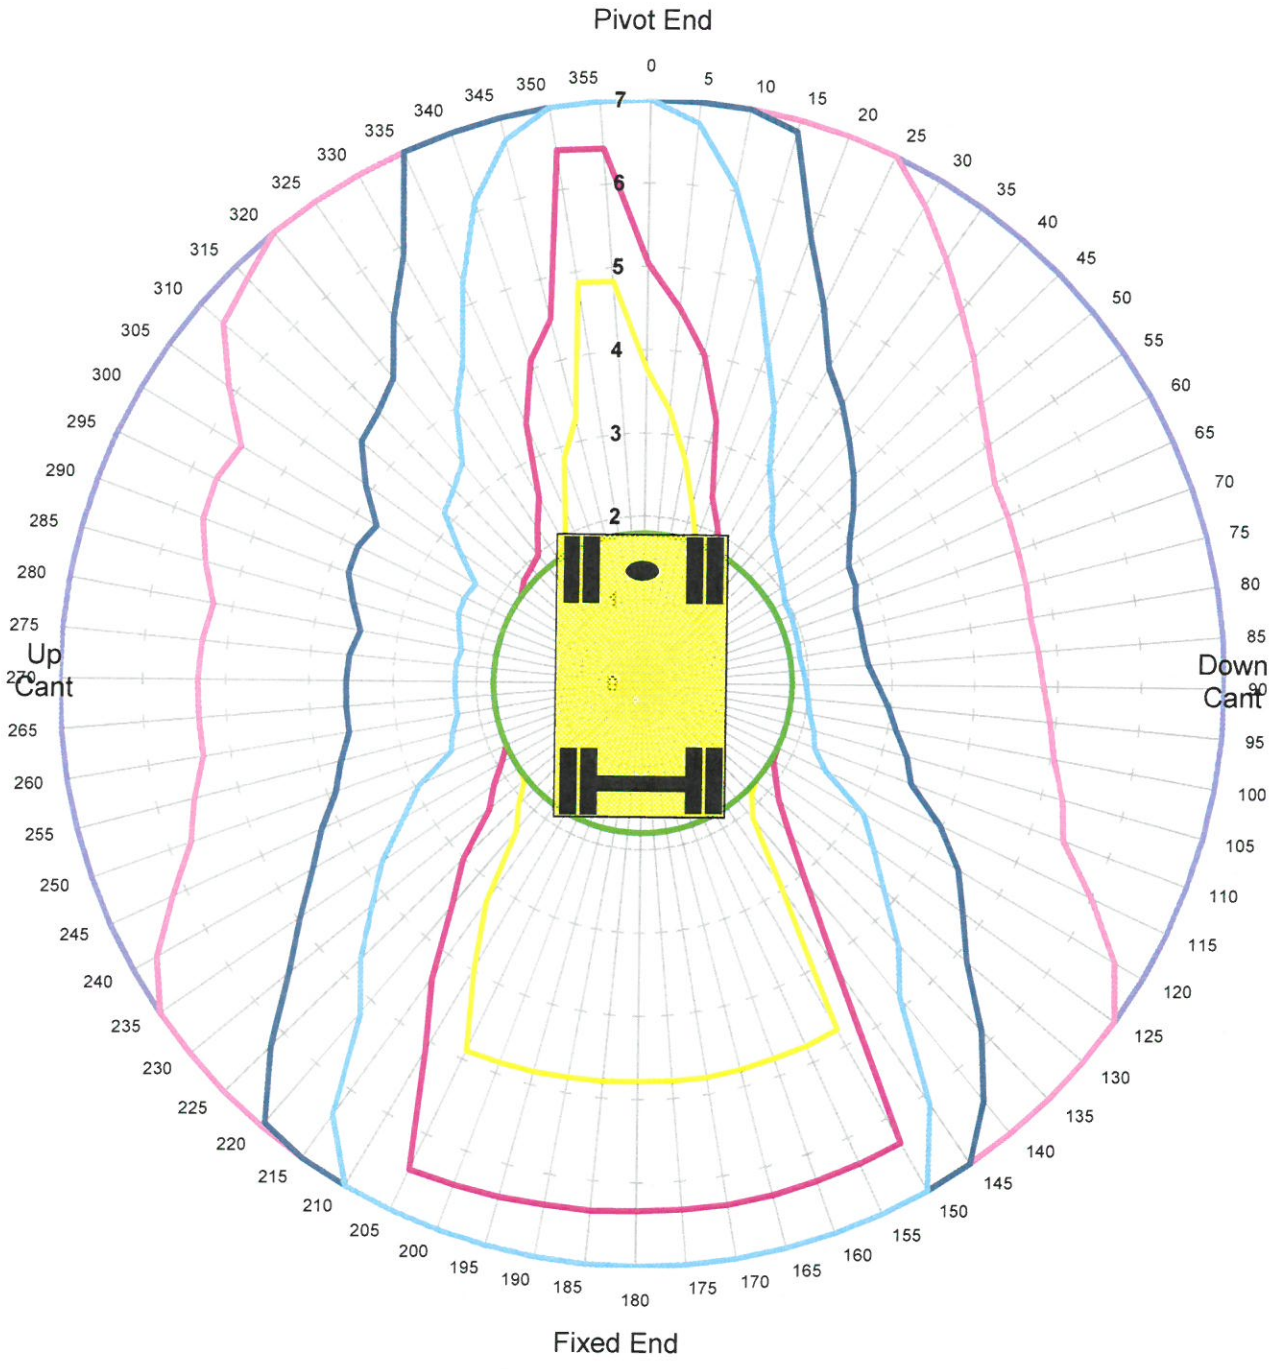

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 50mm Tandem Lift

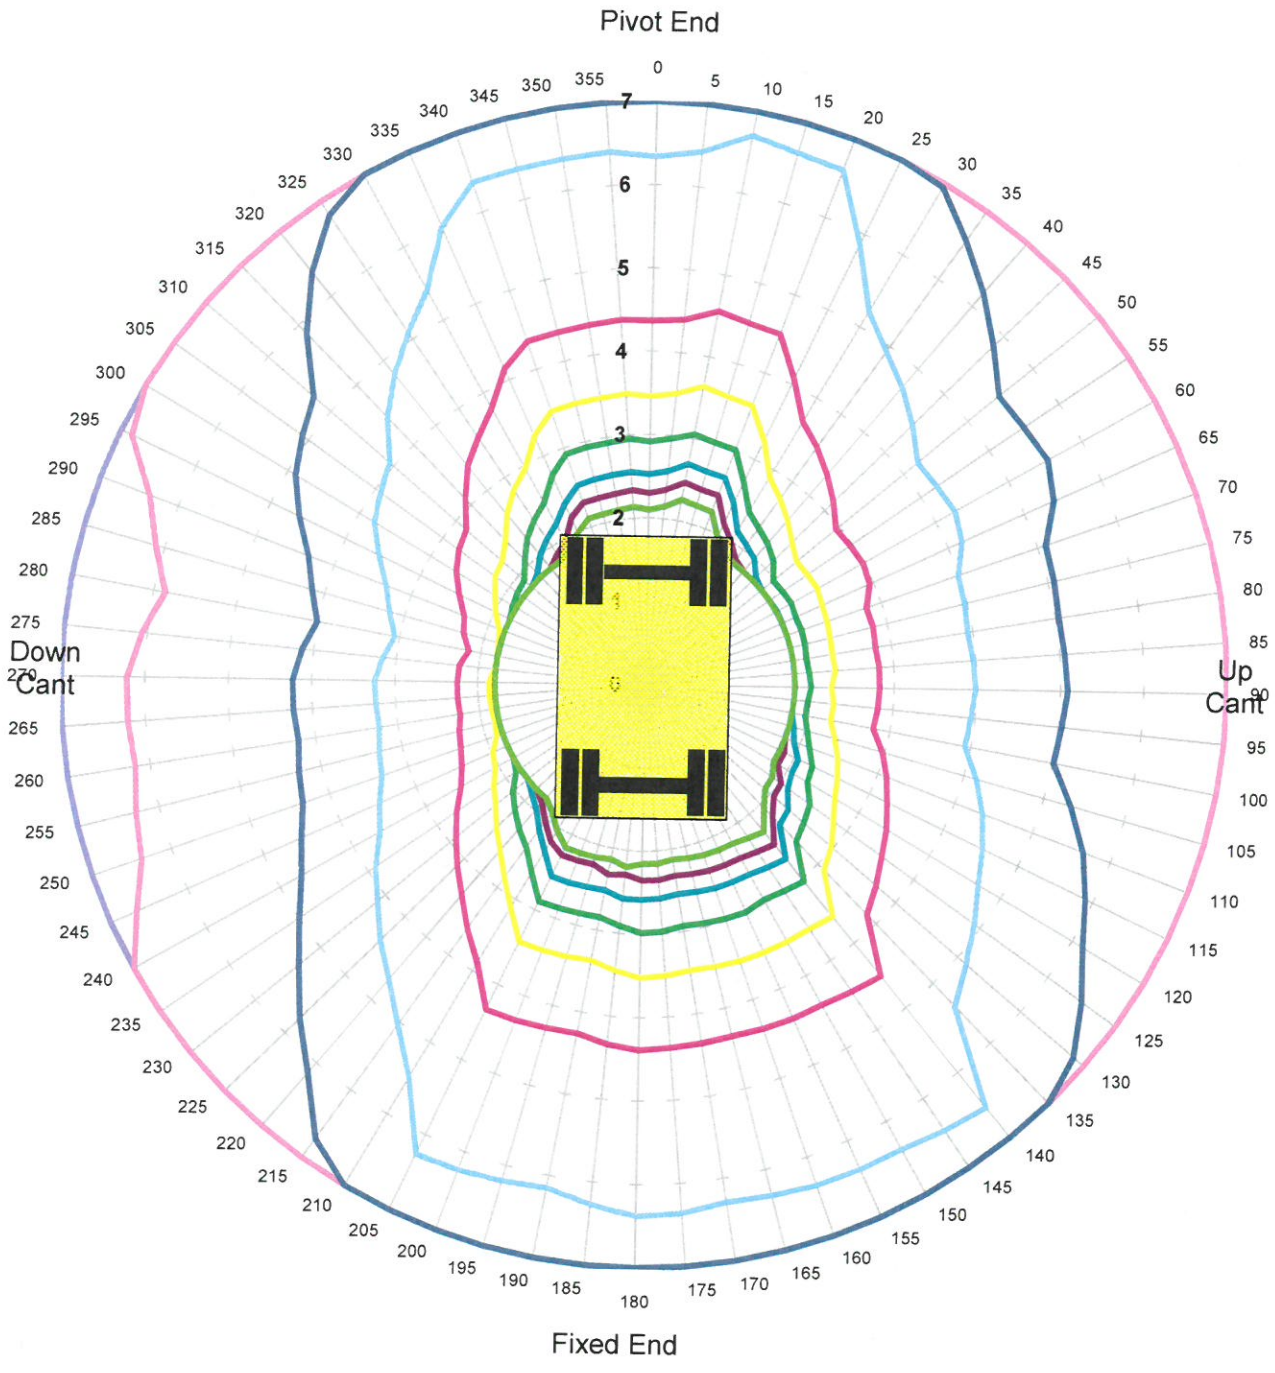

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Locked Rail Cant -50mm

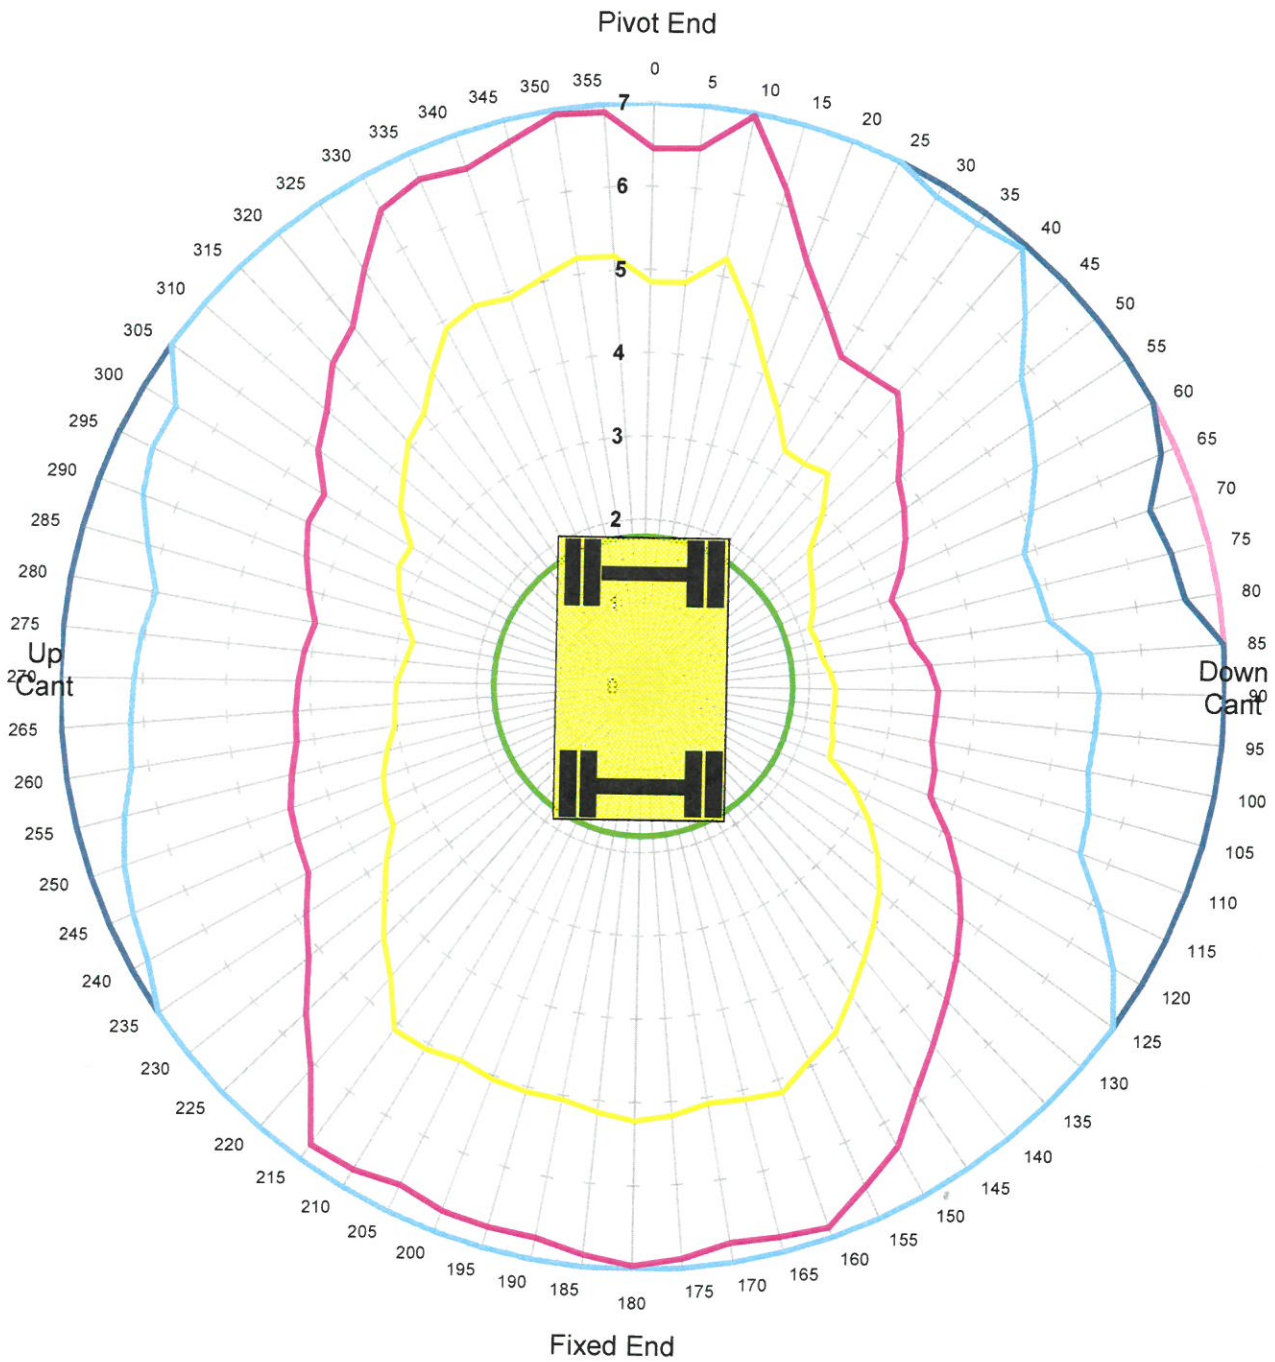

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Locked Rail Cant 50mm

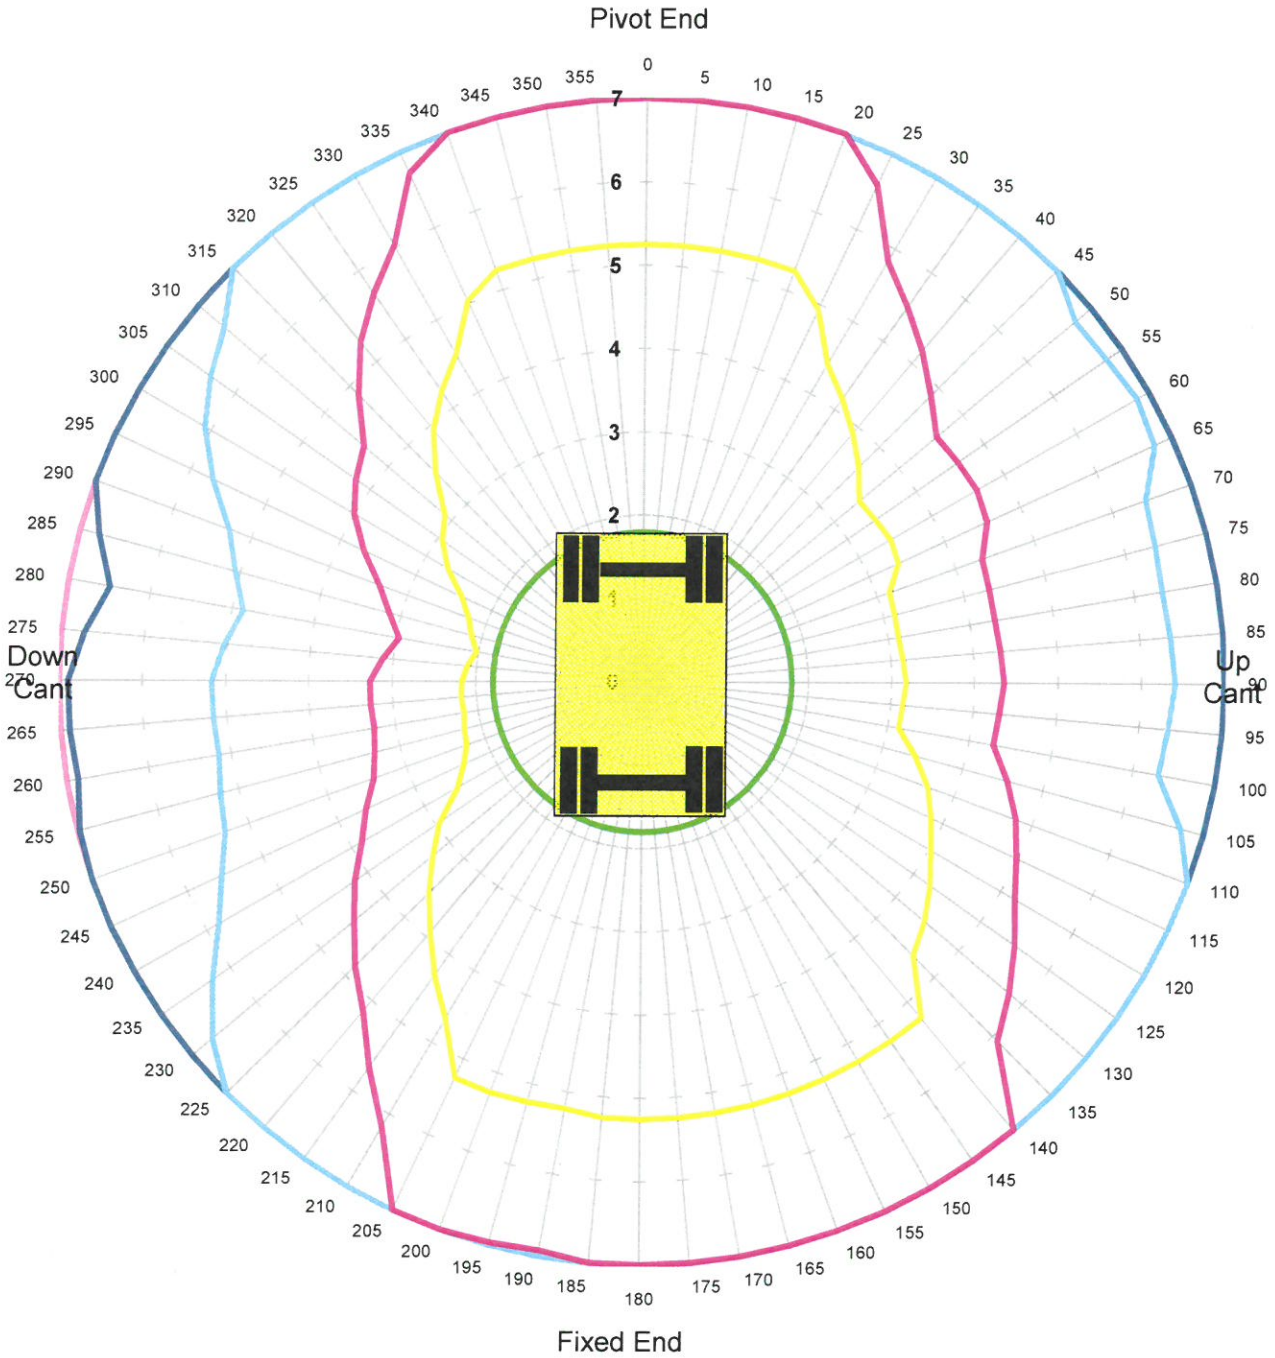

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Locked Rail Cant 150mm

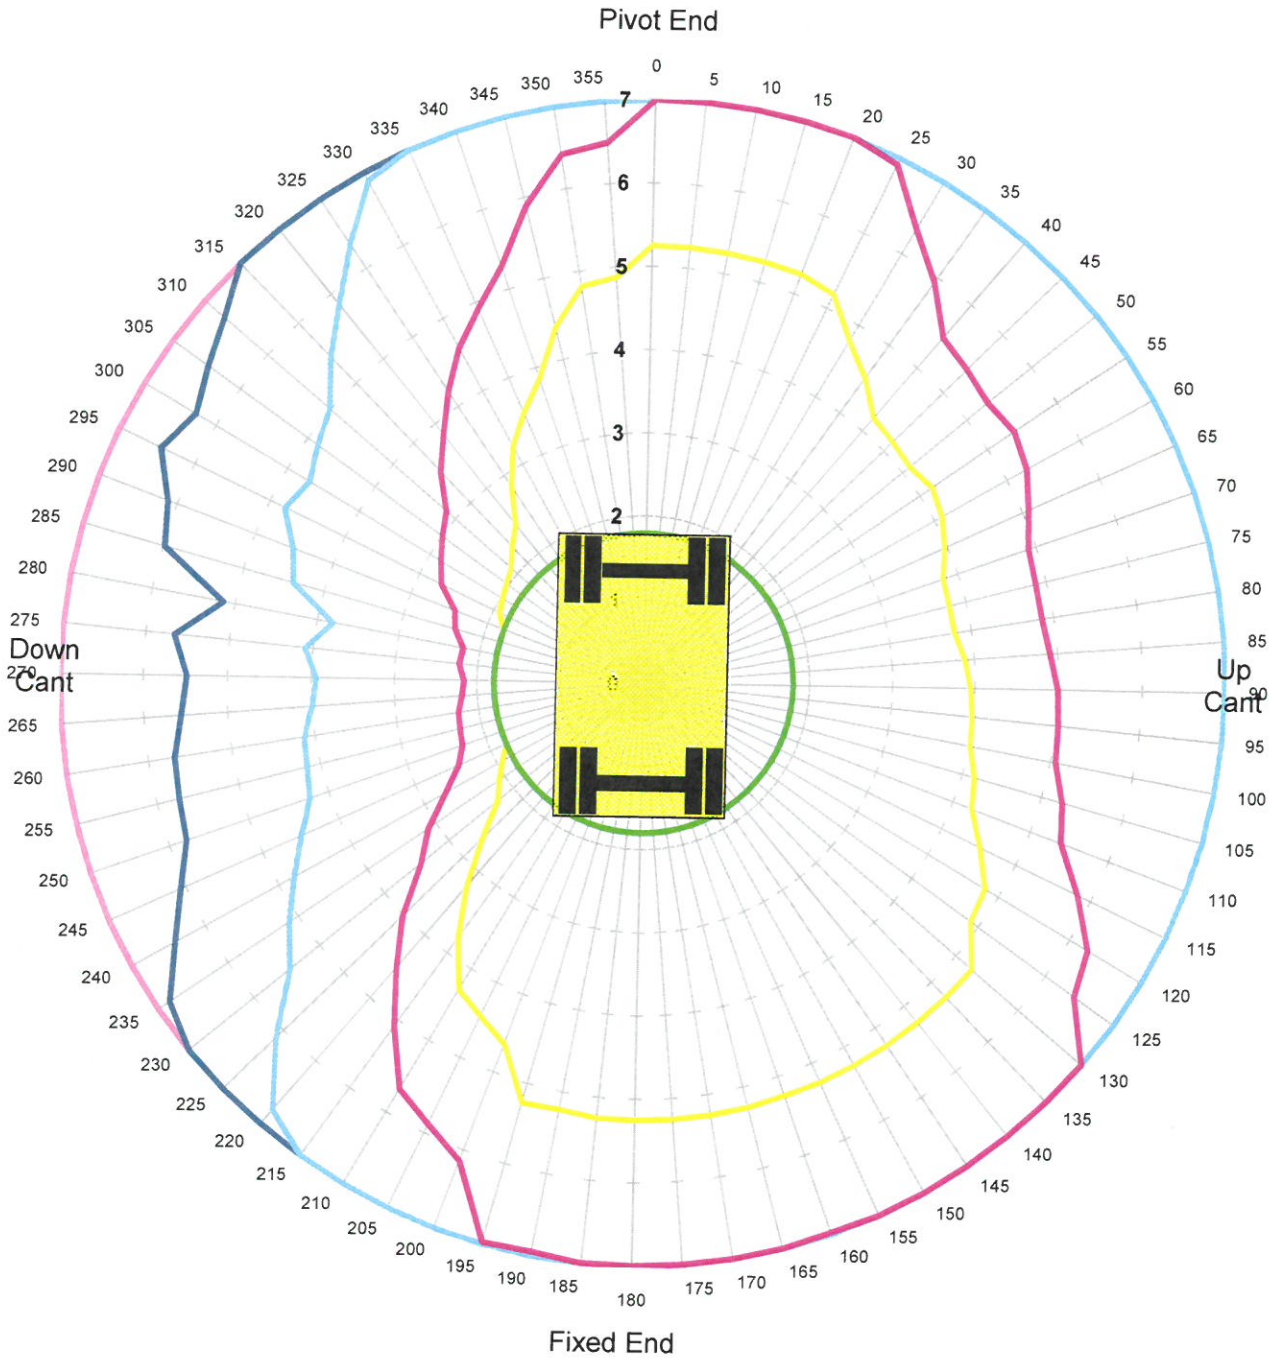

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Unlocked Rail Cant -150mm Tandem Lift

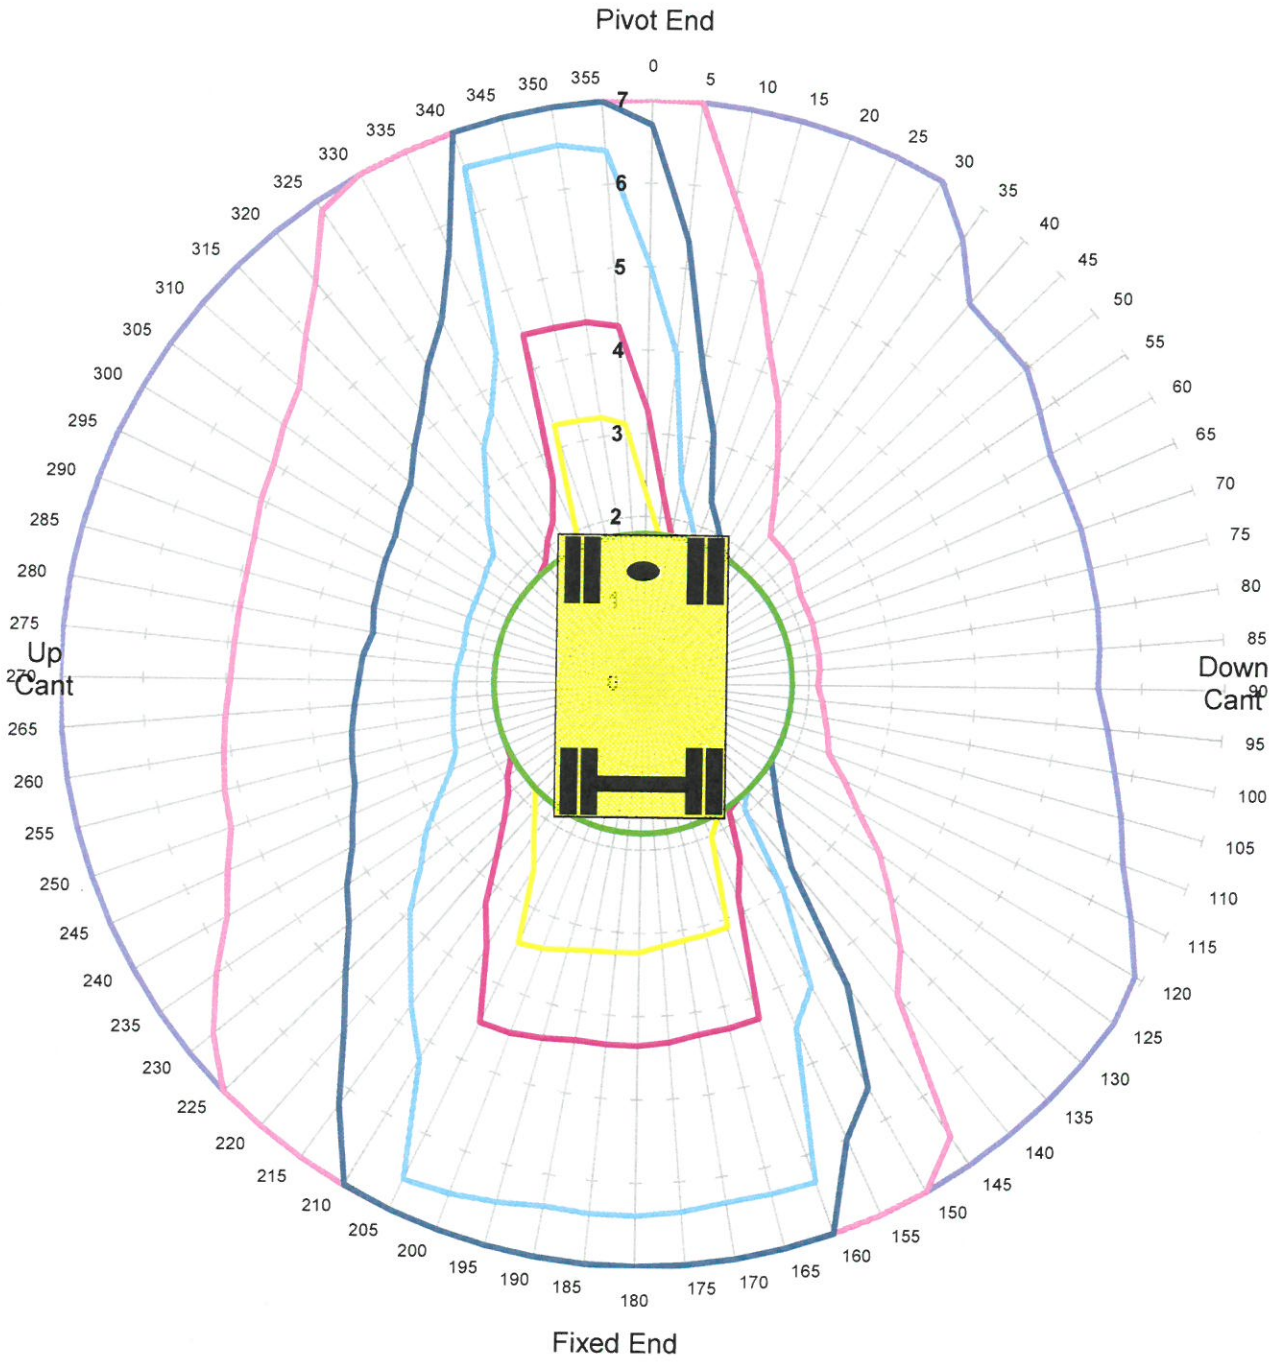

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Unlocked Rail Cant -50mm Tandem Lift

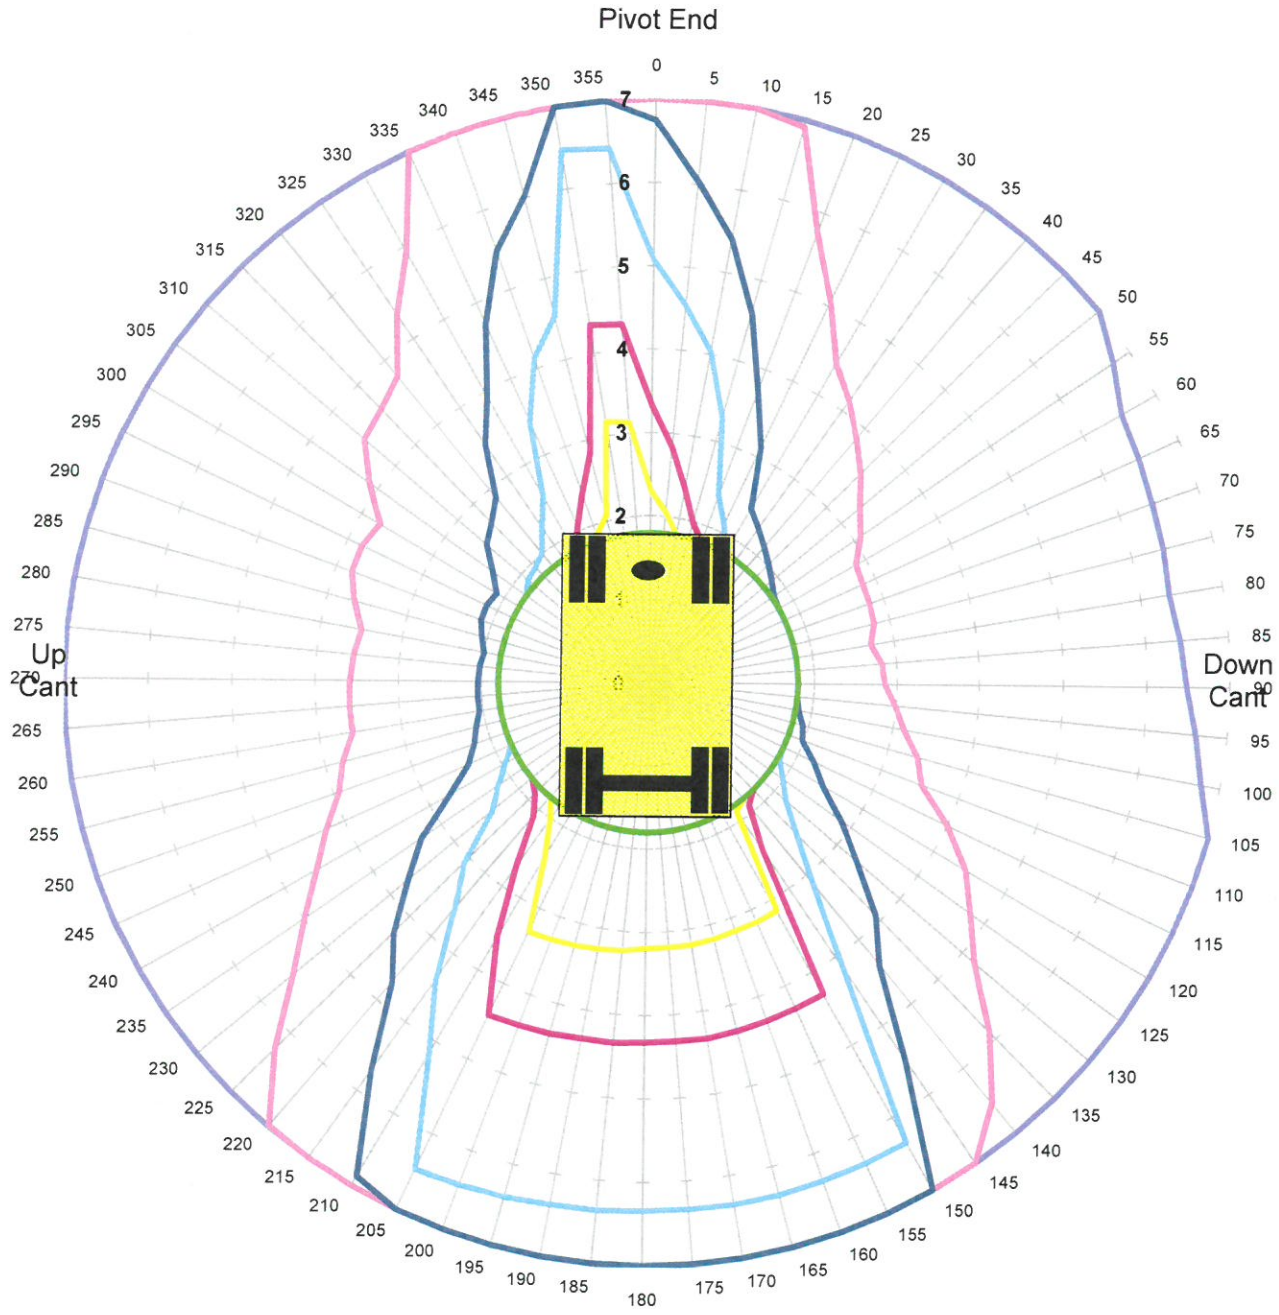

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Unlocked Rail Cant 50mm Tandem Lift

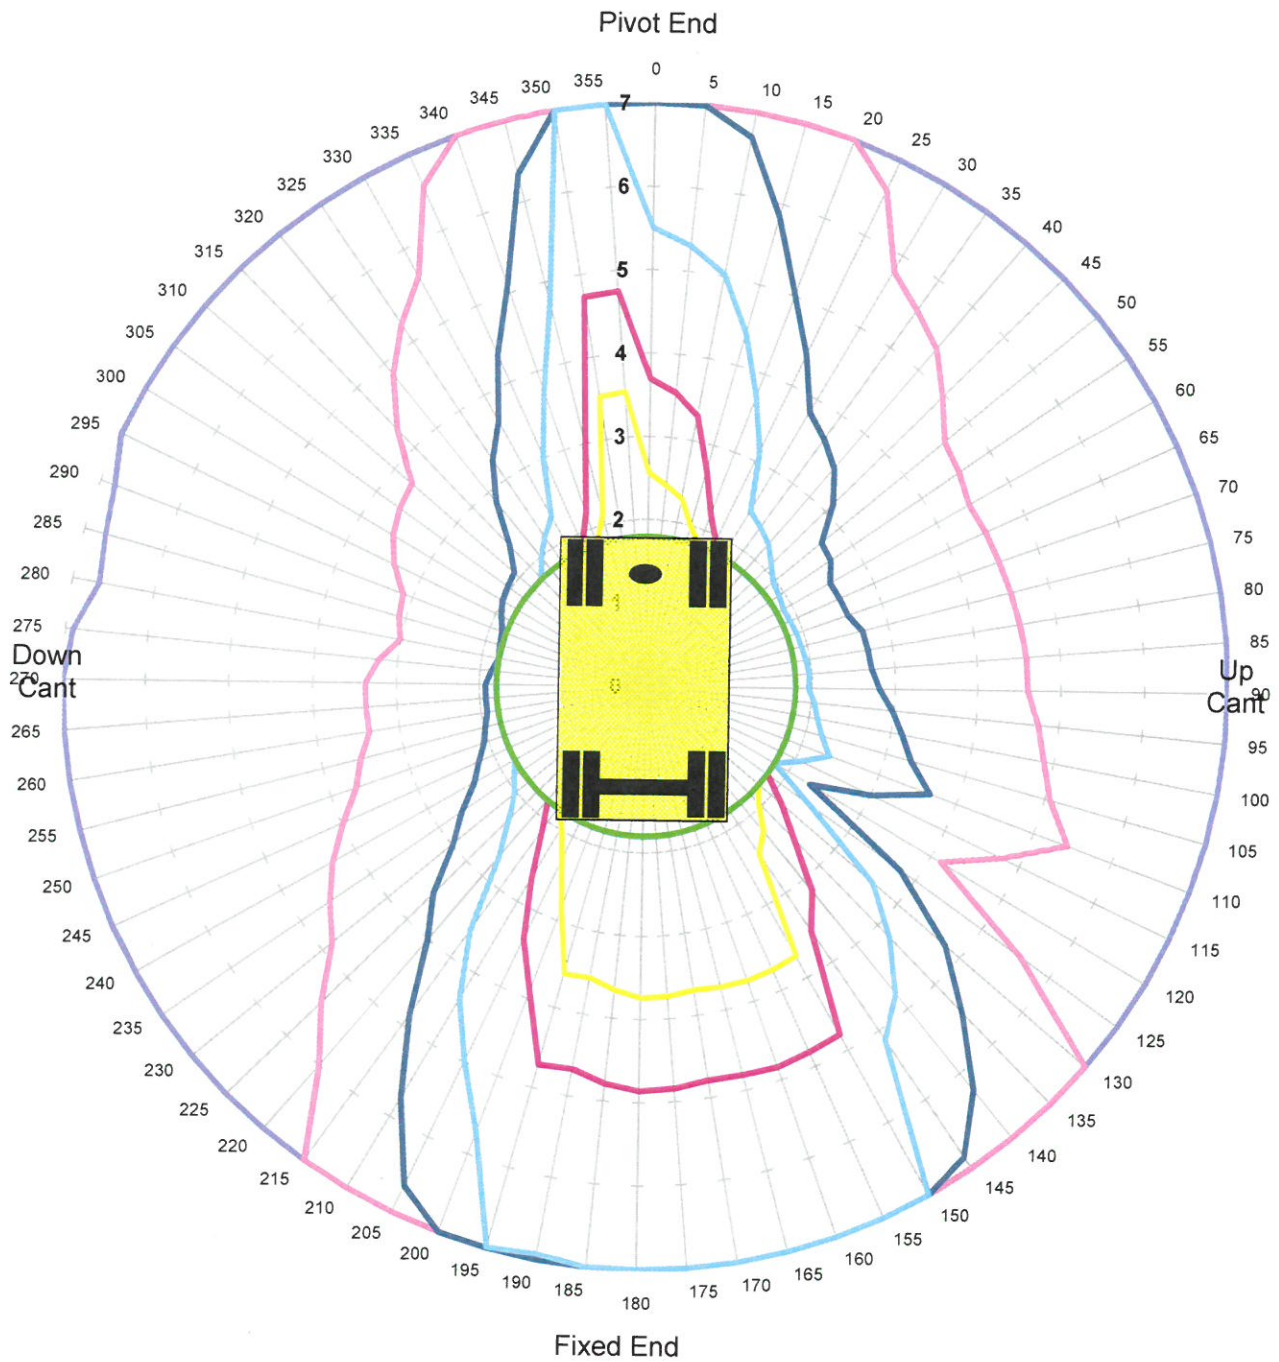

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Unlocked Rail Cant 150mm Tandem Lift

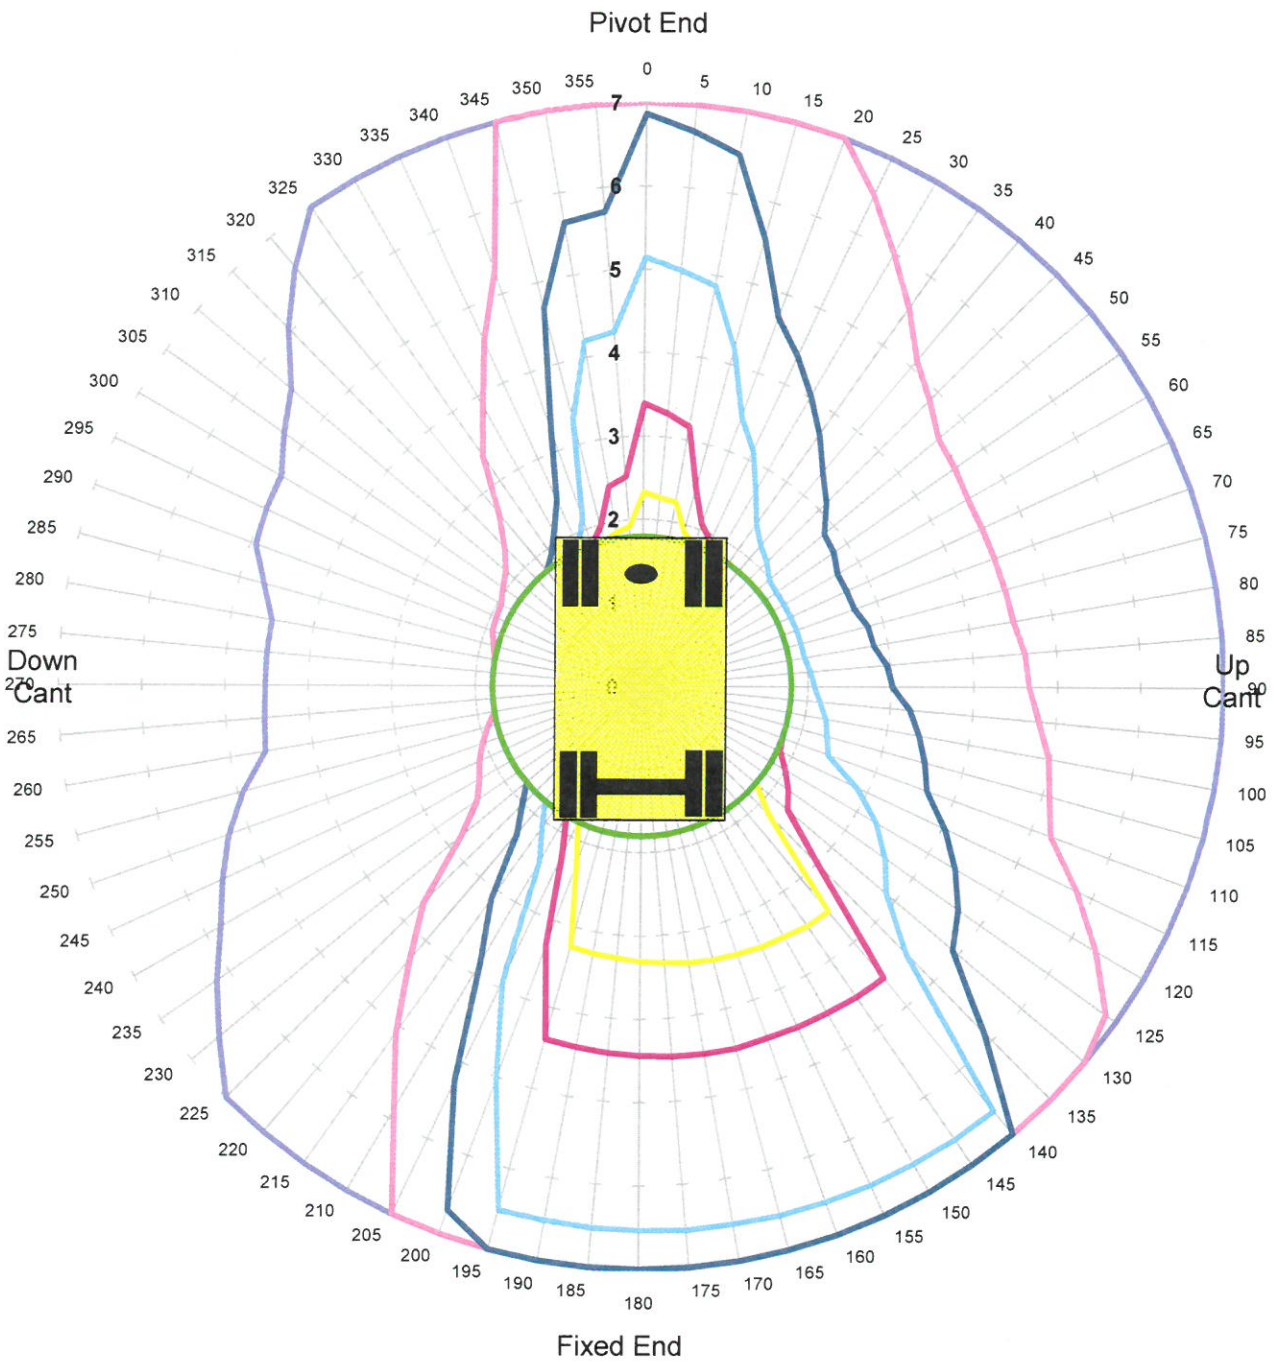

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Locked Rail Cant -150mm Tandem Lift

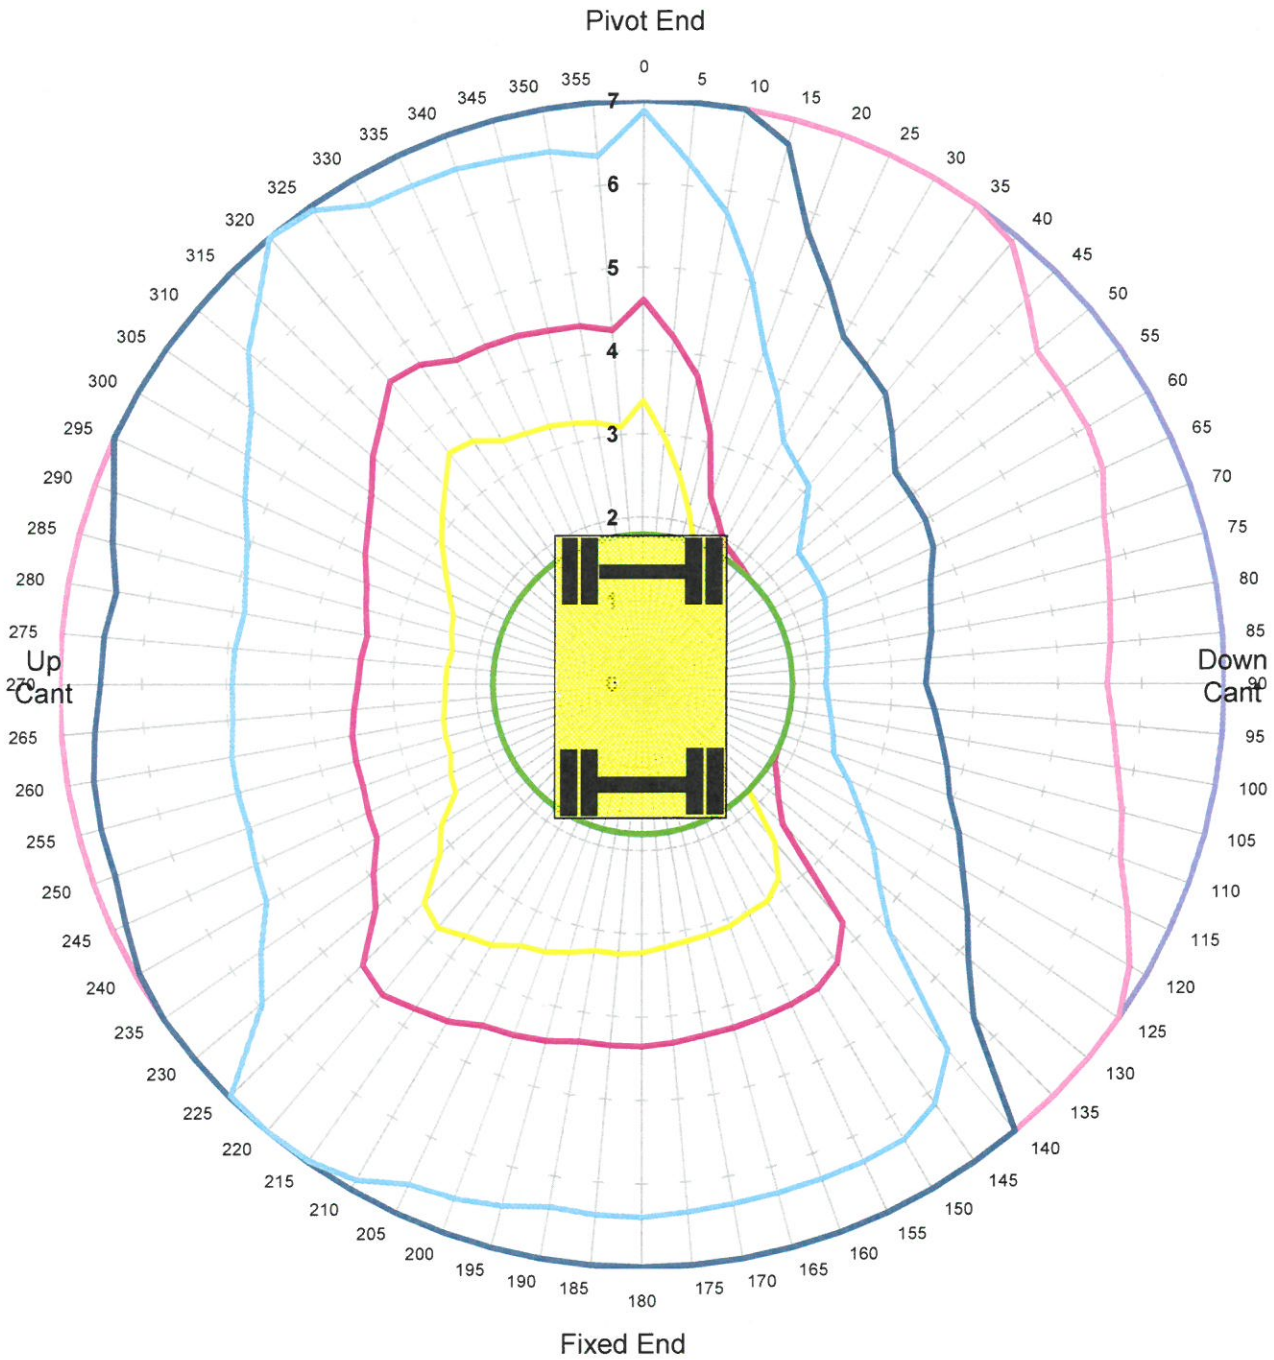

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Locked Rail Cant -50mm Tandem Lift

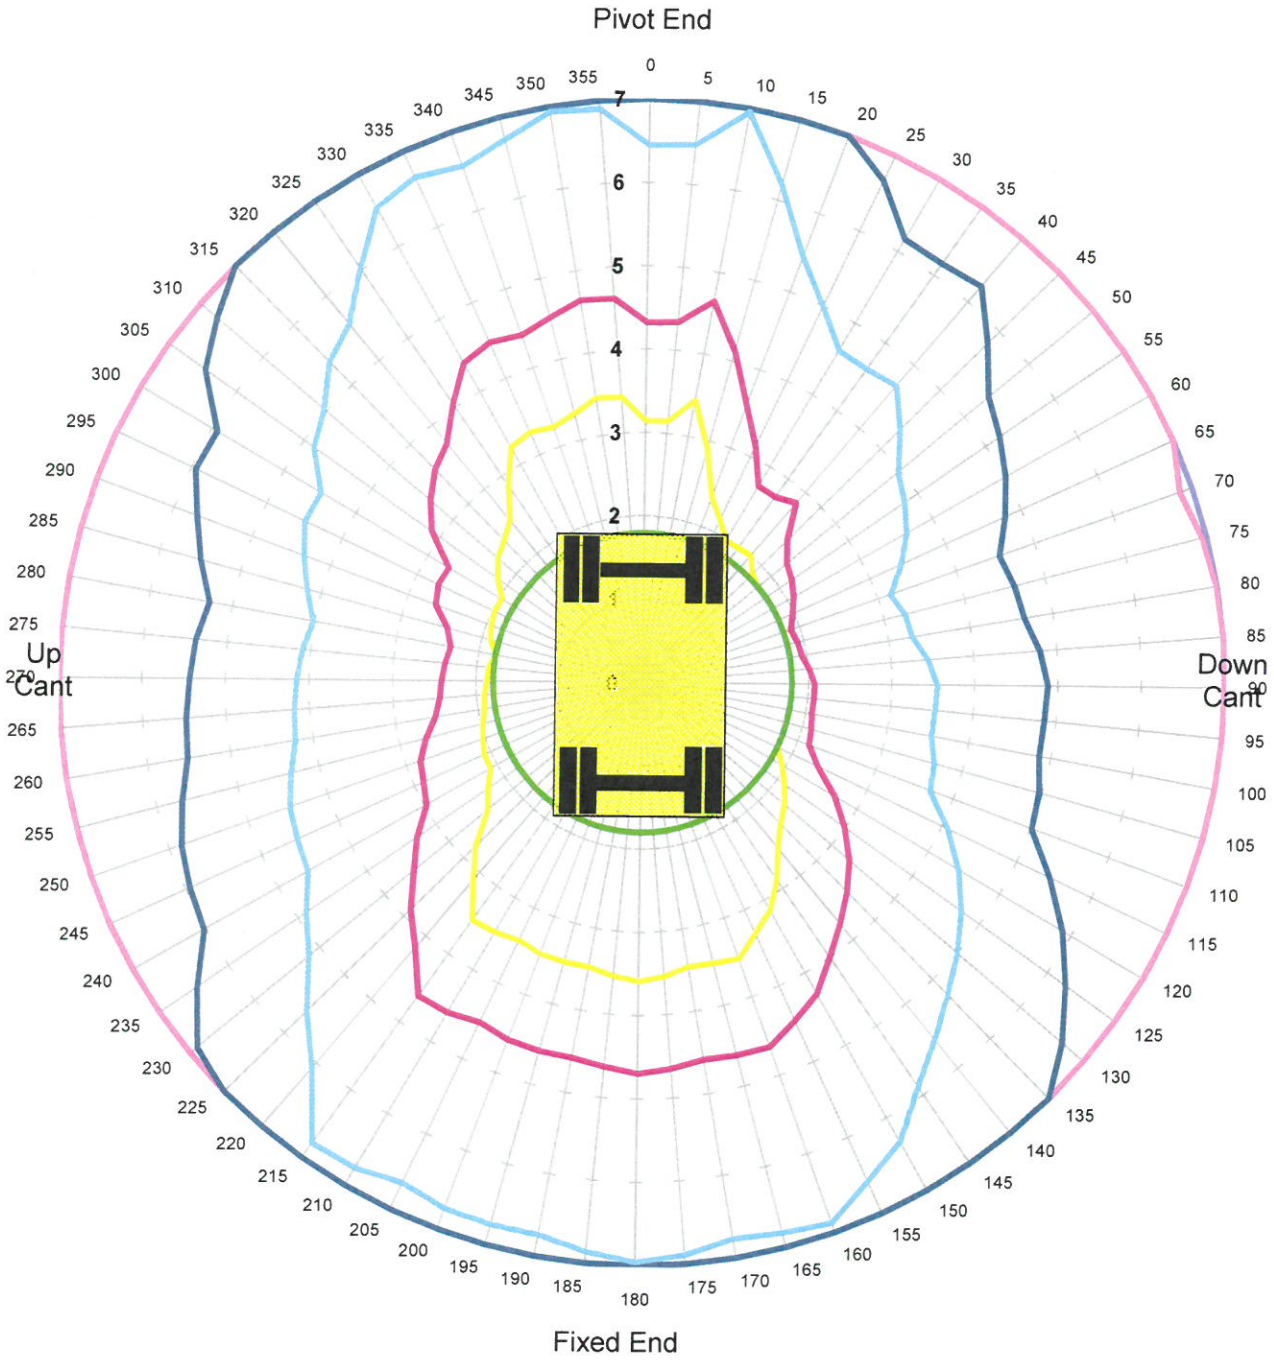

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Locked Rail Cant 50mm Tandem Lift

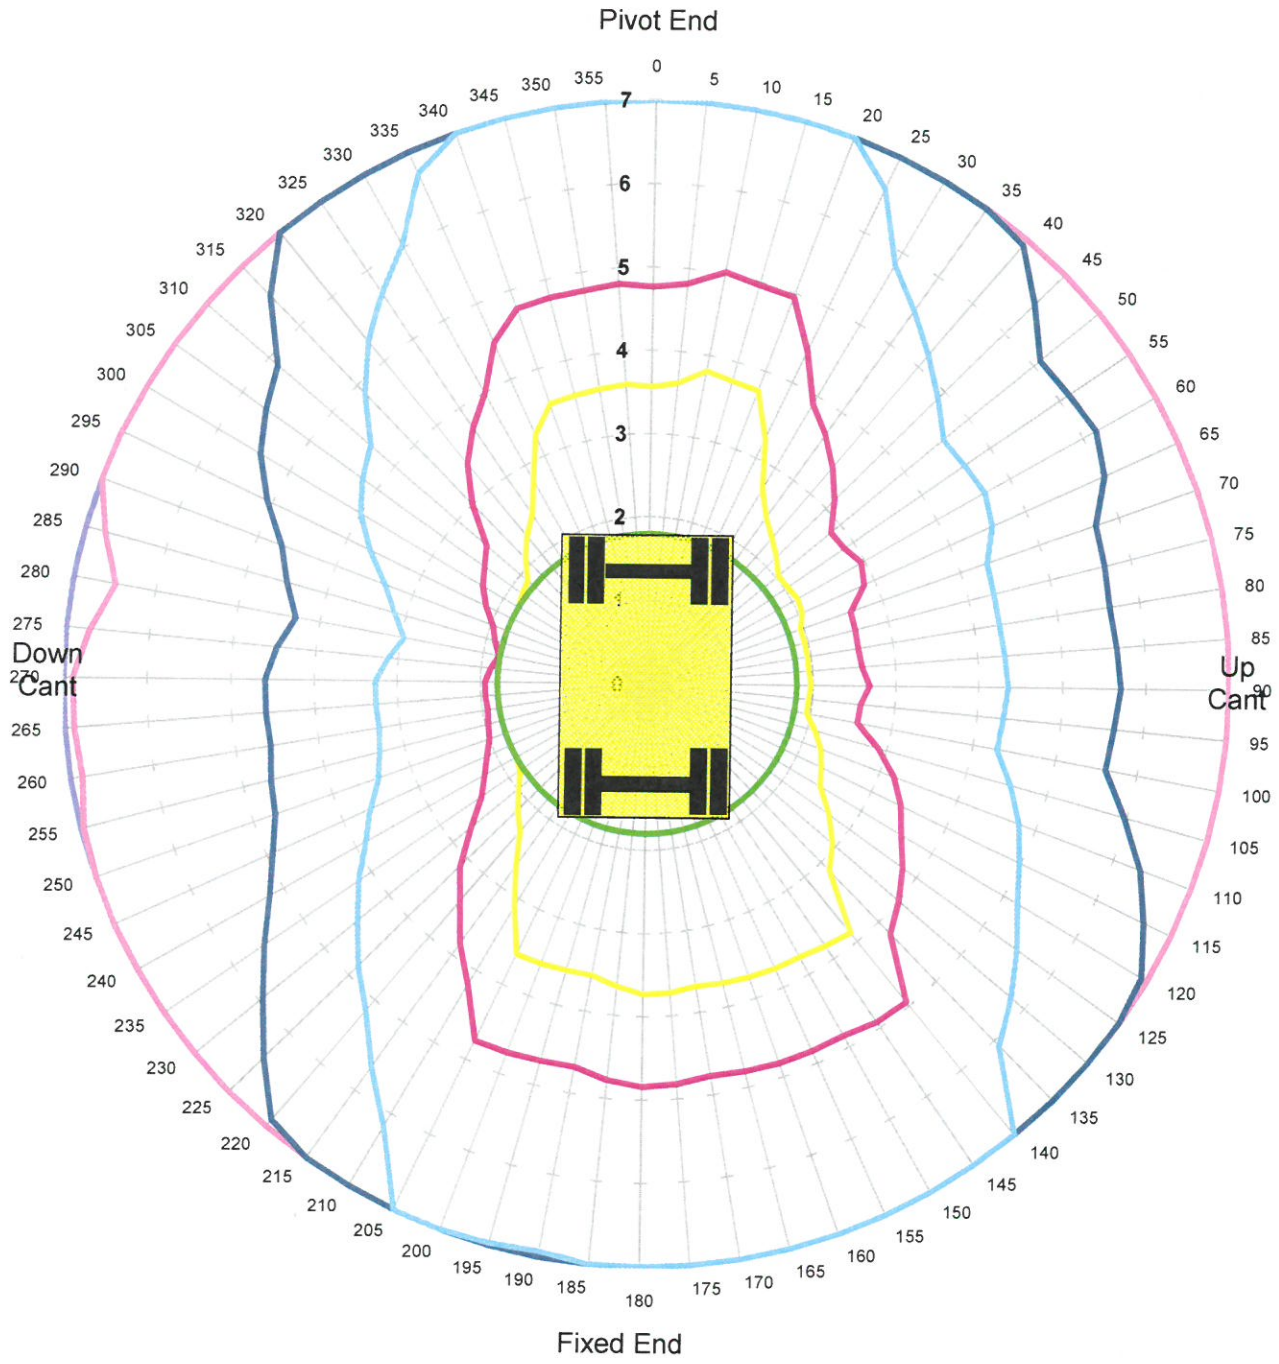

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift ALP
Locked Rail Cant 150mm Tandem Lift

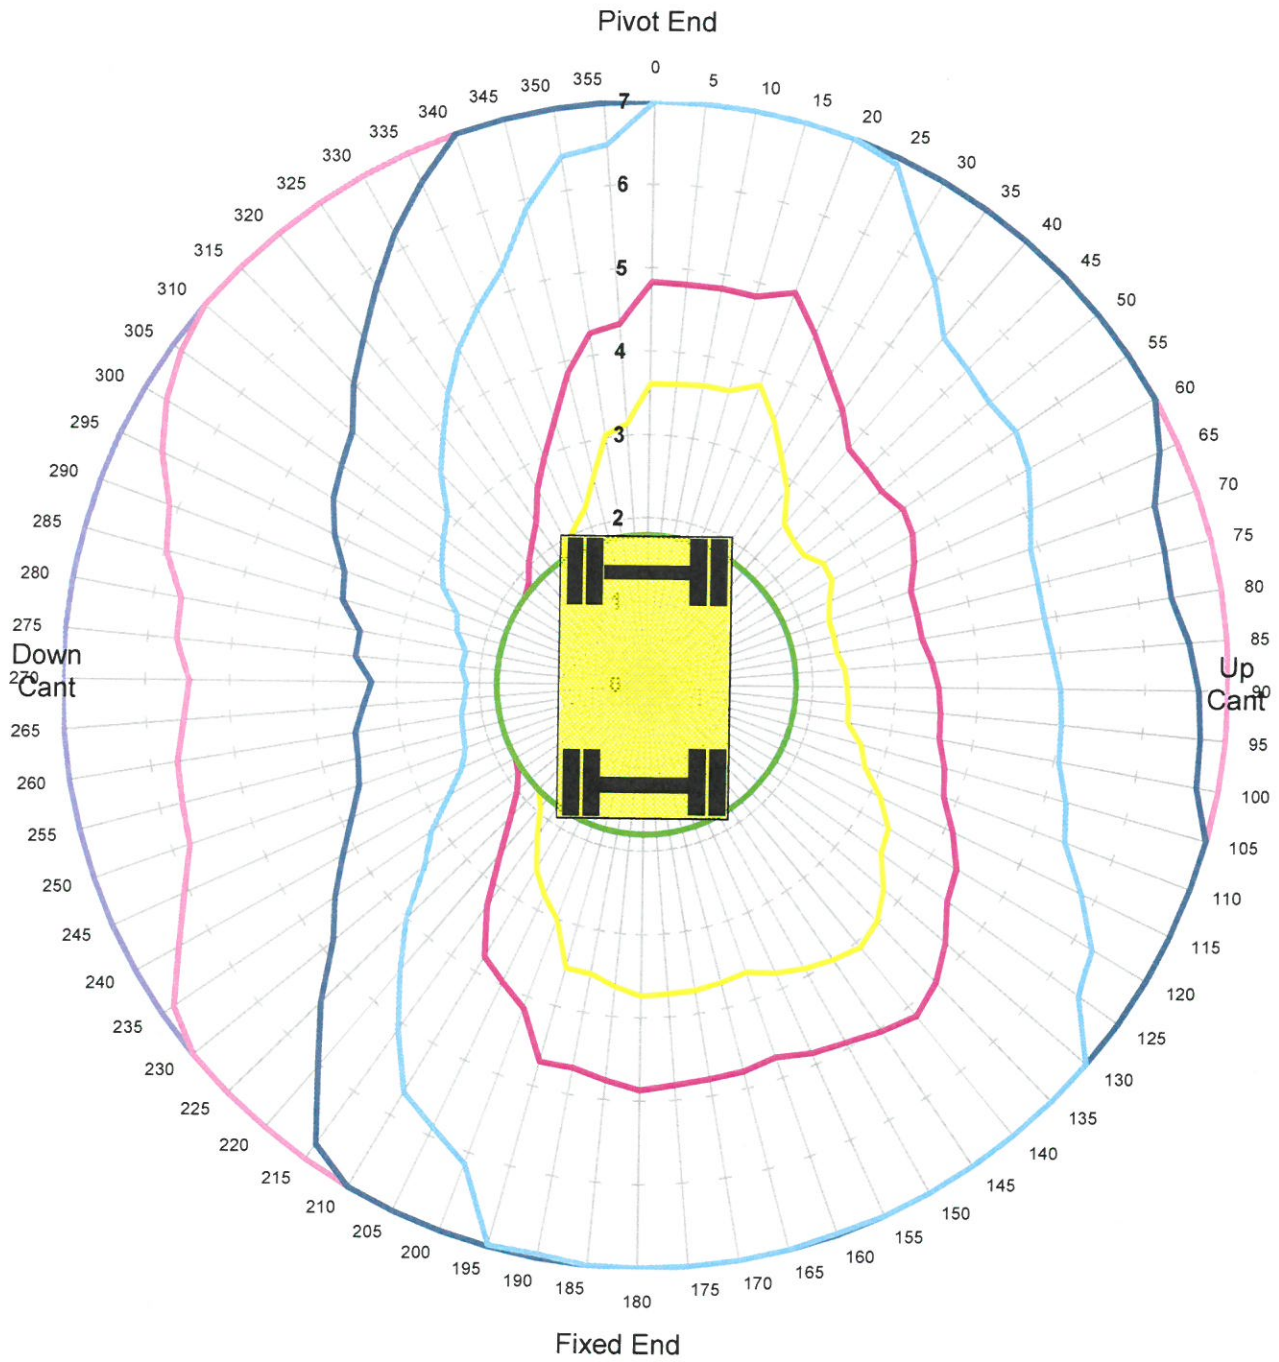

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -150mm

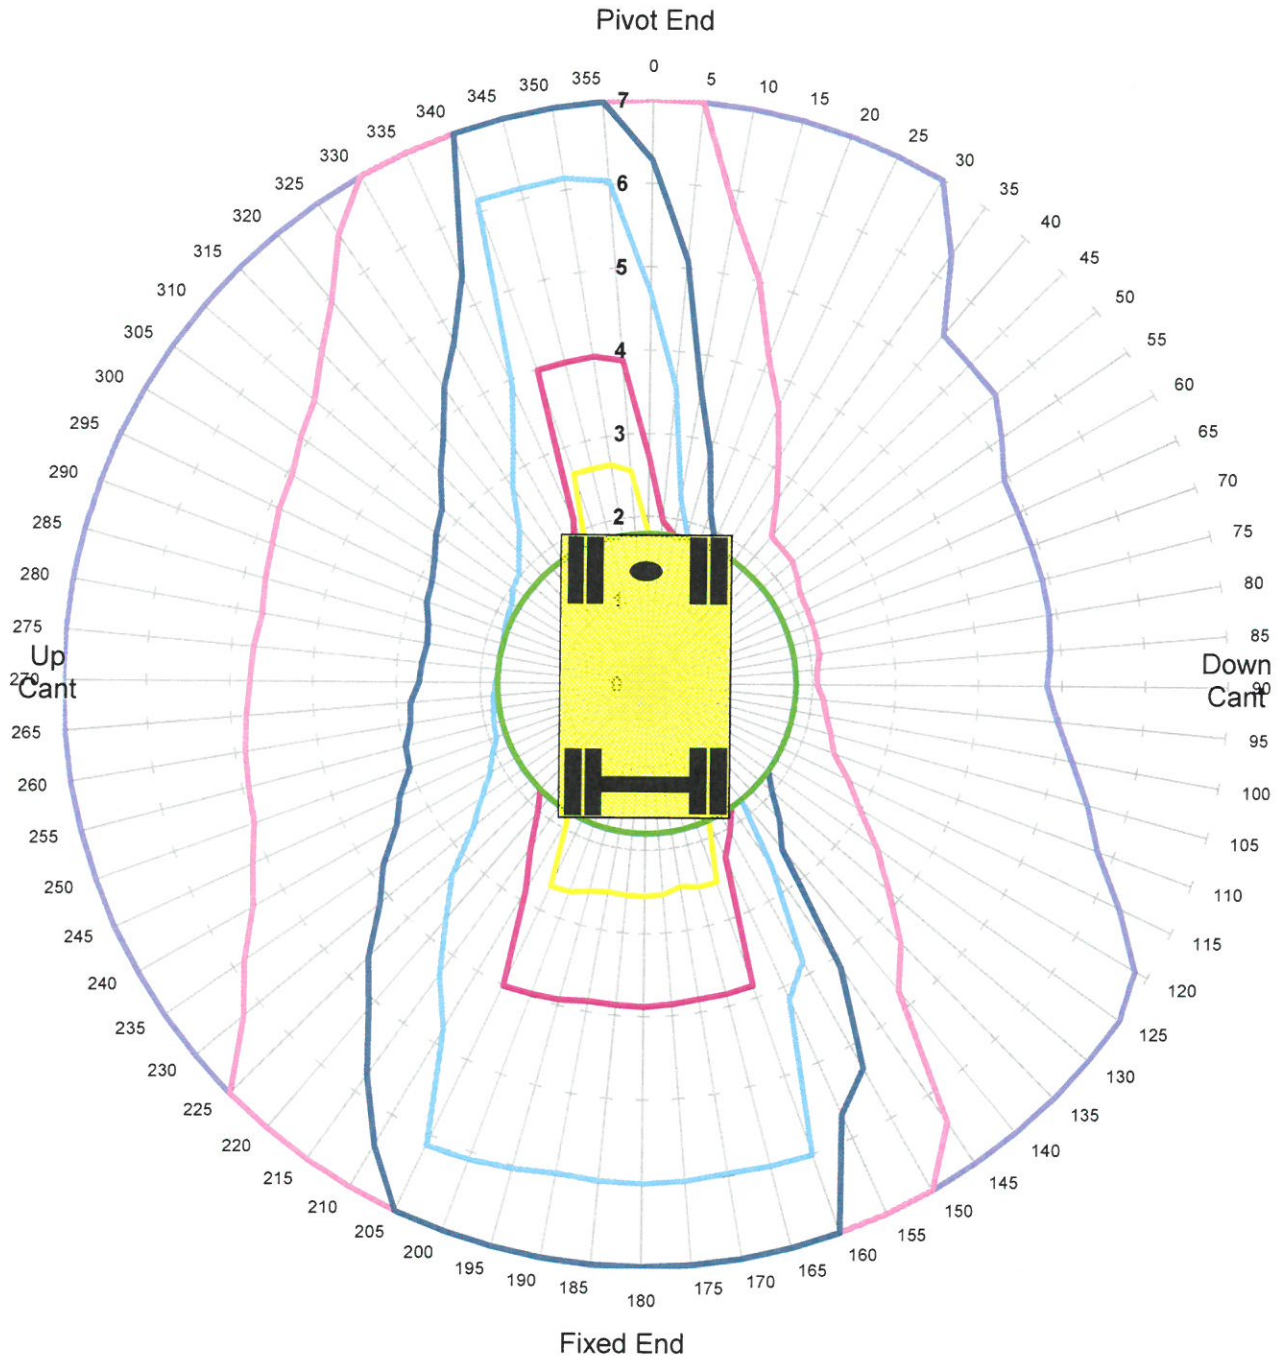

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -50mm

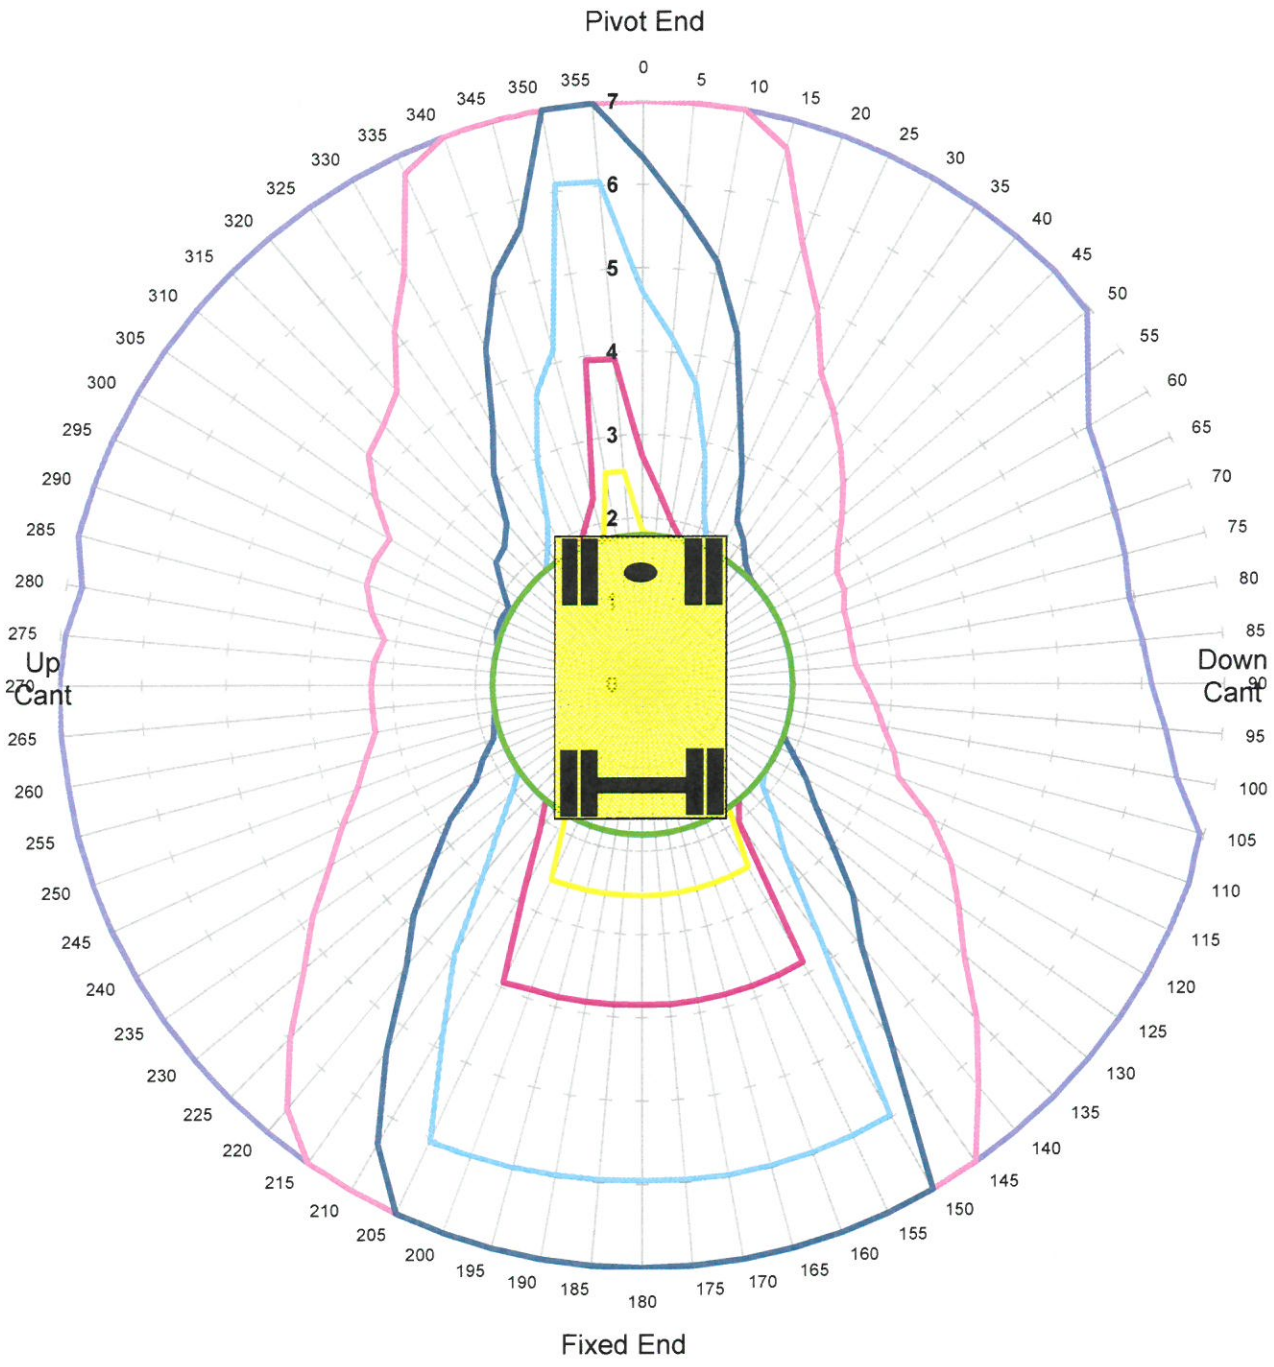

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 50mm

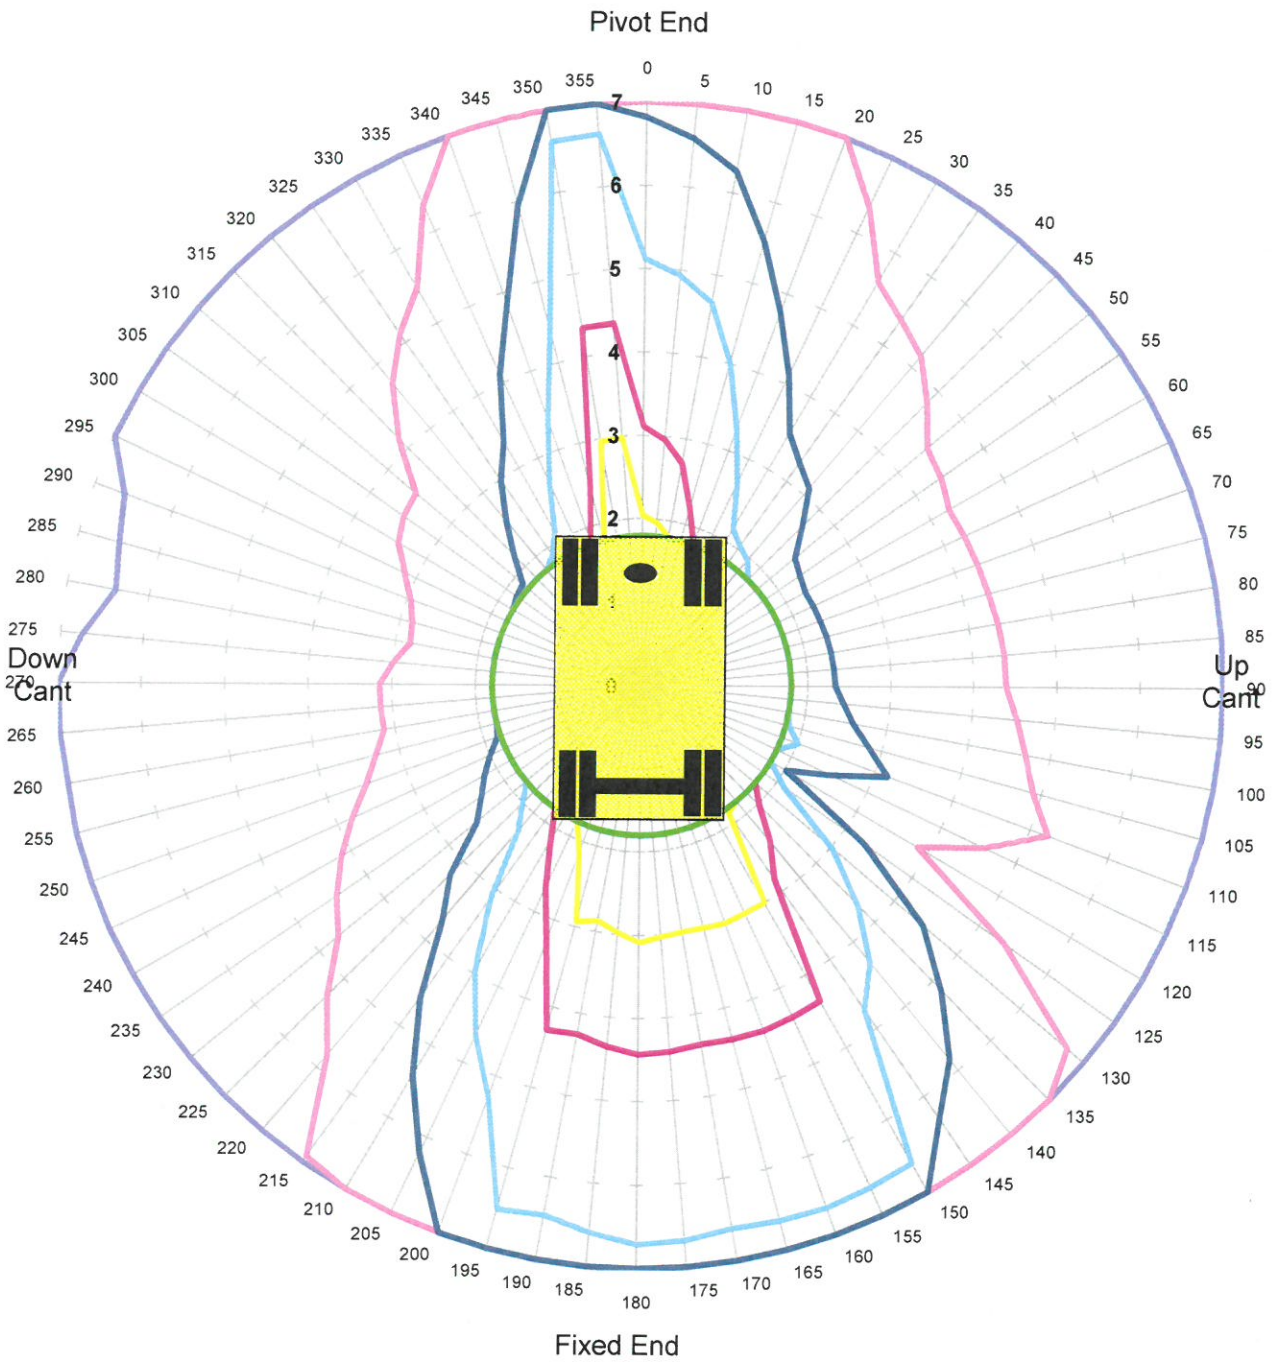

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 150mm

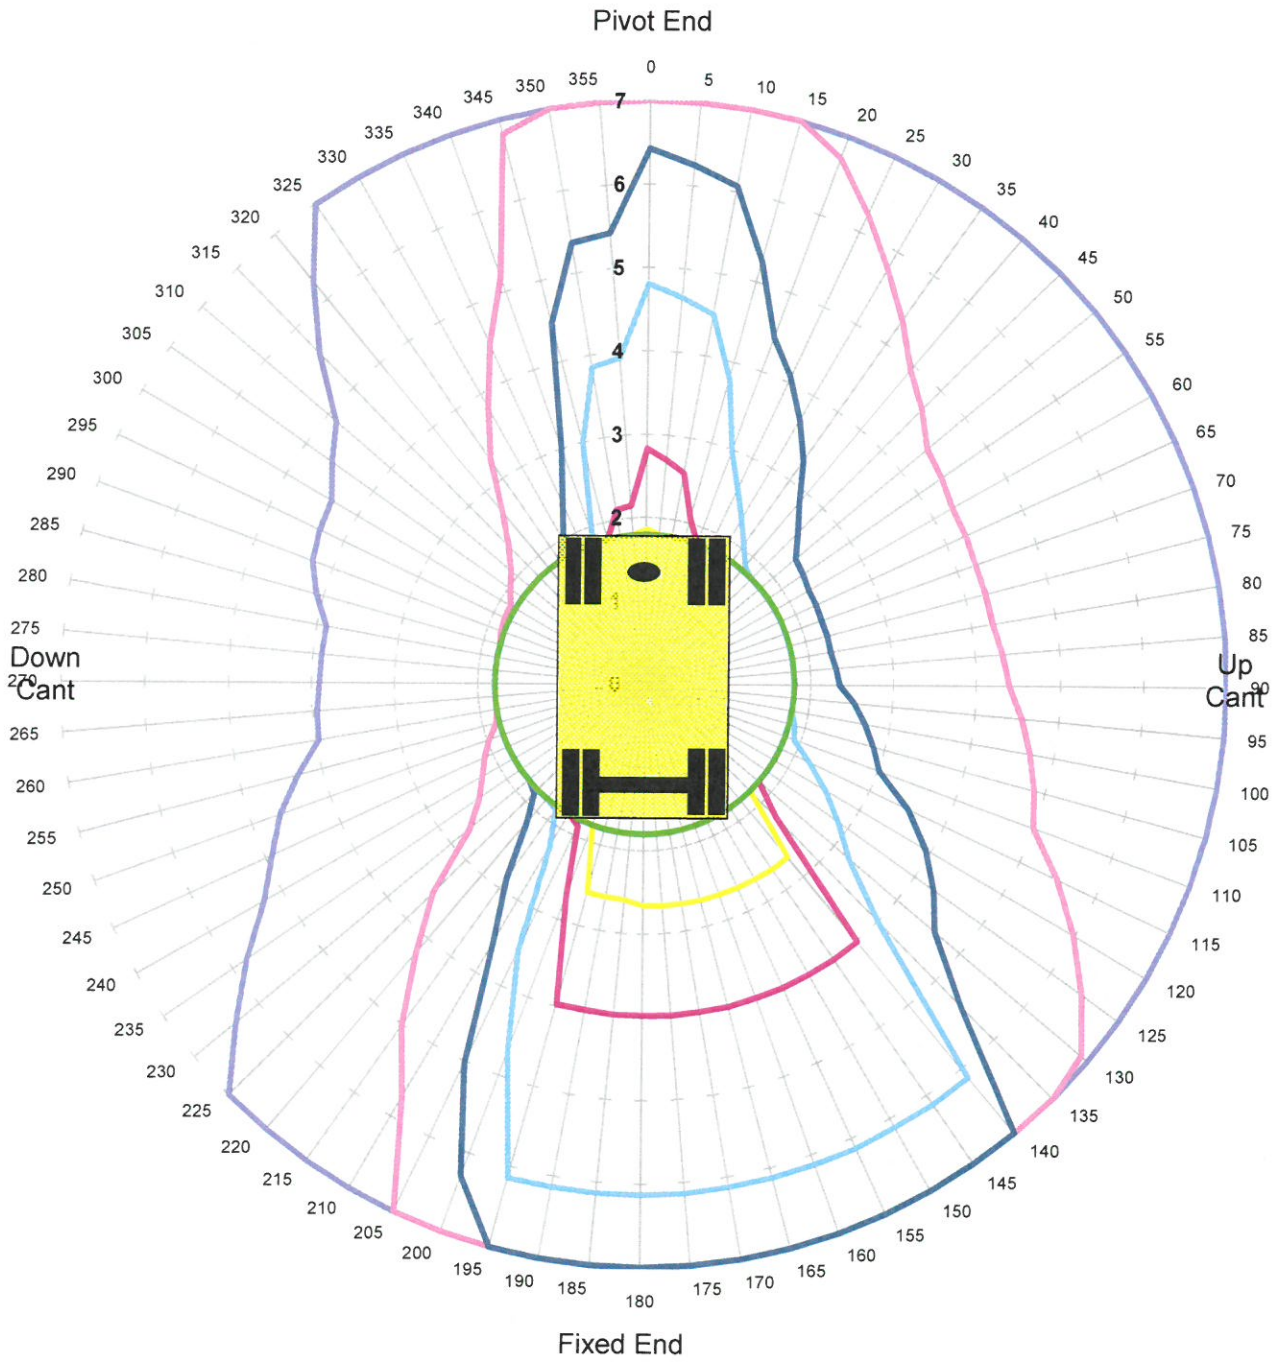

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	67.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -150mm

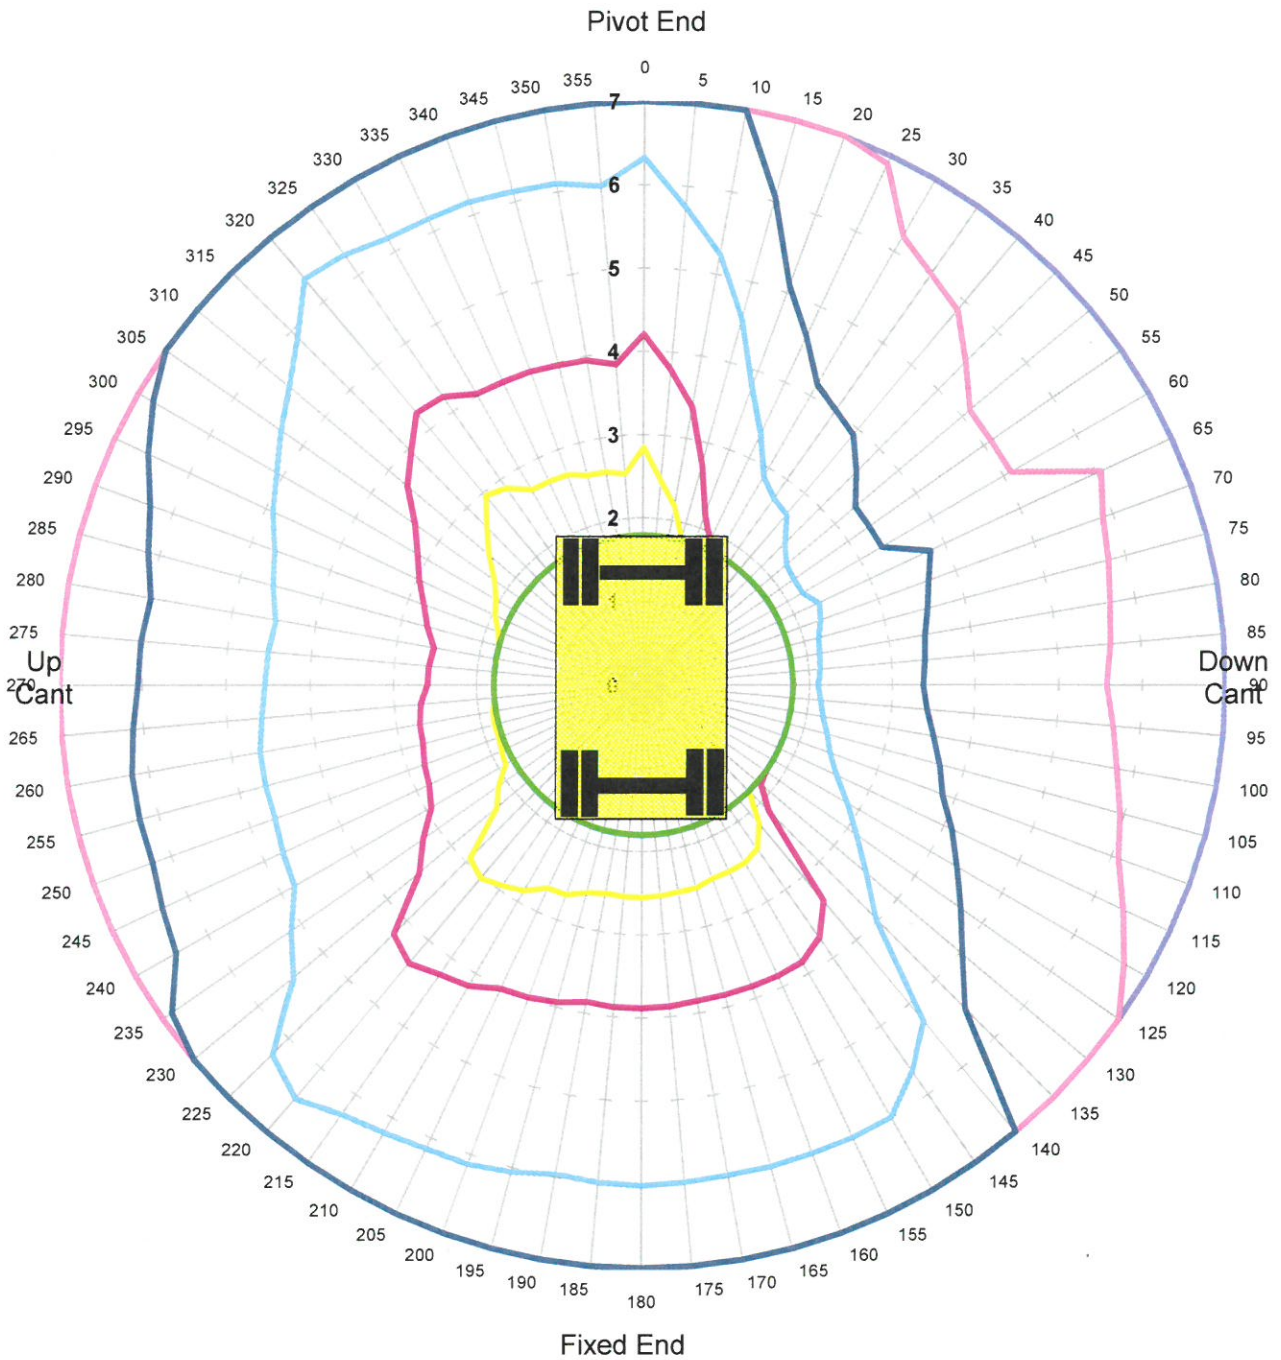

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -50mm

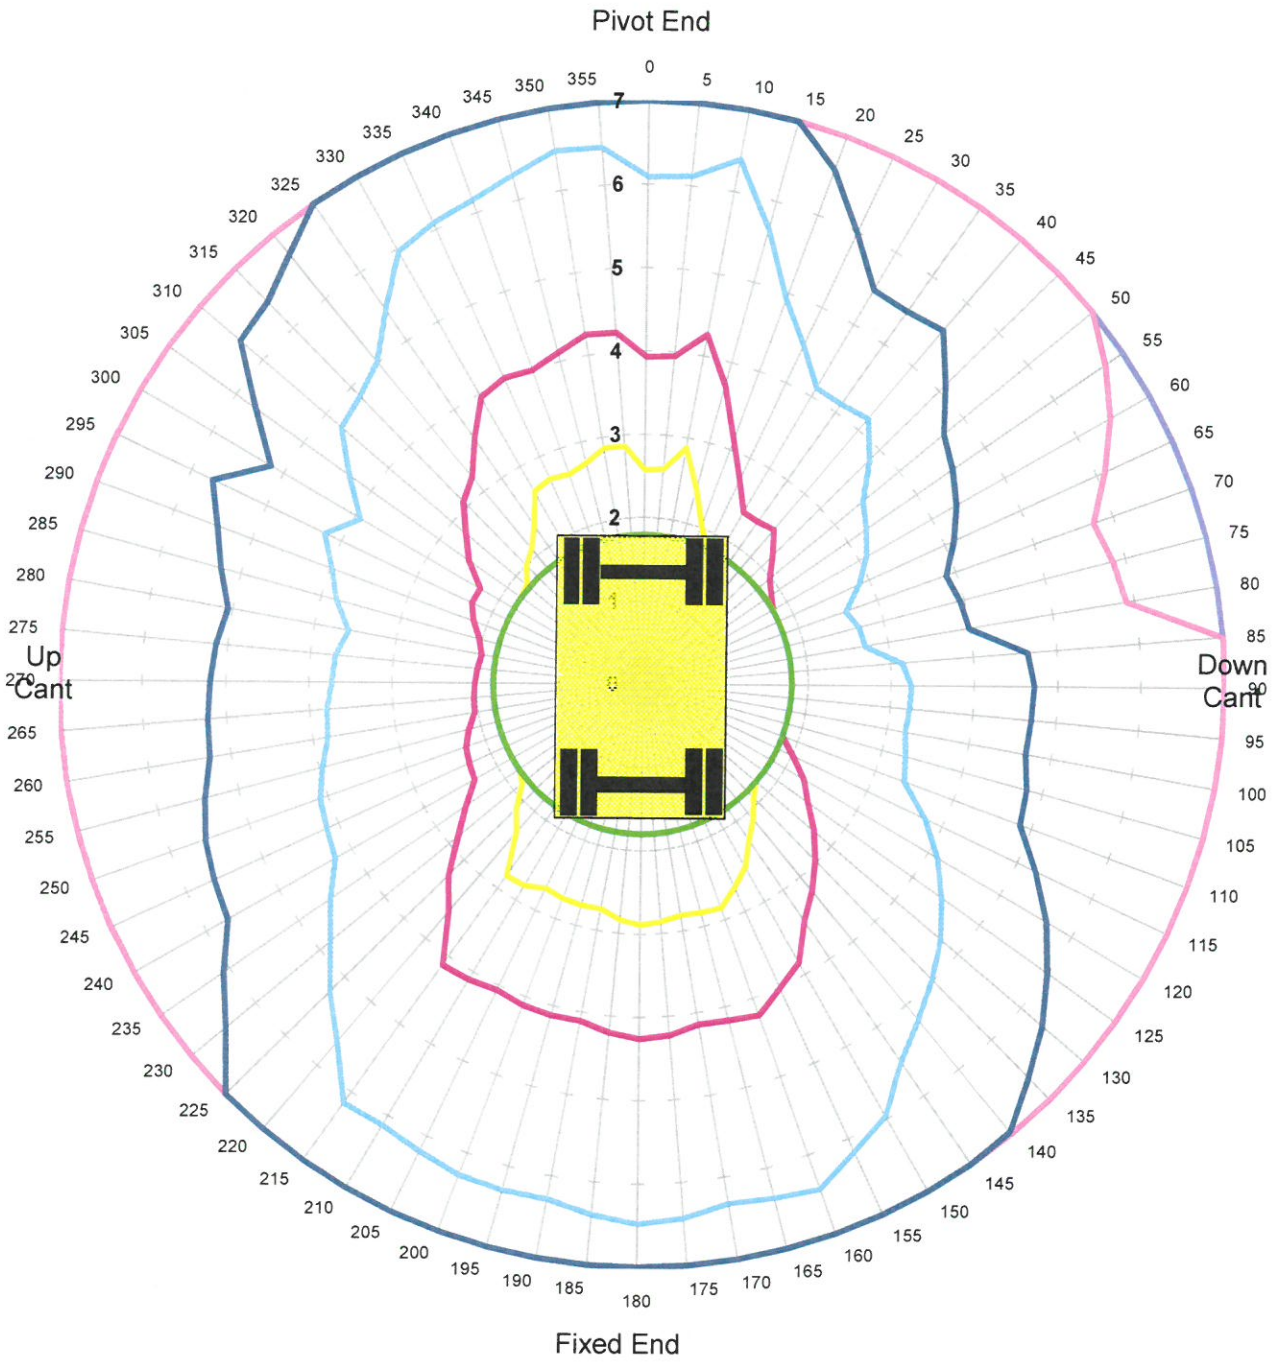

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 50mm

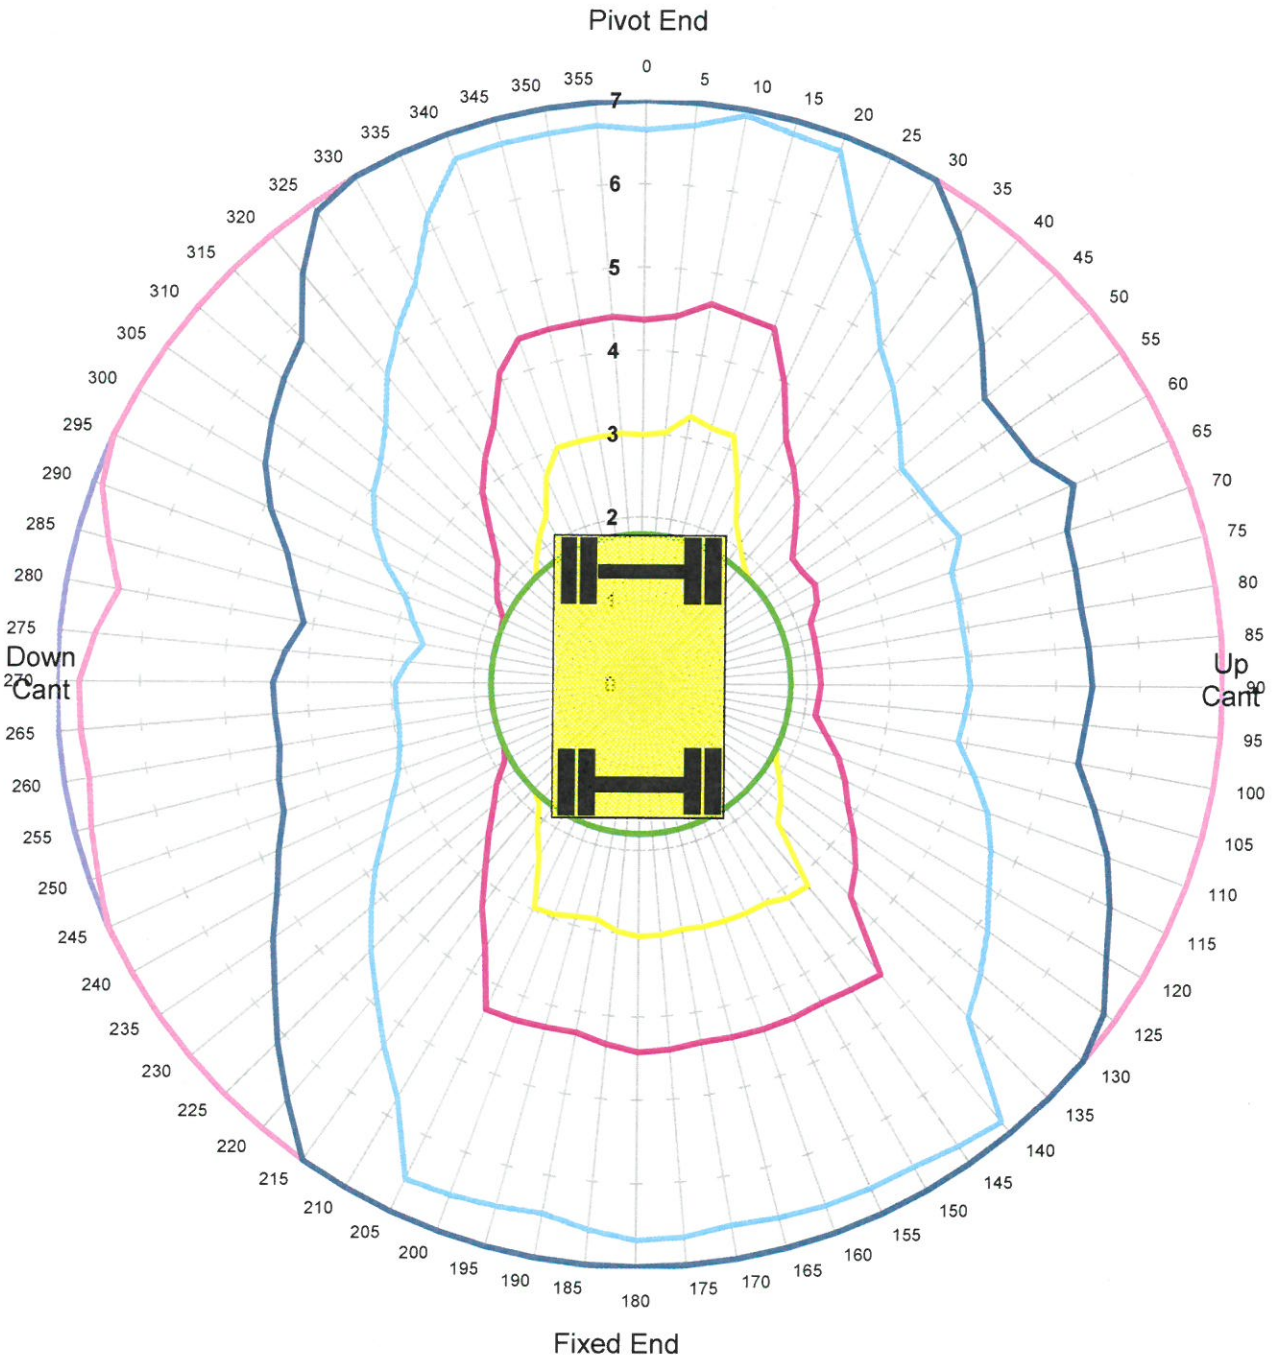

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 150mm

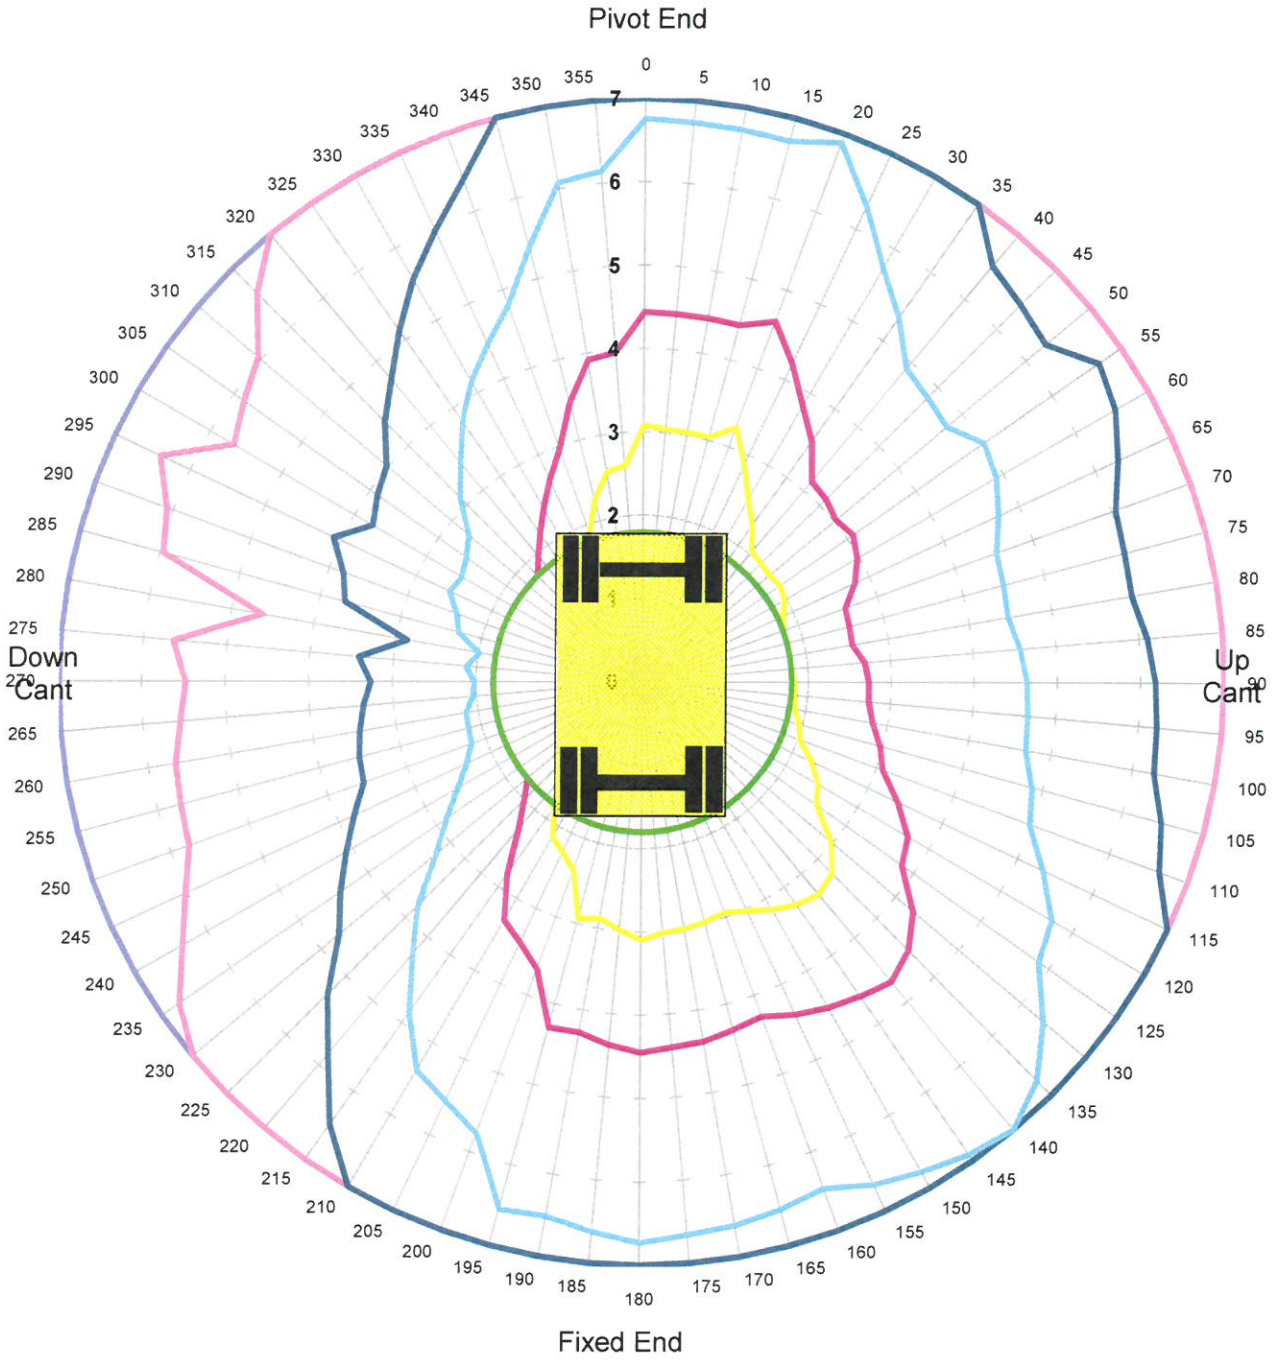

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	90.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -150mm Tandem Lift

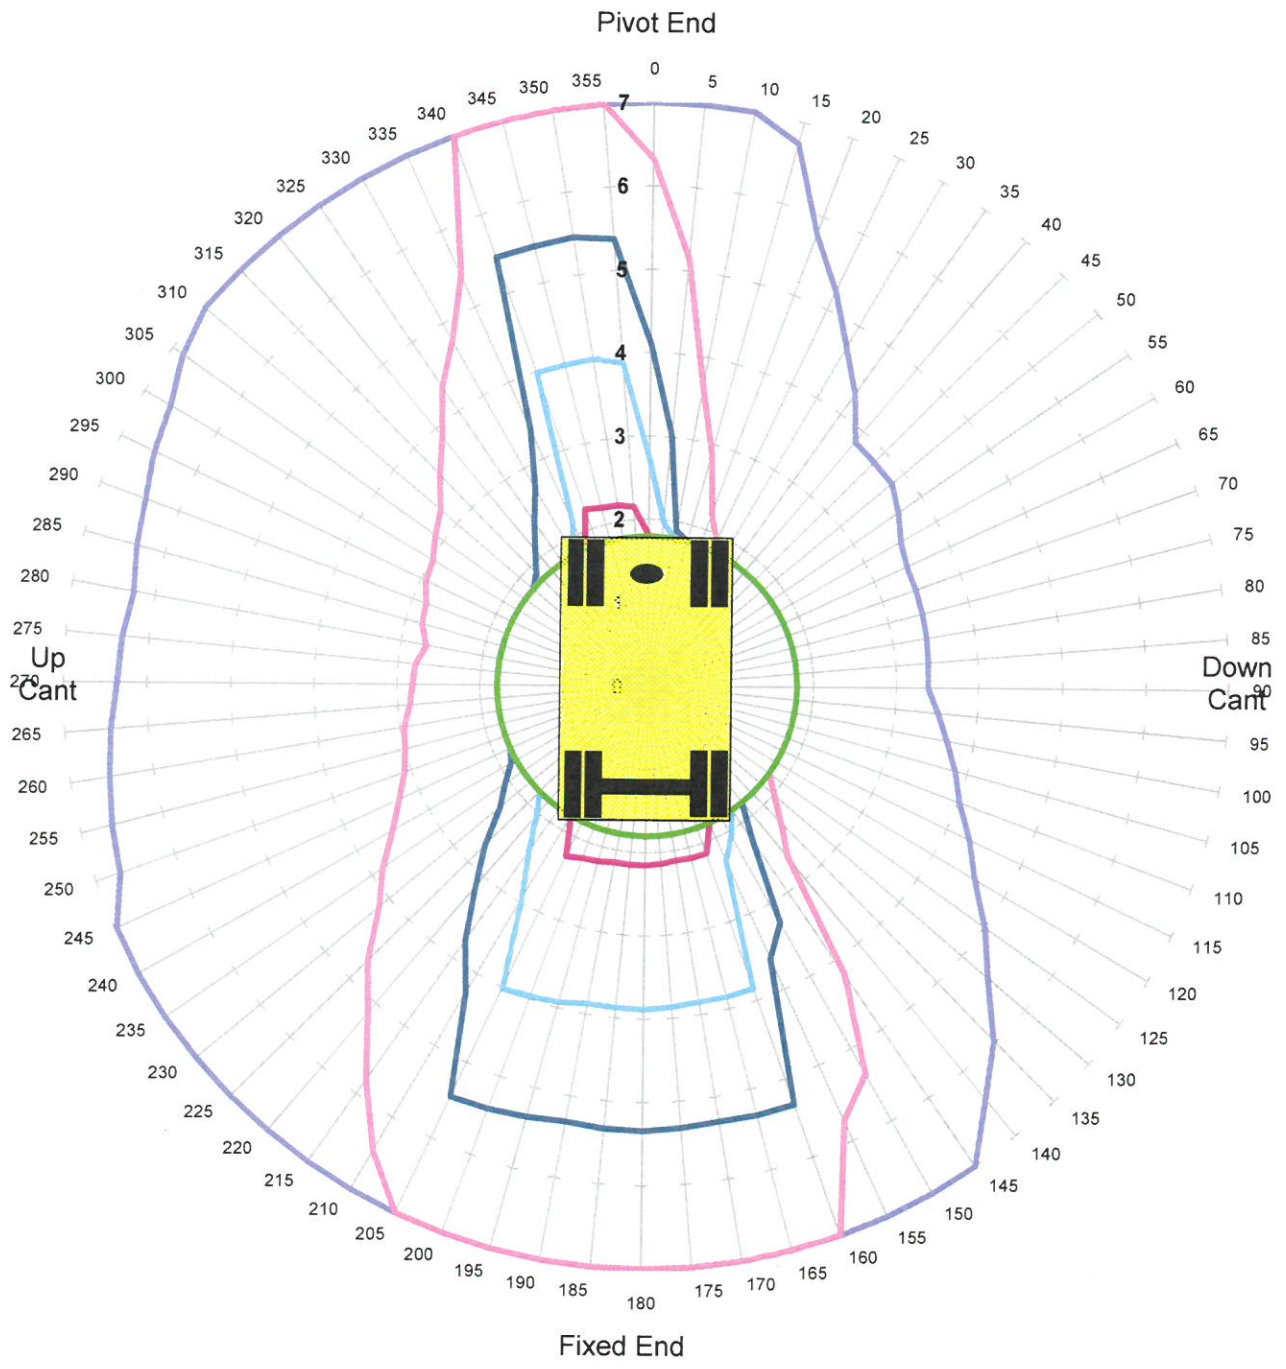

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -50mm Tandem Lift

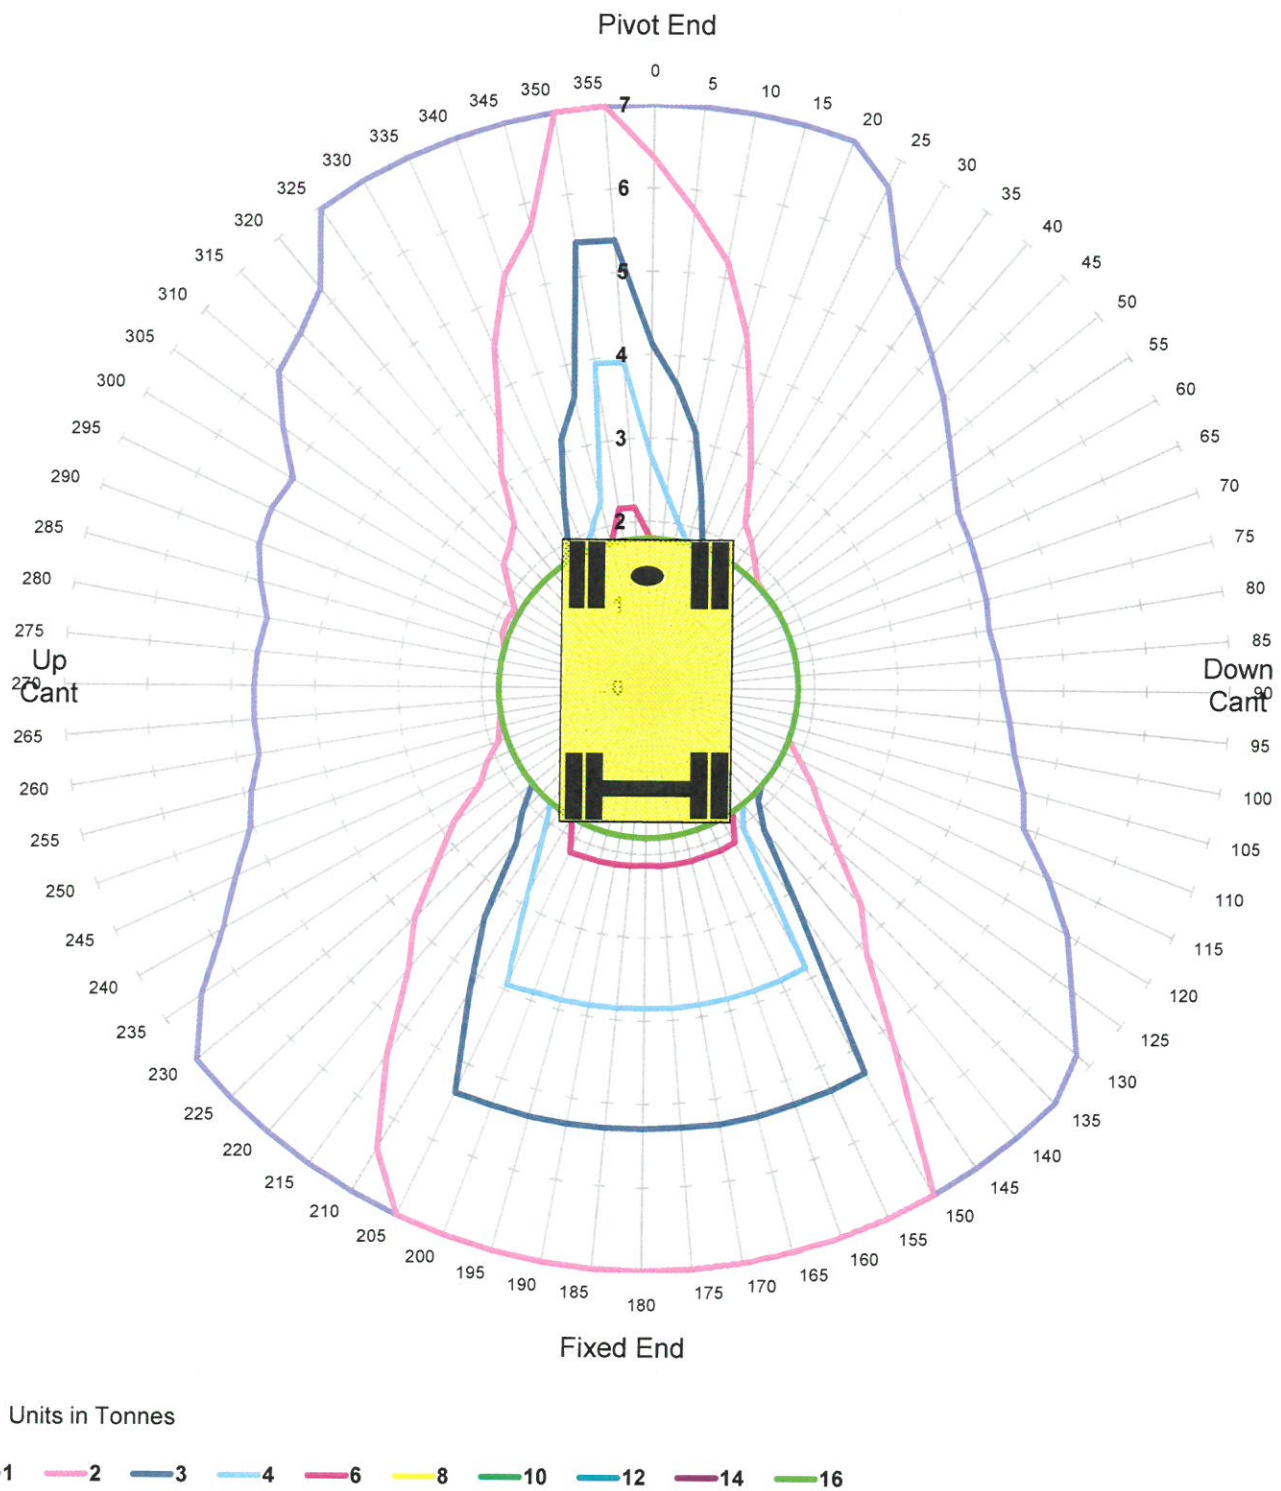

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 50mm Tandem Lift

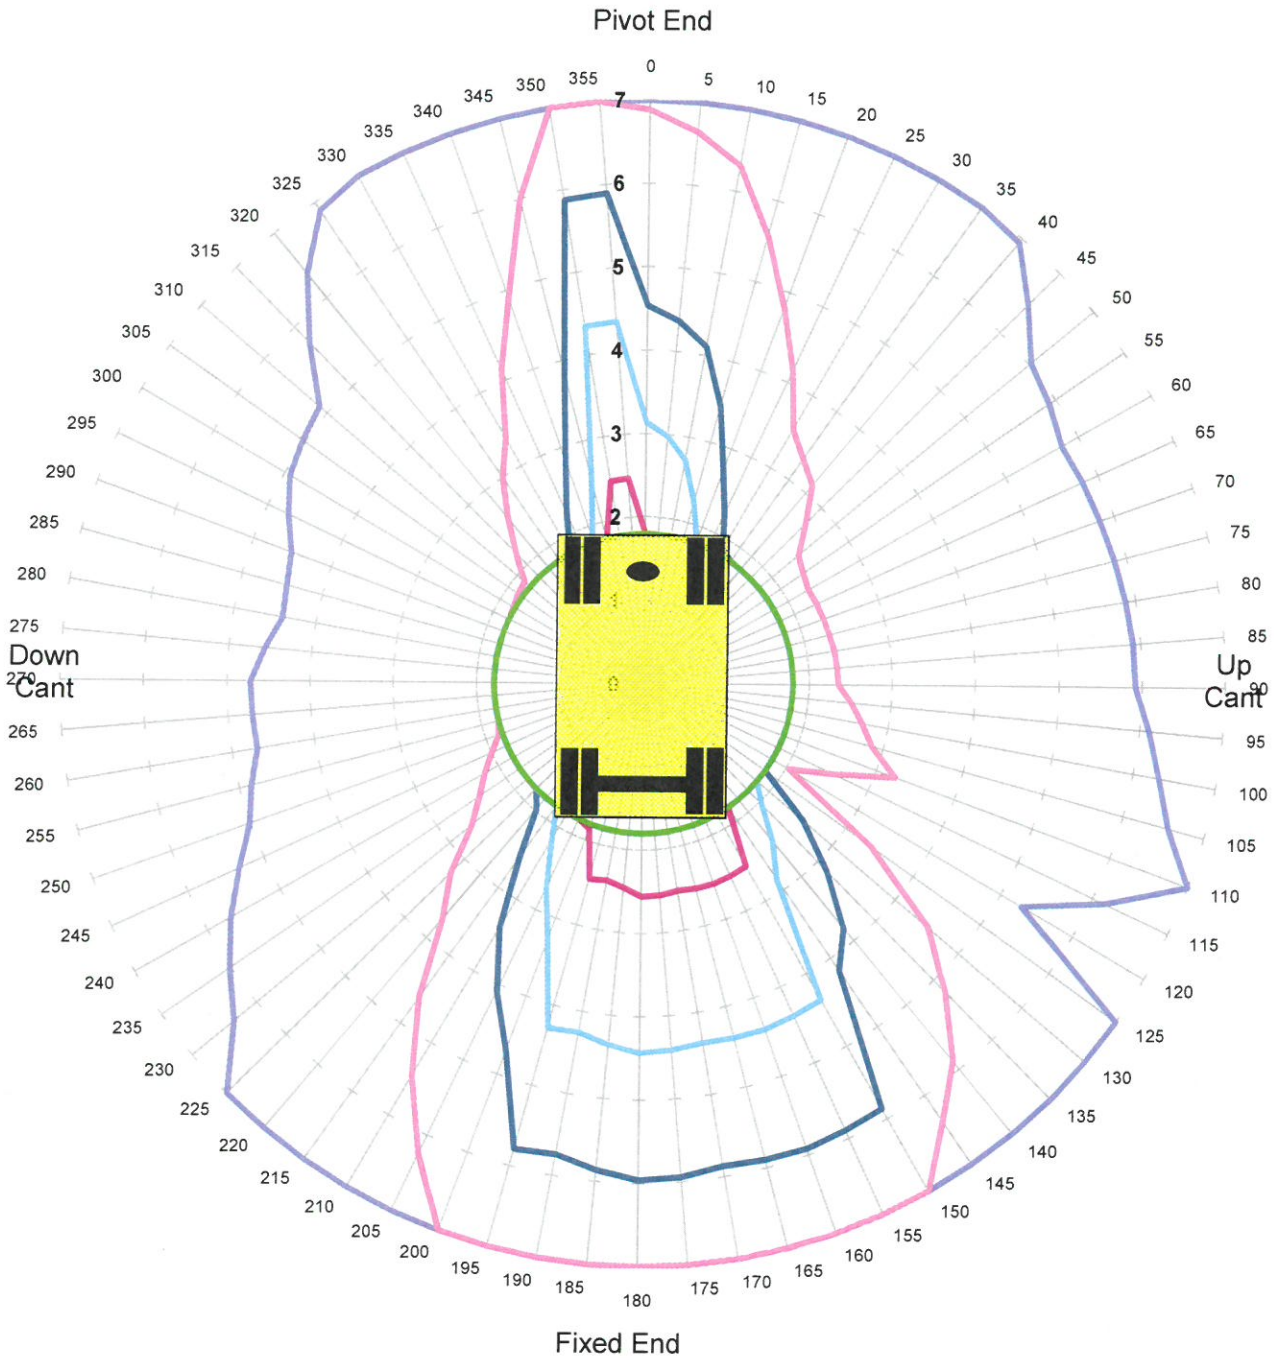

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 150mm Tandem Lift

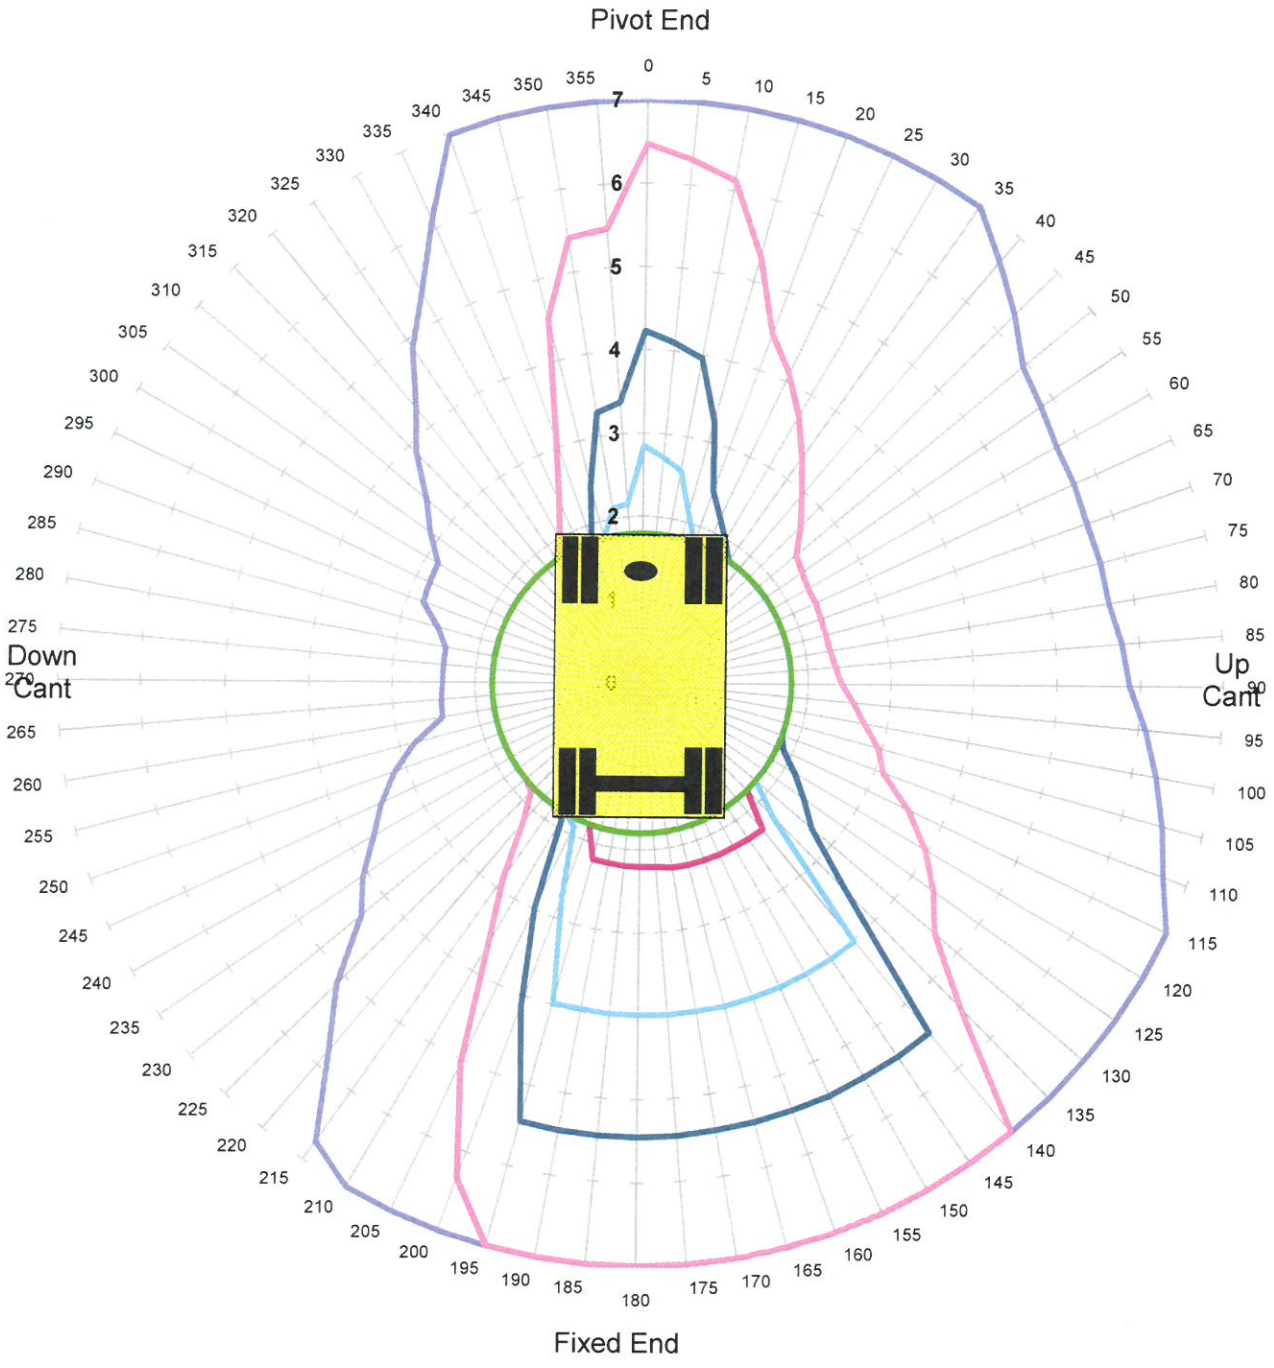

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	45.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -150mm Tandem Lift

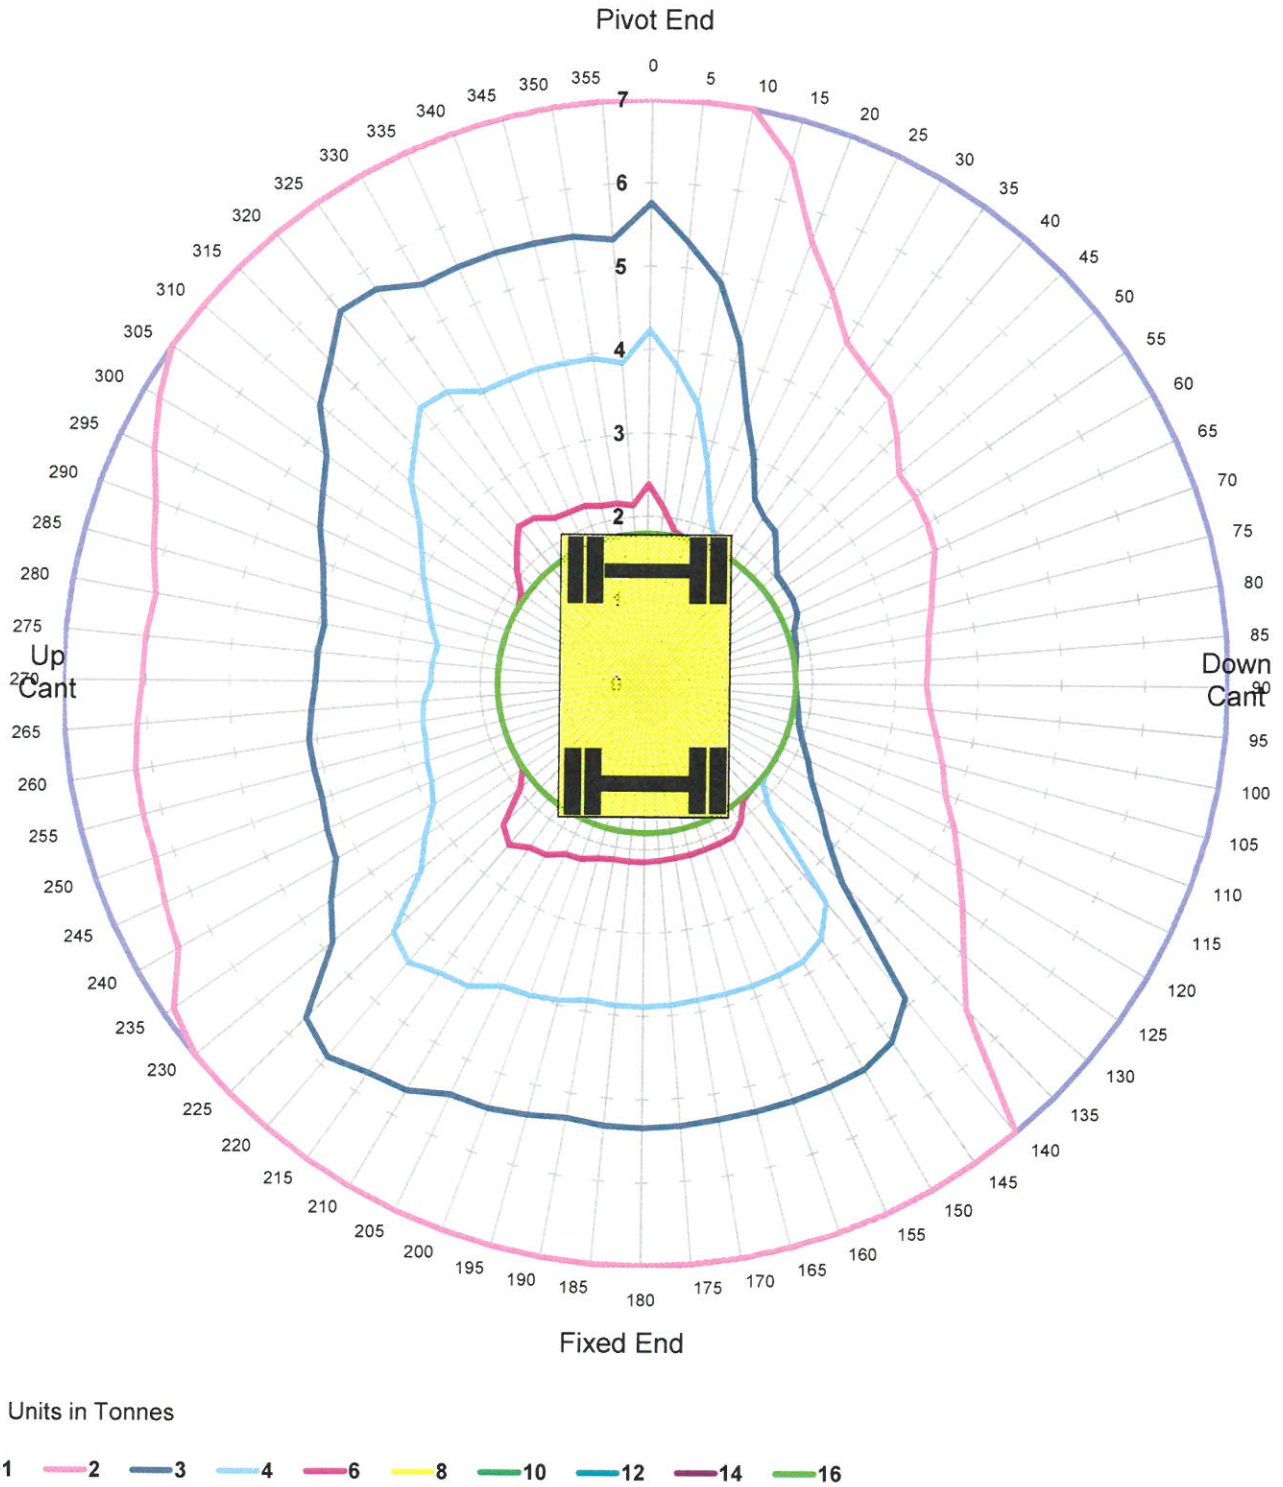

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -50mm Tandem Lift

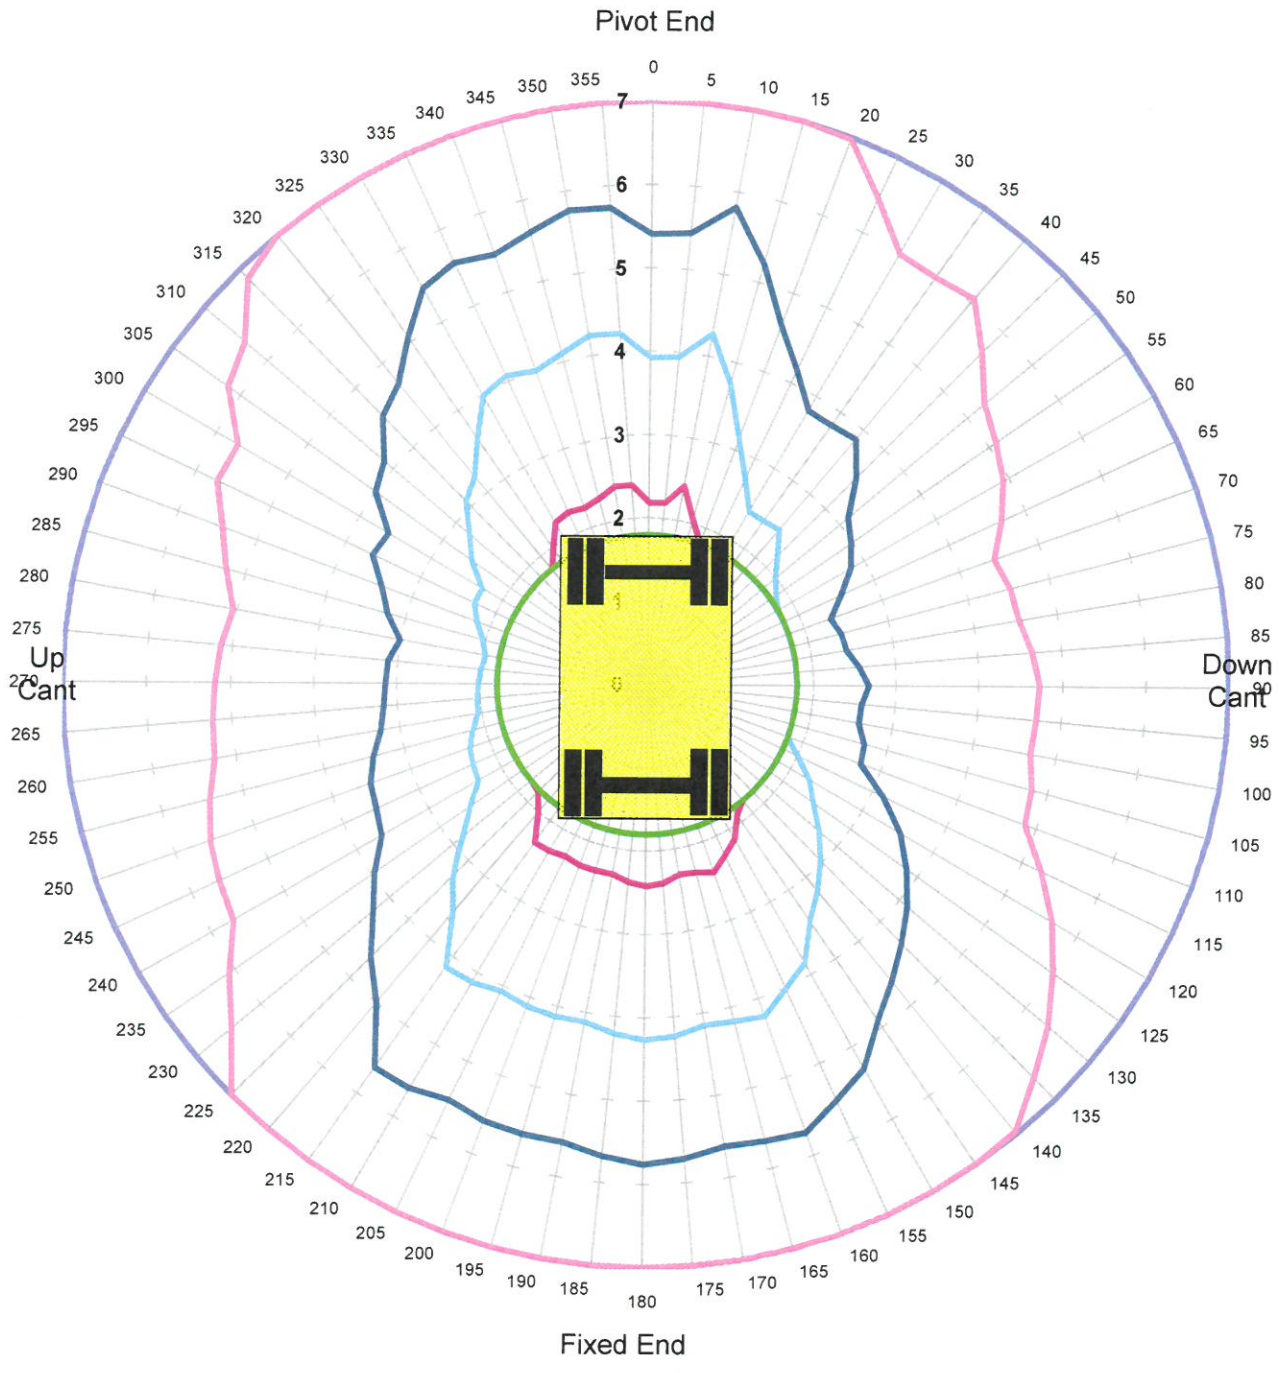

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 50mm Tandem Lift

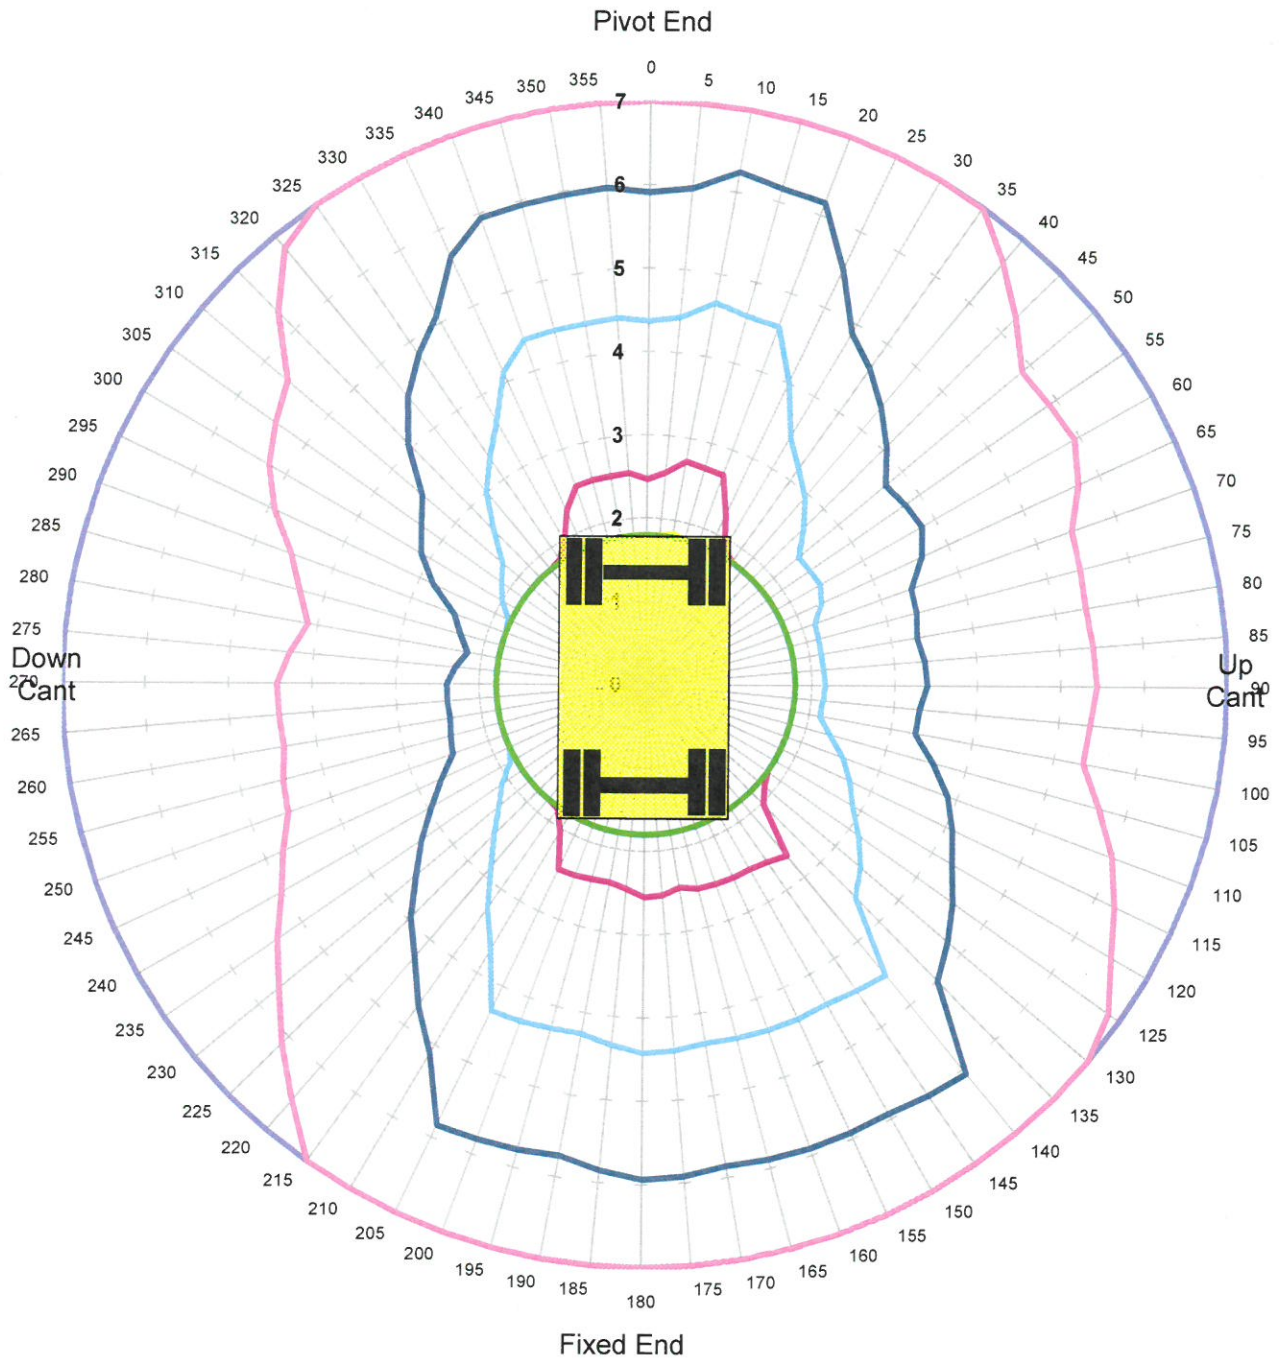

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			

DOOSAN ULTIMATE260

Max Capacity Contours of Radius(m) Plots 2.1m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 150mm Tandem Lift

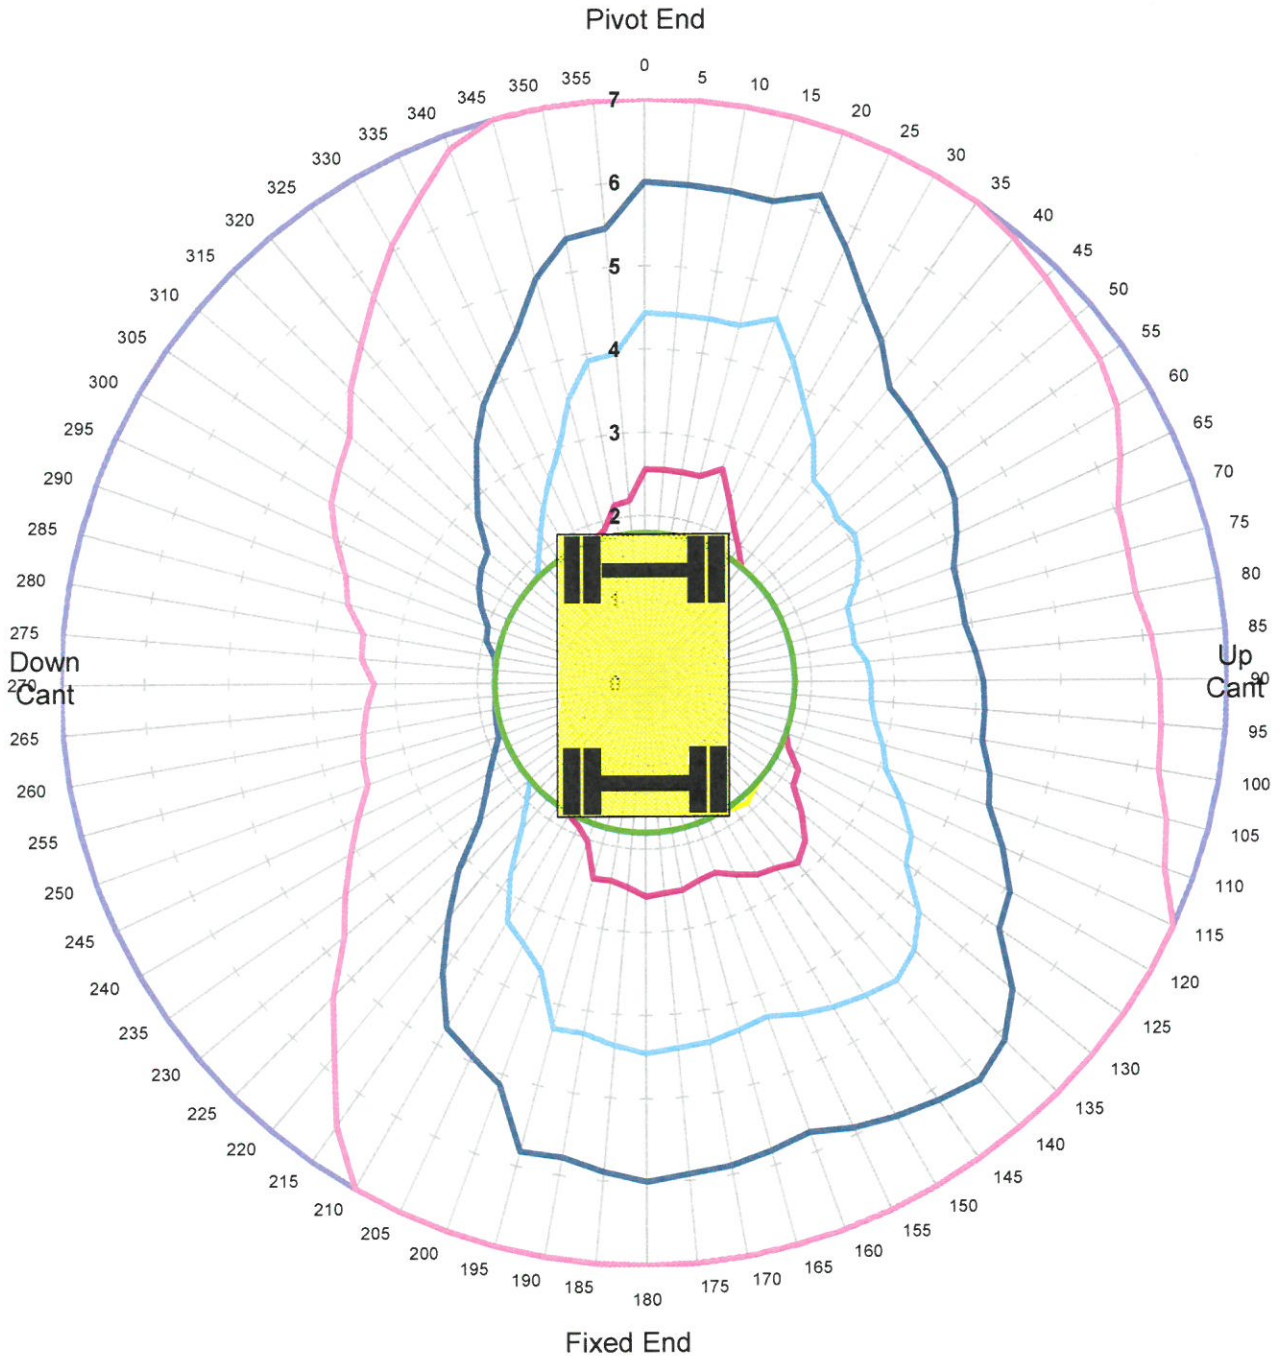

Units in Tonnes

1 2 3 4 6 8 10 12 14 16

MACHINE & MODEL:	DOOSAN ULTIMATE260	**REFERENCE:**	Stobart Rail Install
SERIAL No:	RRC241/50230	**DATE OF CHART:**	21-Apr-2017
EQUIPMENT:	1.85m+3.50m+2.10m	**SAFETY FACTOR:**	60.0%
COMMENT:			