




DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant -150mm ALP

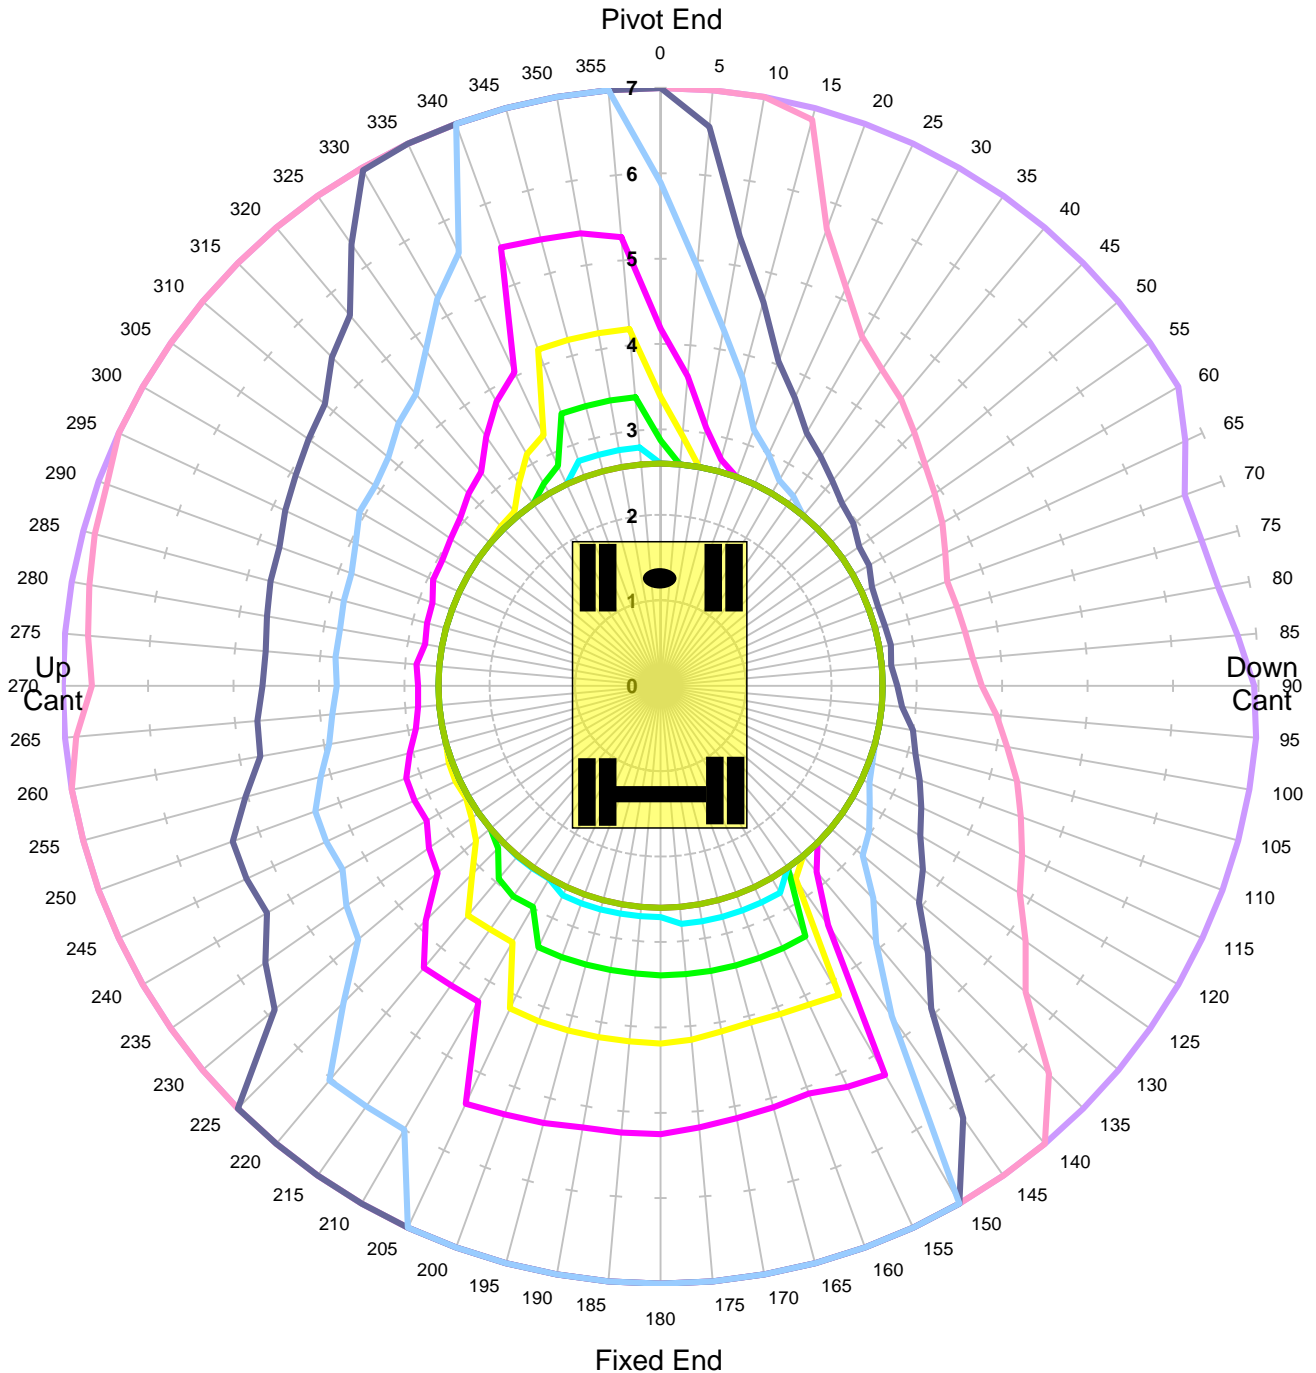

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	64.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant -50mm ALP

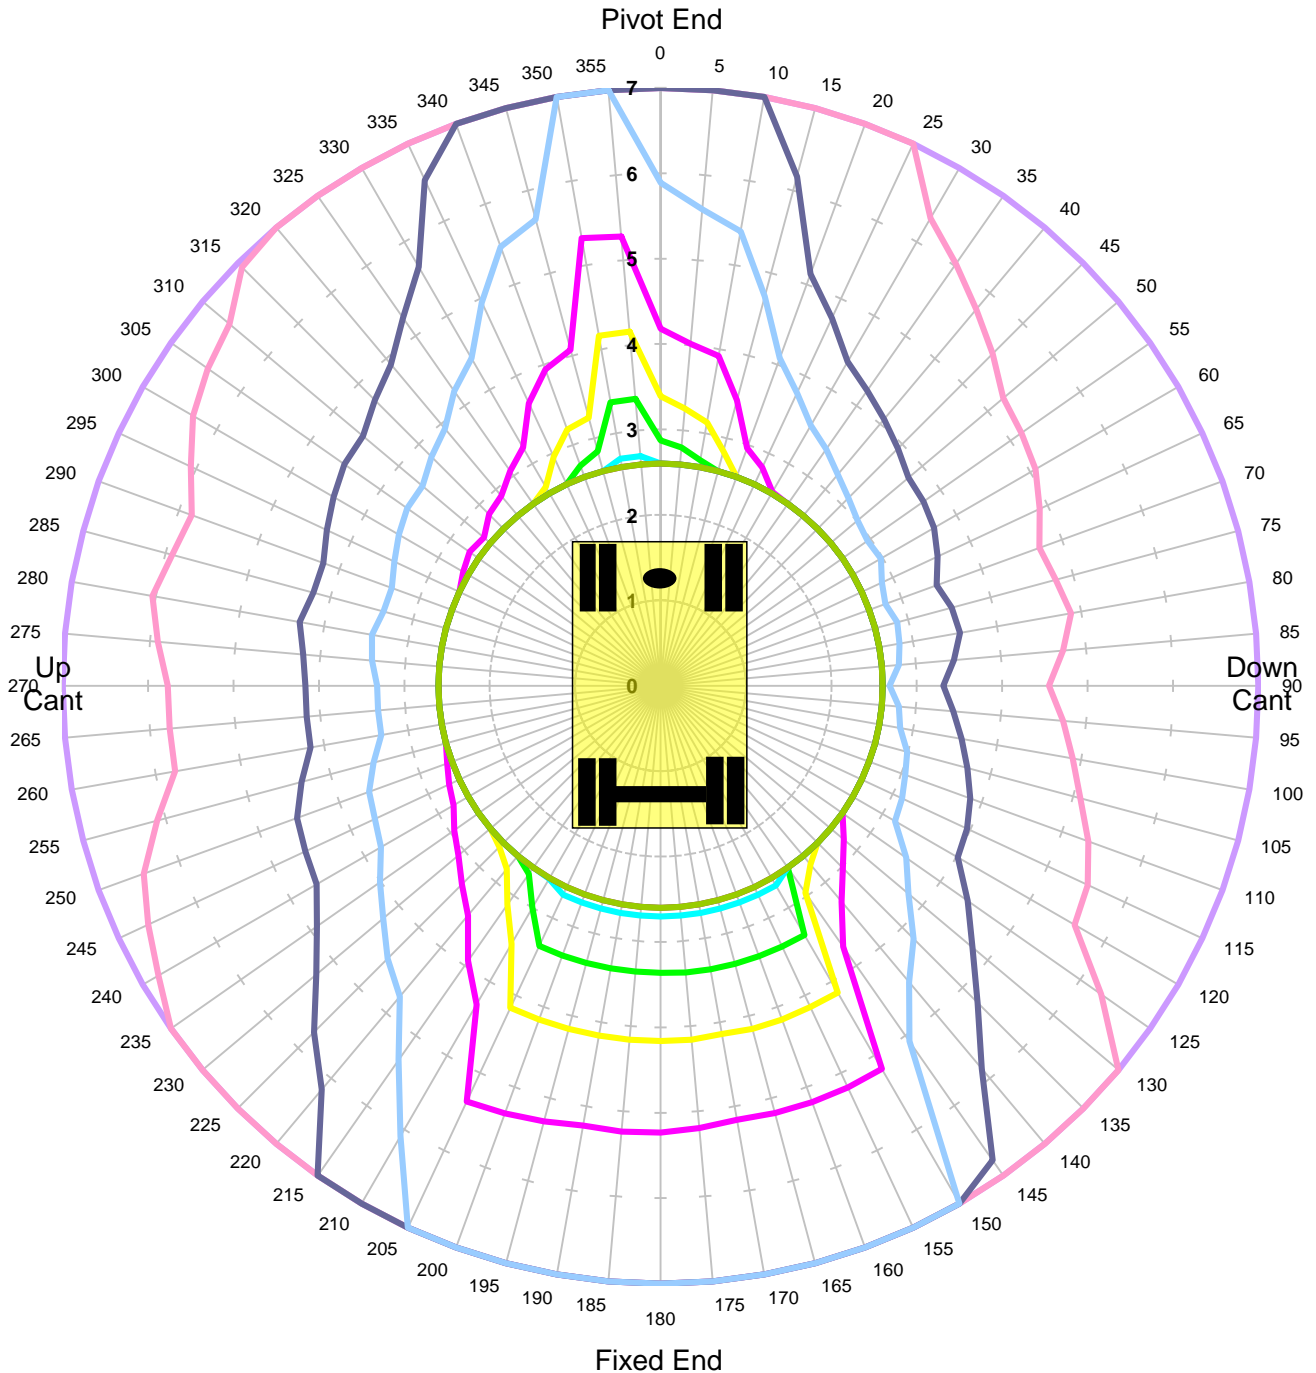

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	64.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant 50mm ALP

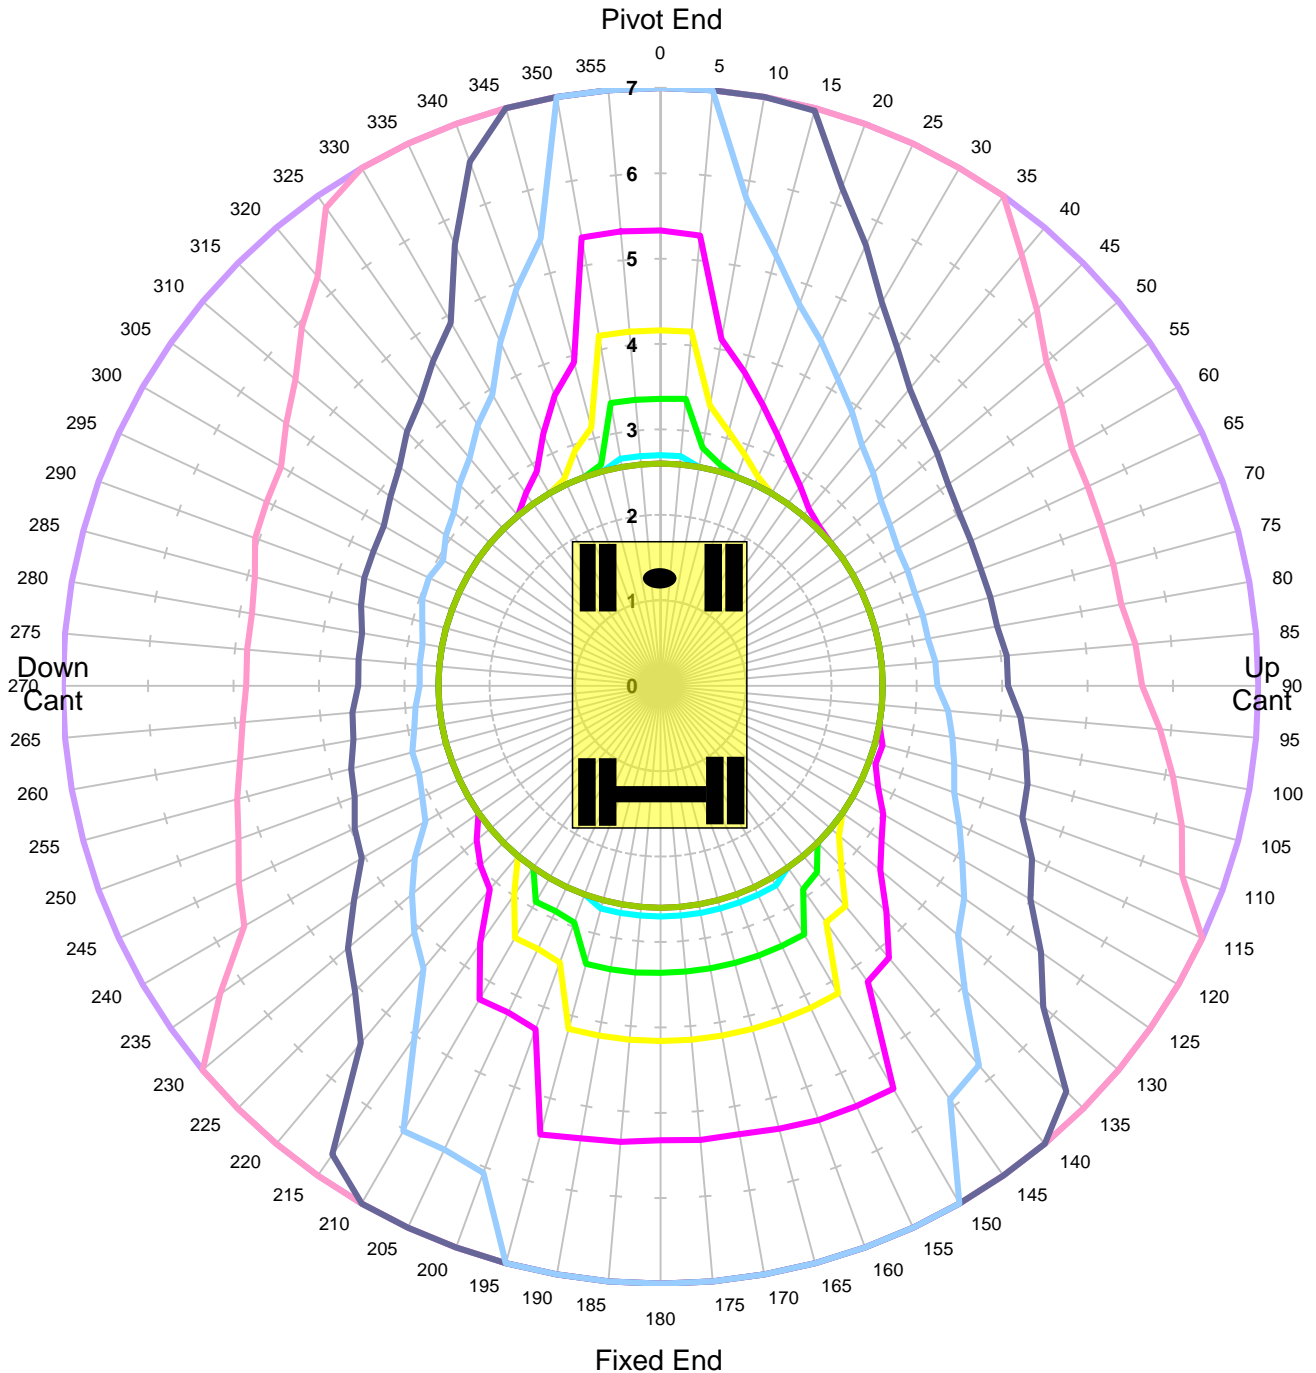

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	64.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant 150mm ALP

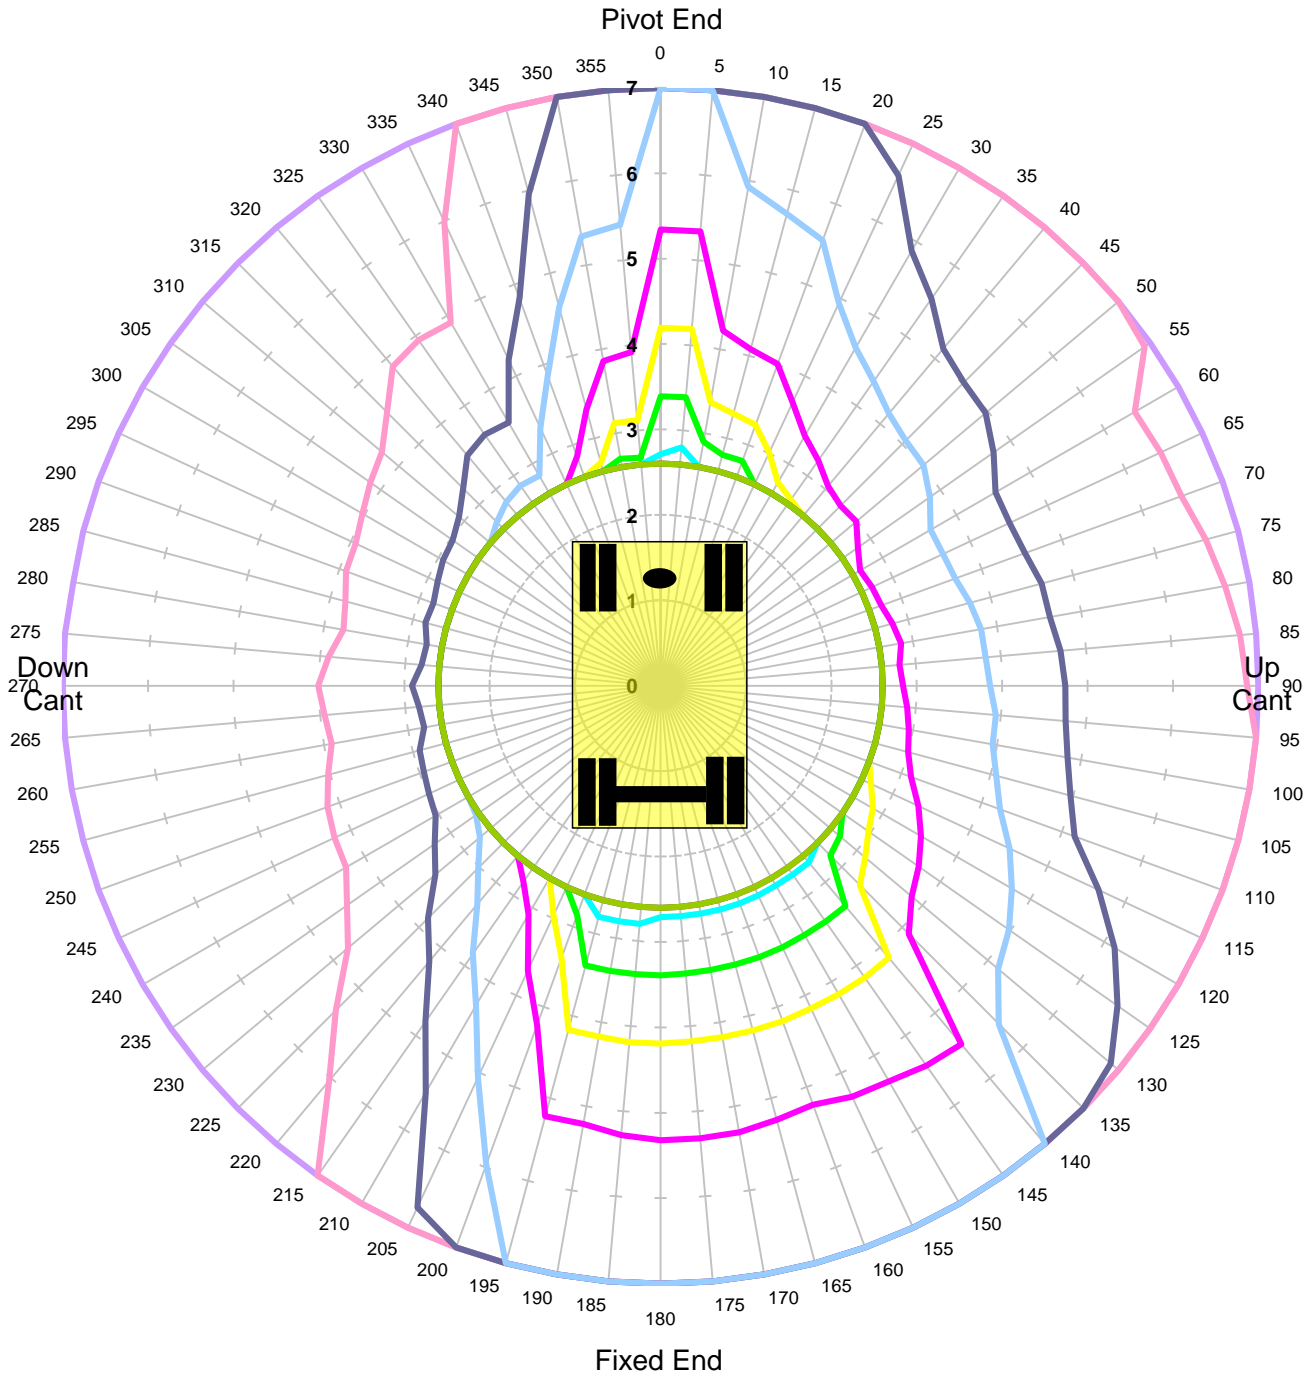

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	64.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant -150mm ALP

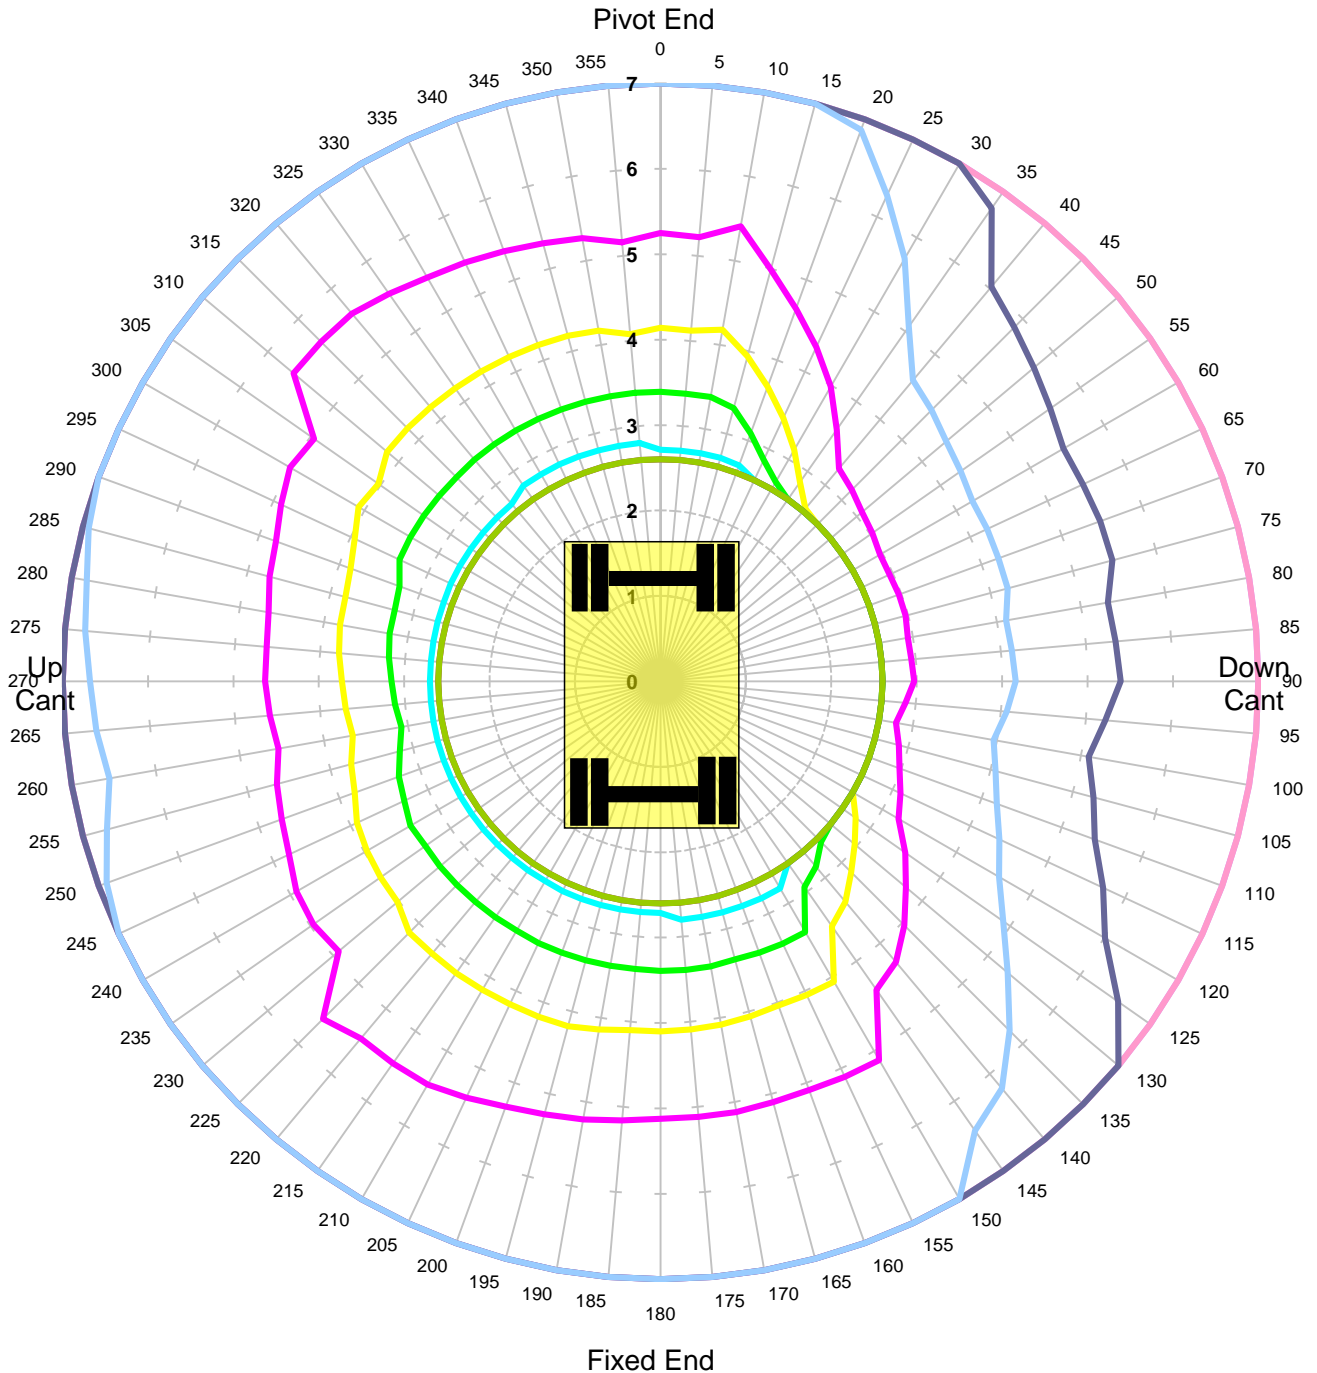

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
 Gradient 1 in -25 Height 2m

Locked Rail Cant -50mm ALP

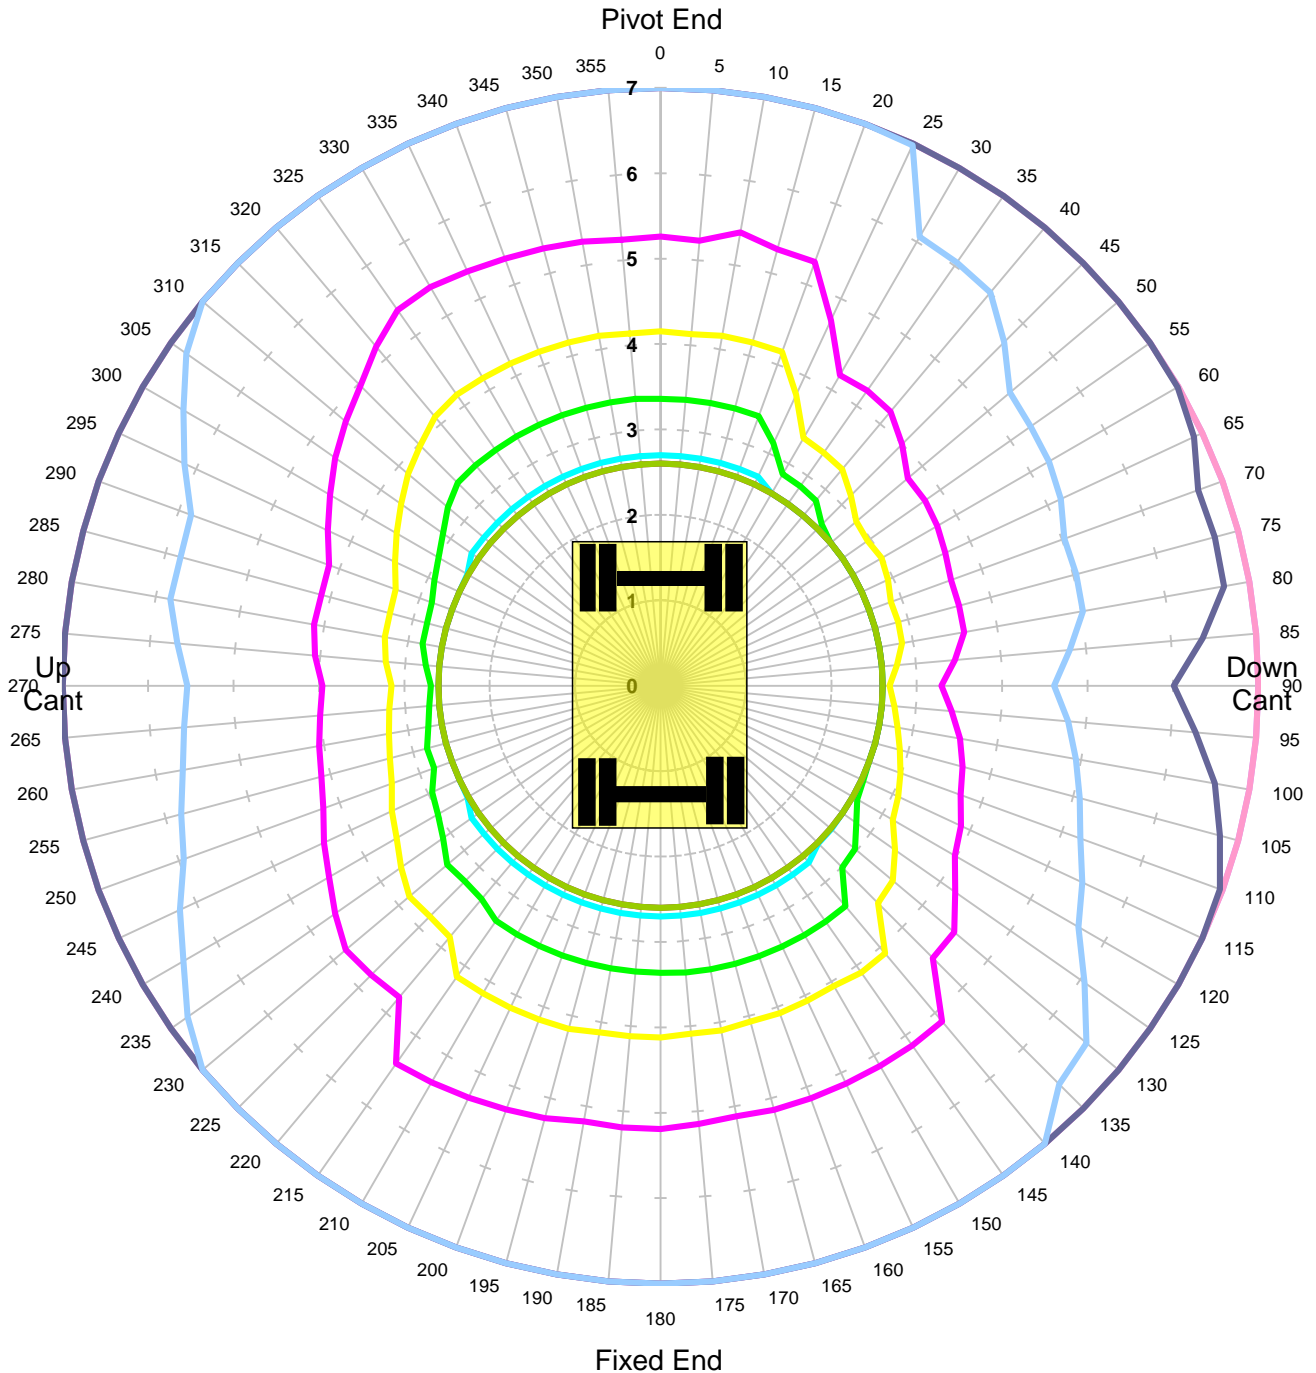

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
 Gradient 1 in -25 Height 2m

Locked Rail Cant 50mm ALP

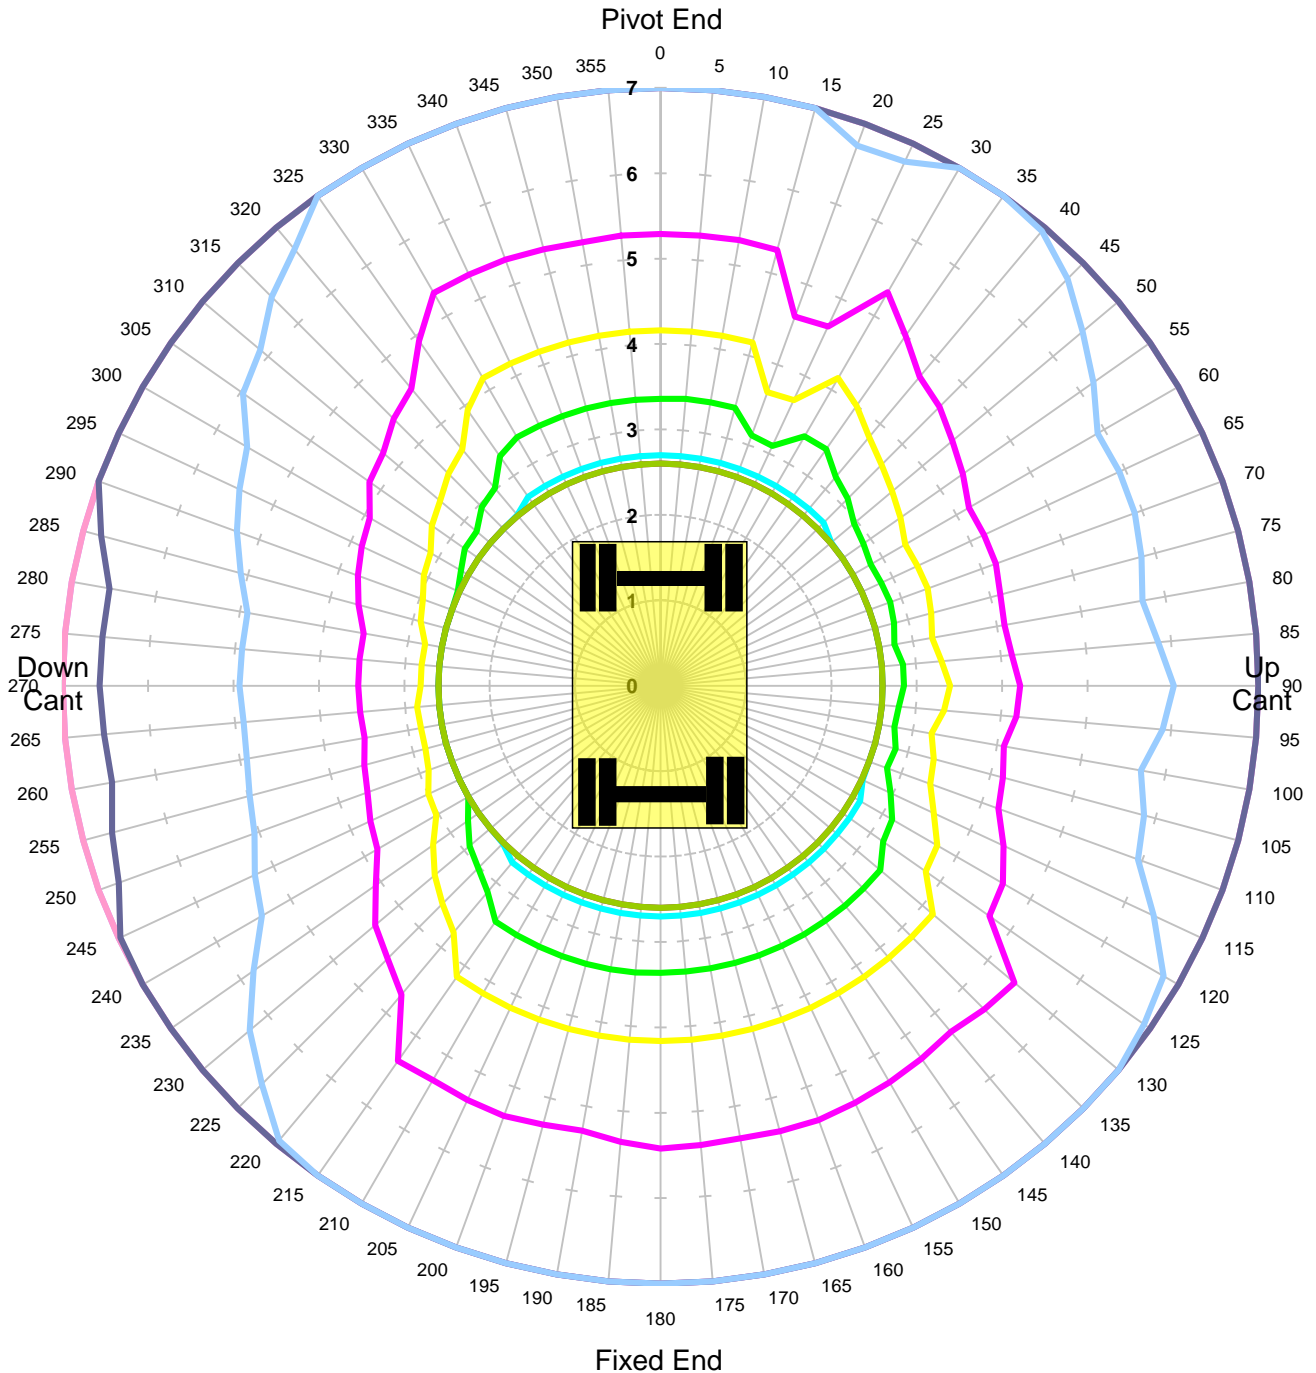

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant 150mm ALP

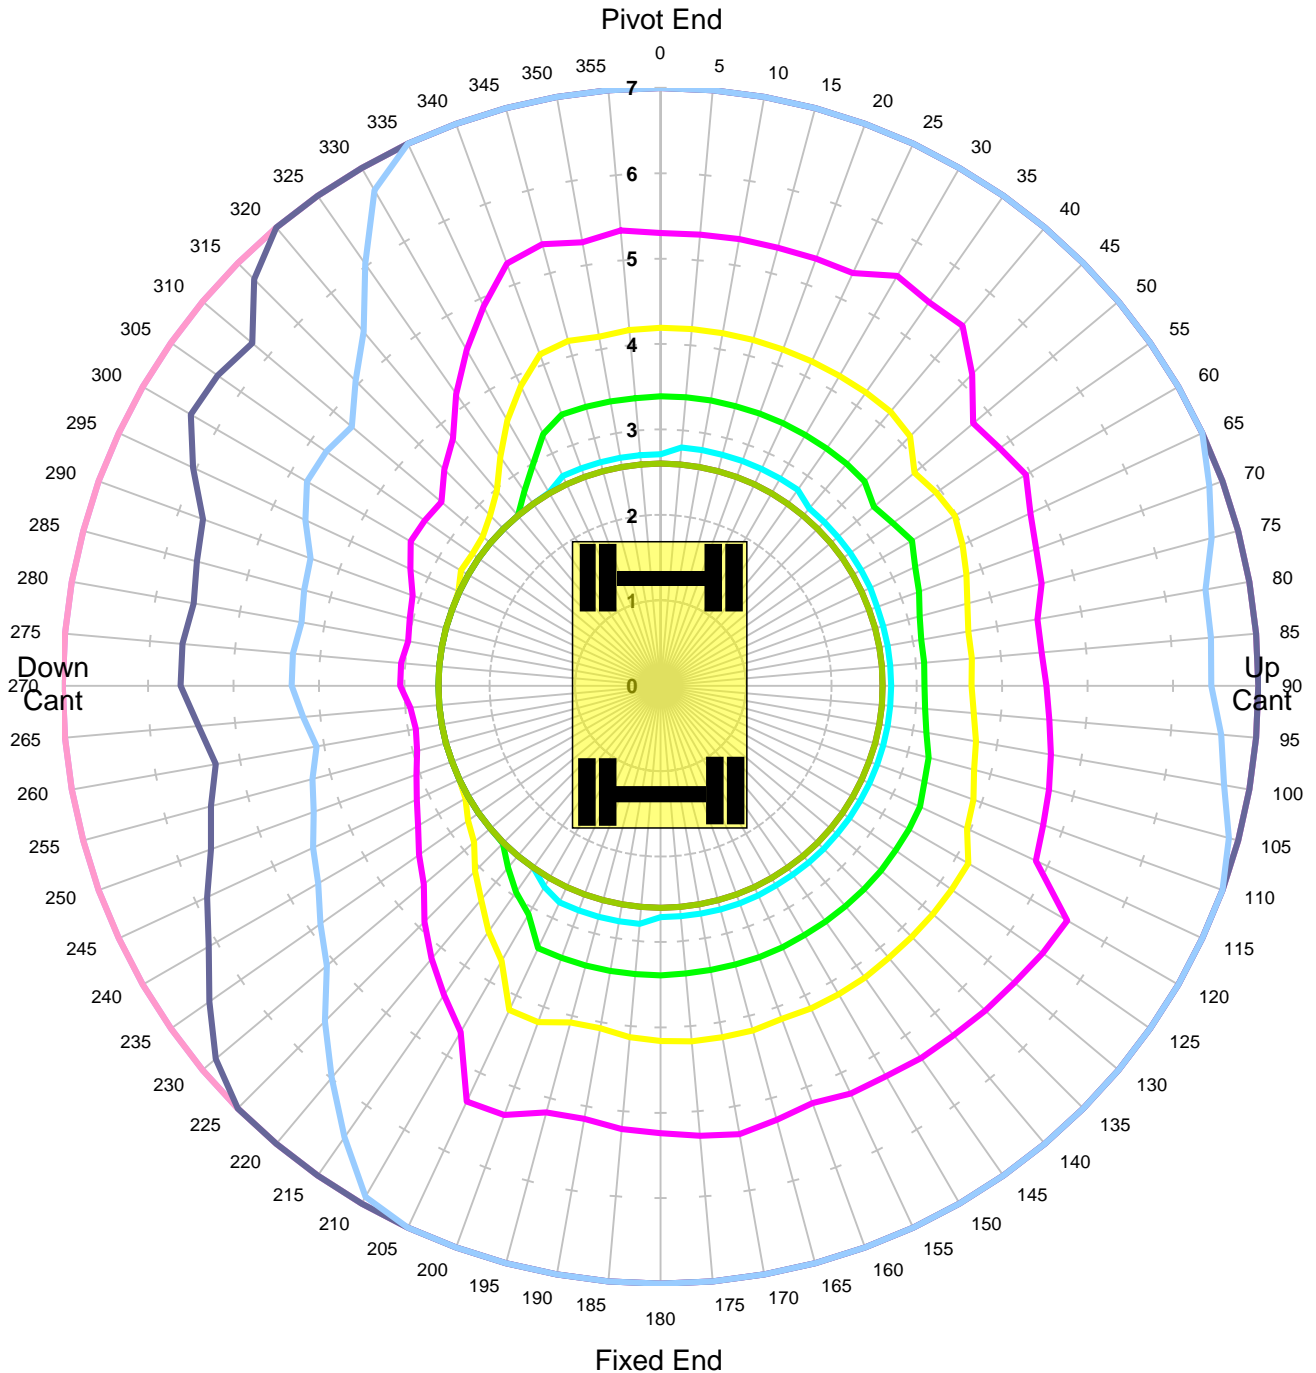

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Level Ground Height 2m

Unlocked Road ALP

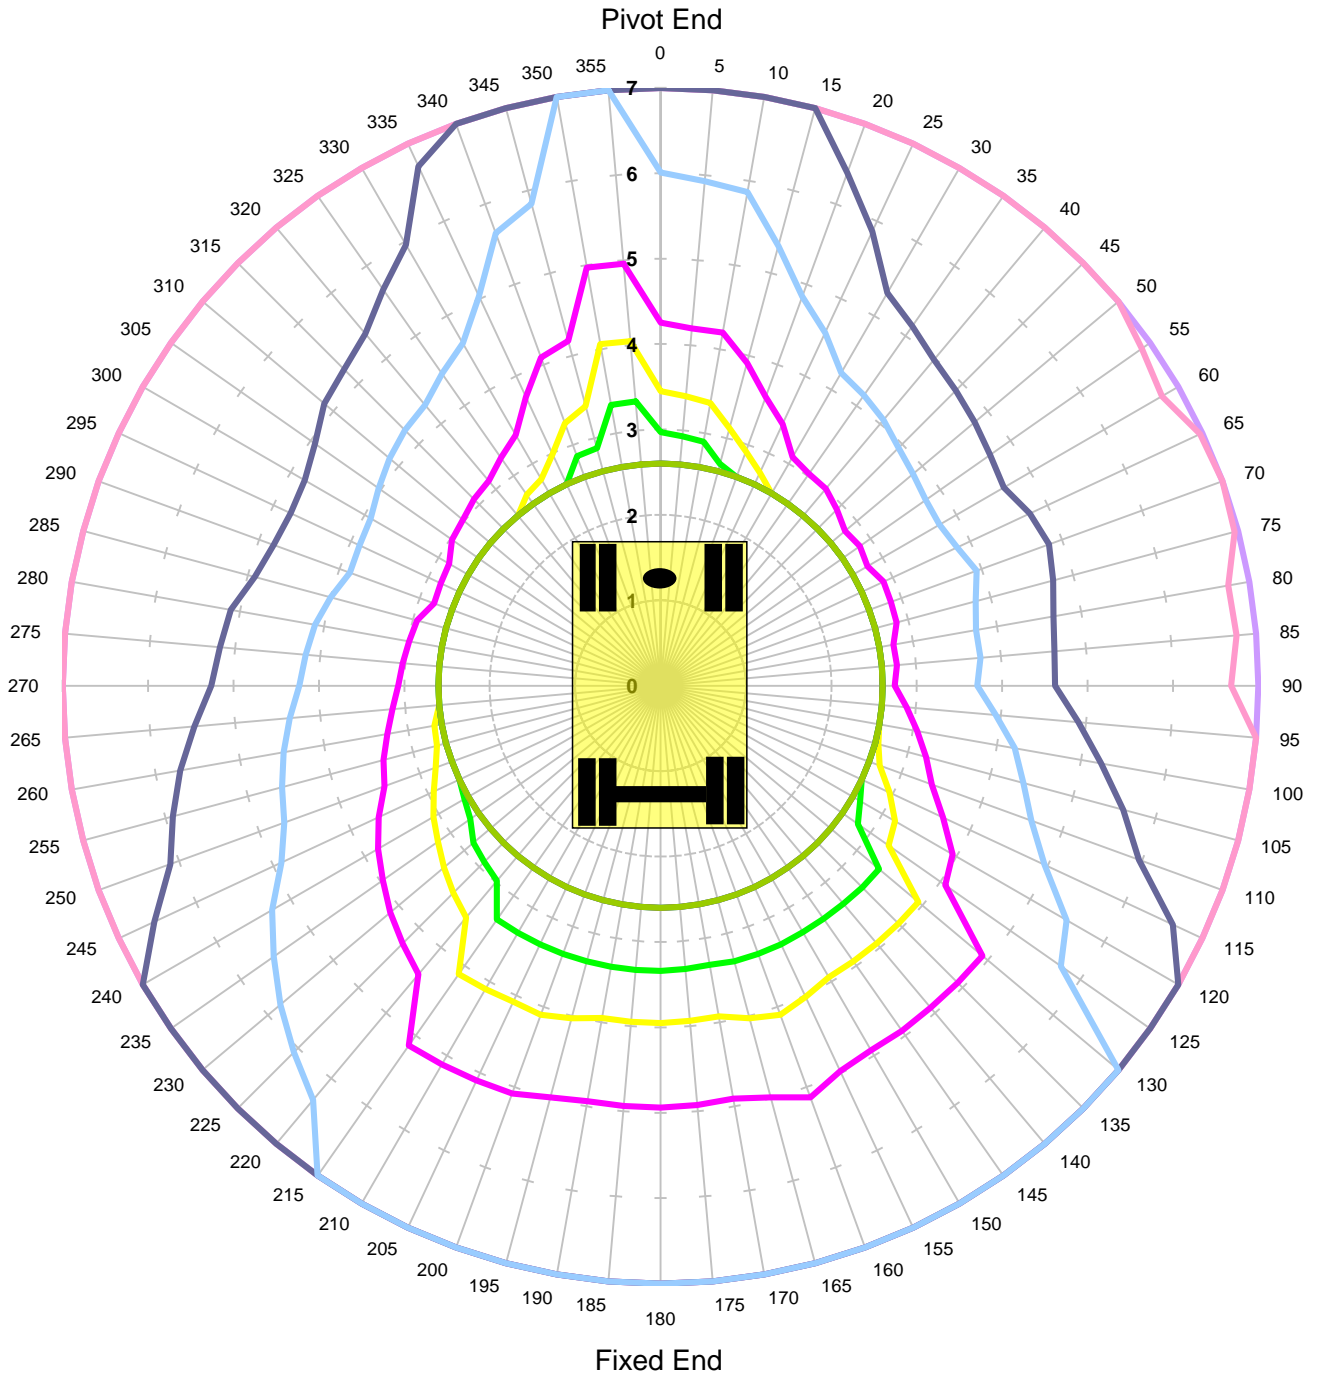

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	71.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, ADDITIONAL LIFTING POINT		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Level Ground Height 2m

Locked Road ALP

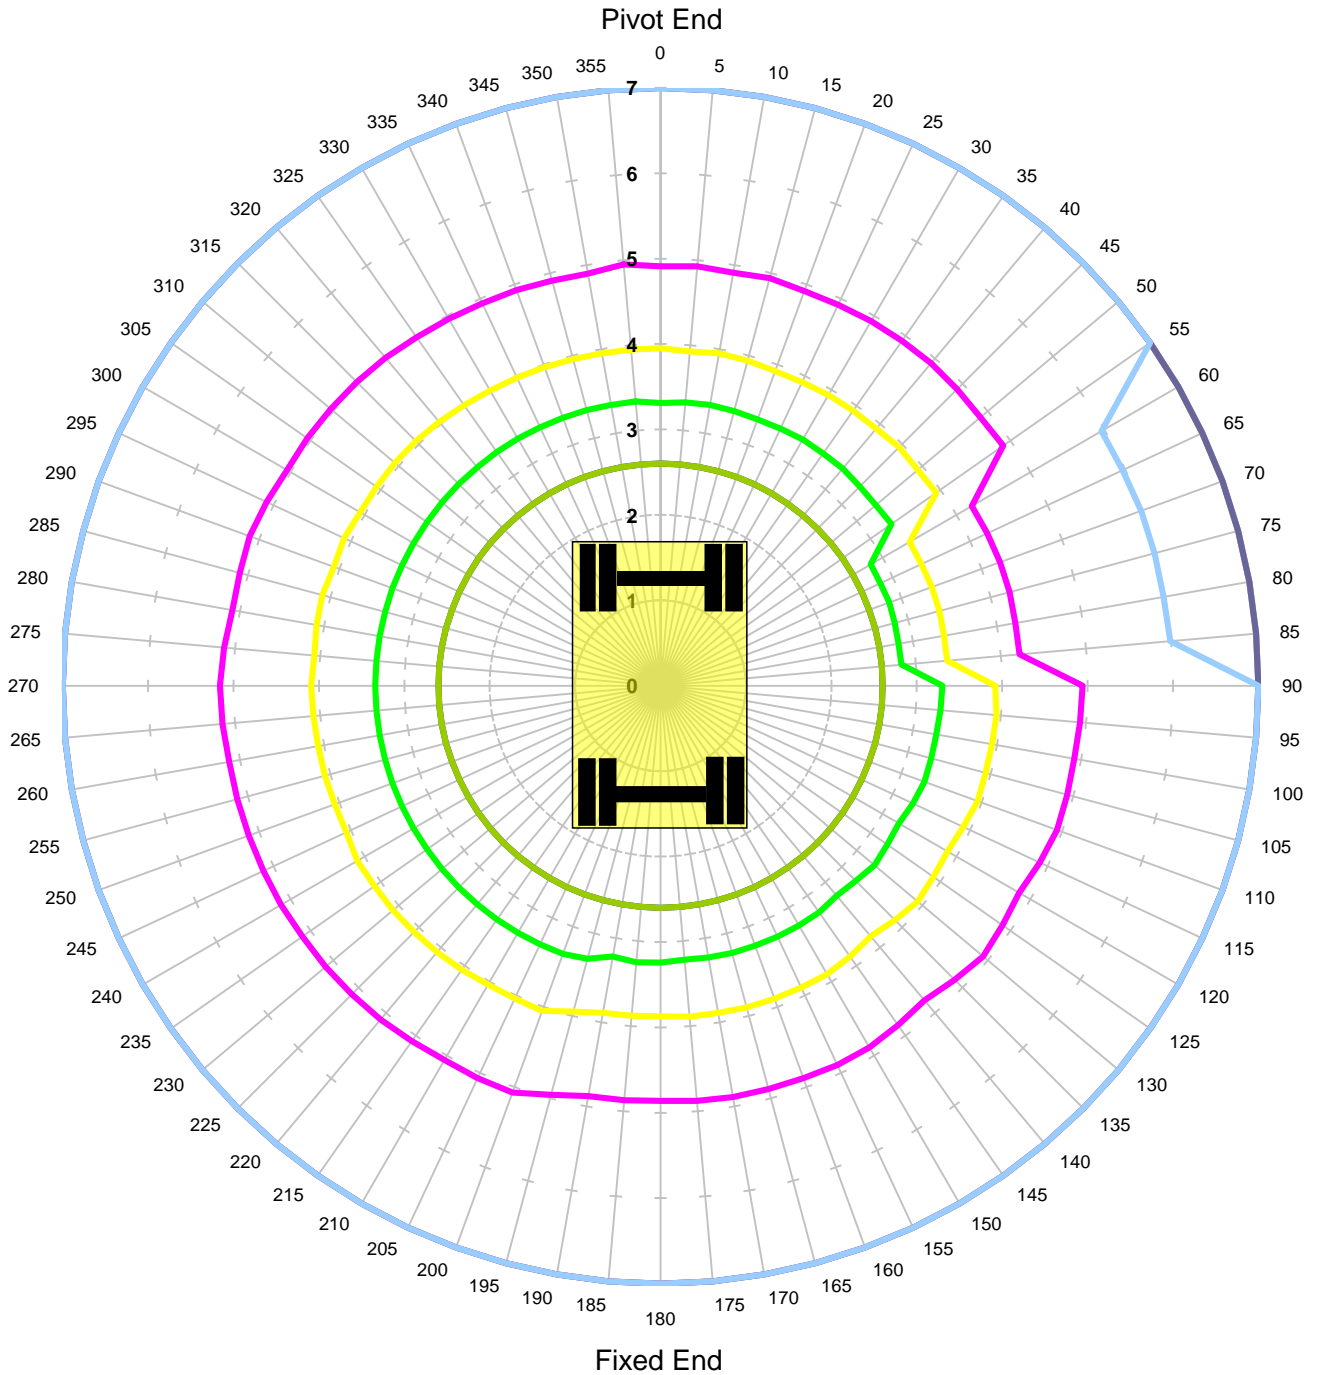

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	71.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant -150mm ALP Tandem

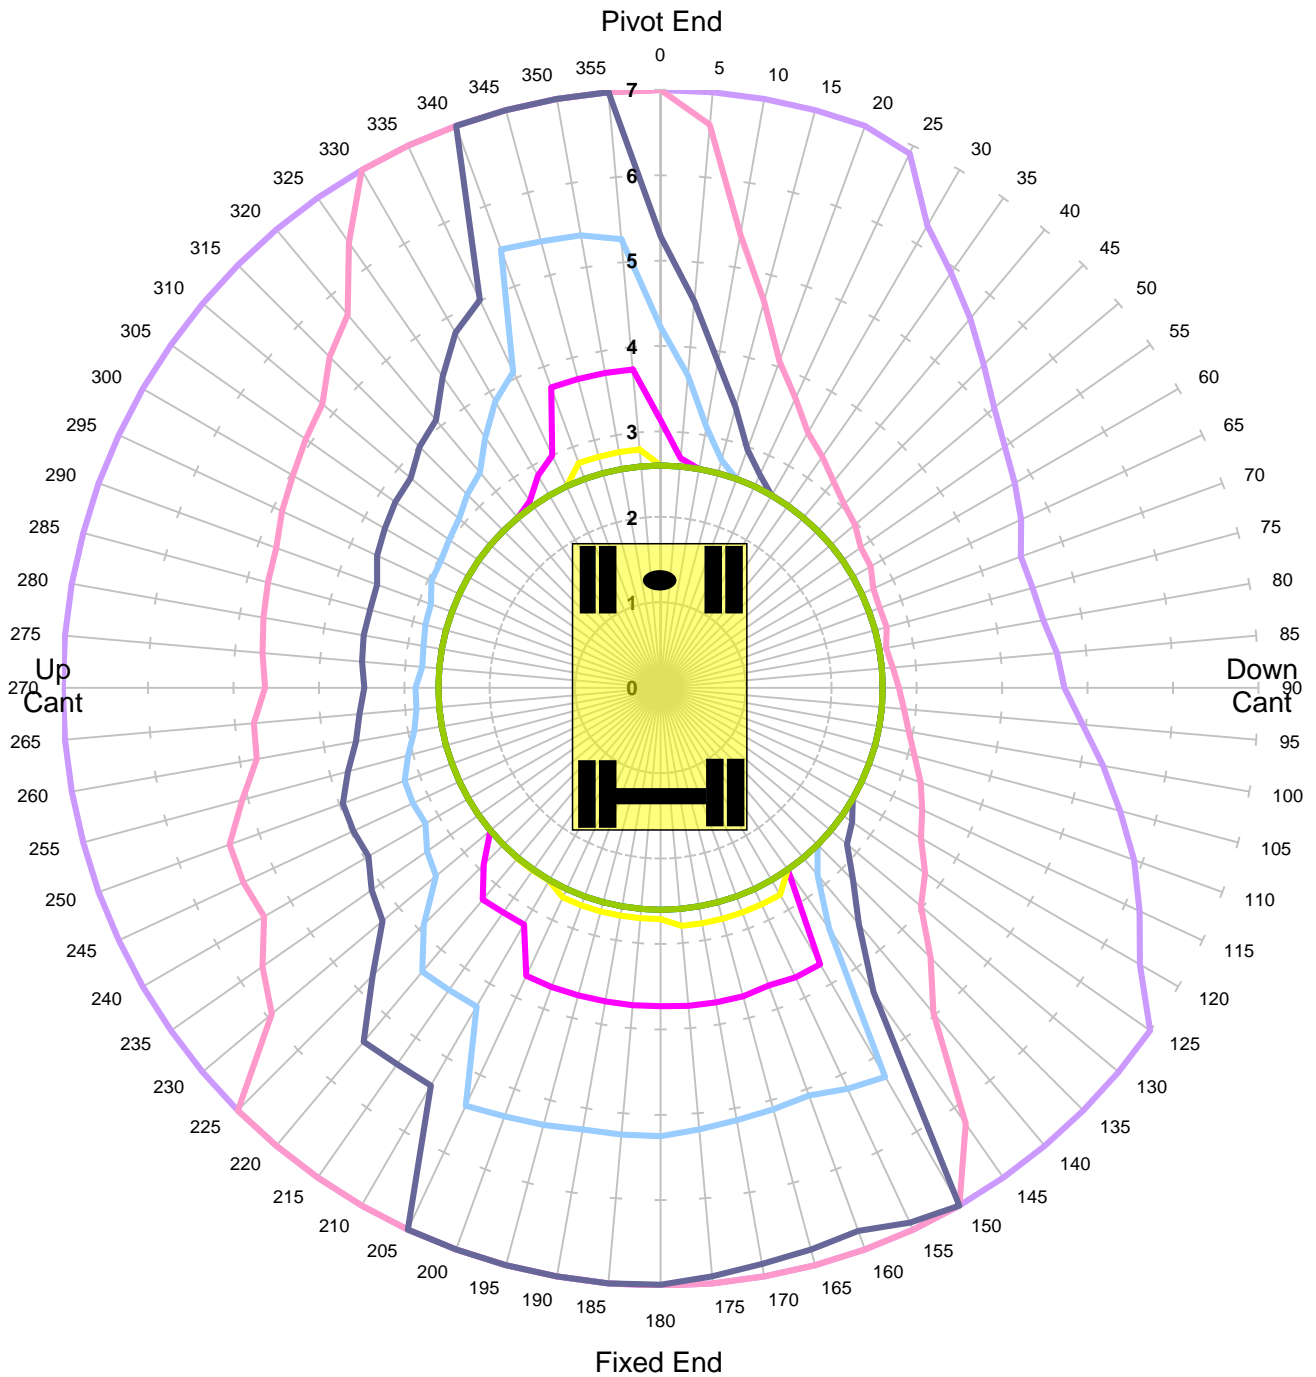

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	43.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, ADDITIONAL LIFTING POINT		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant -50mm ALP Tandem

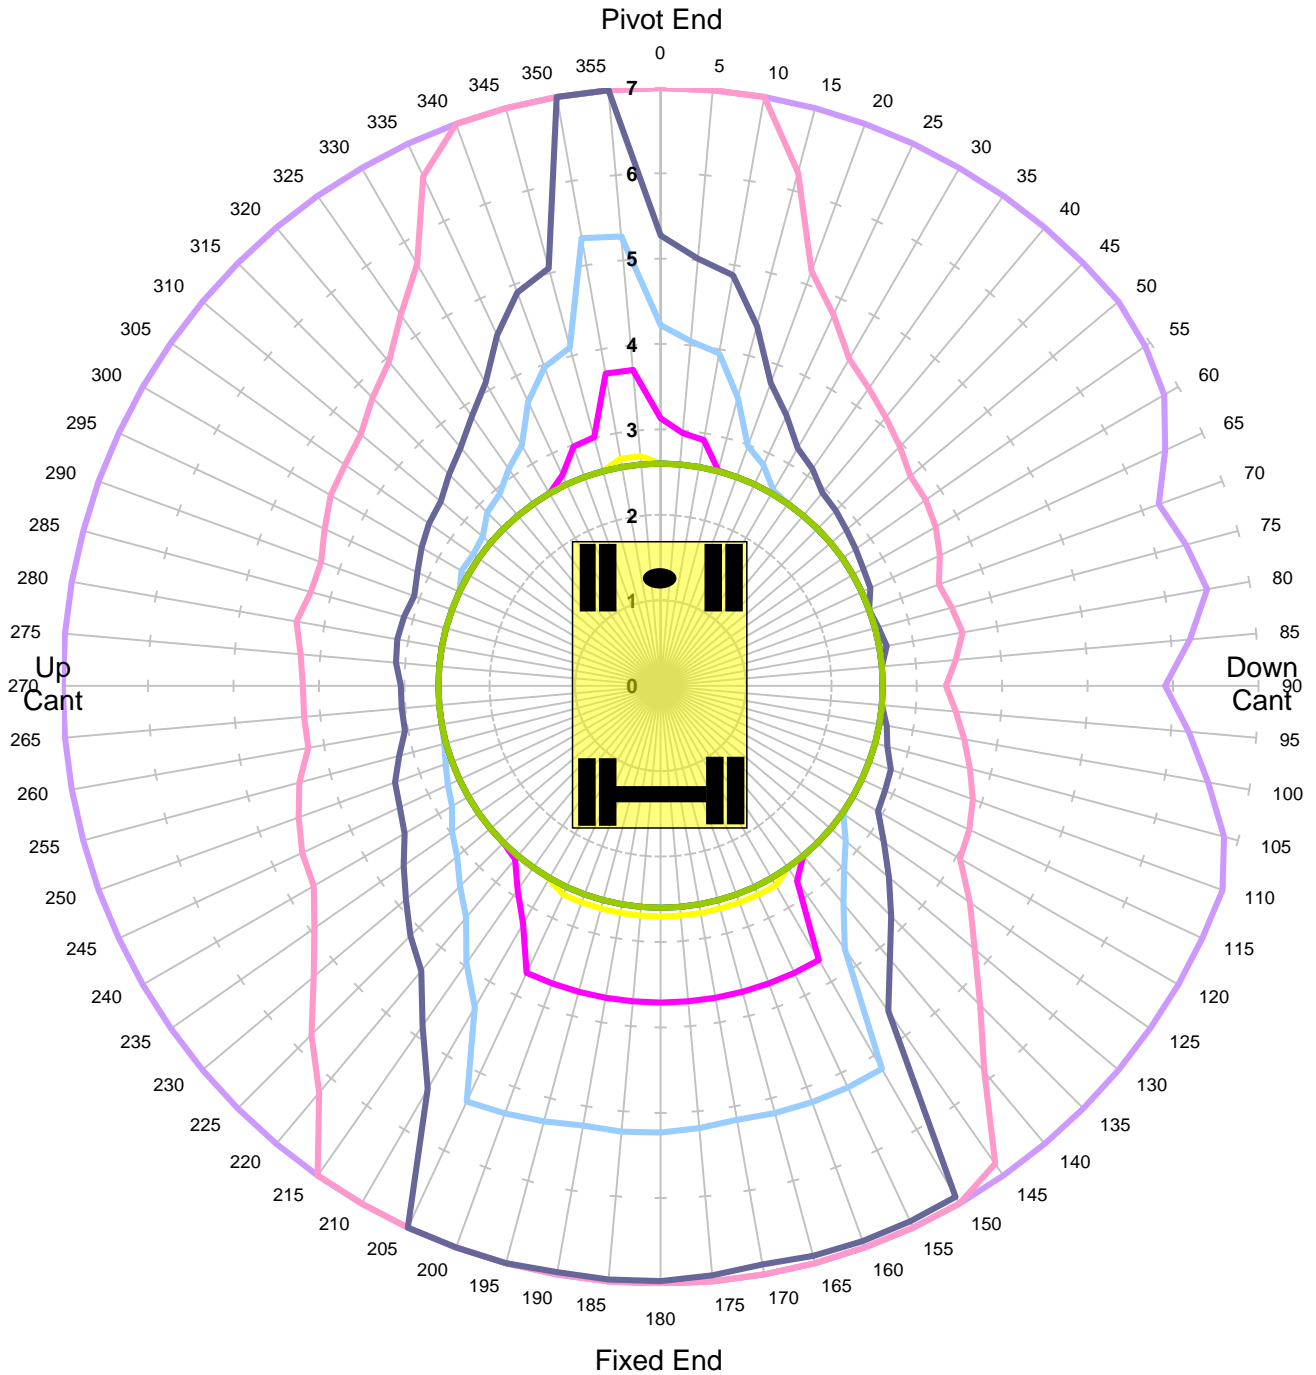

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	43.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, ADDITIONAL LIFTING POINT		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant 50mm ALP Tandem

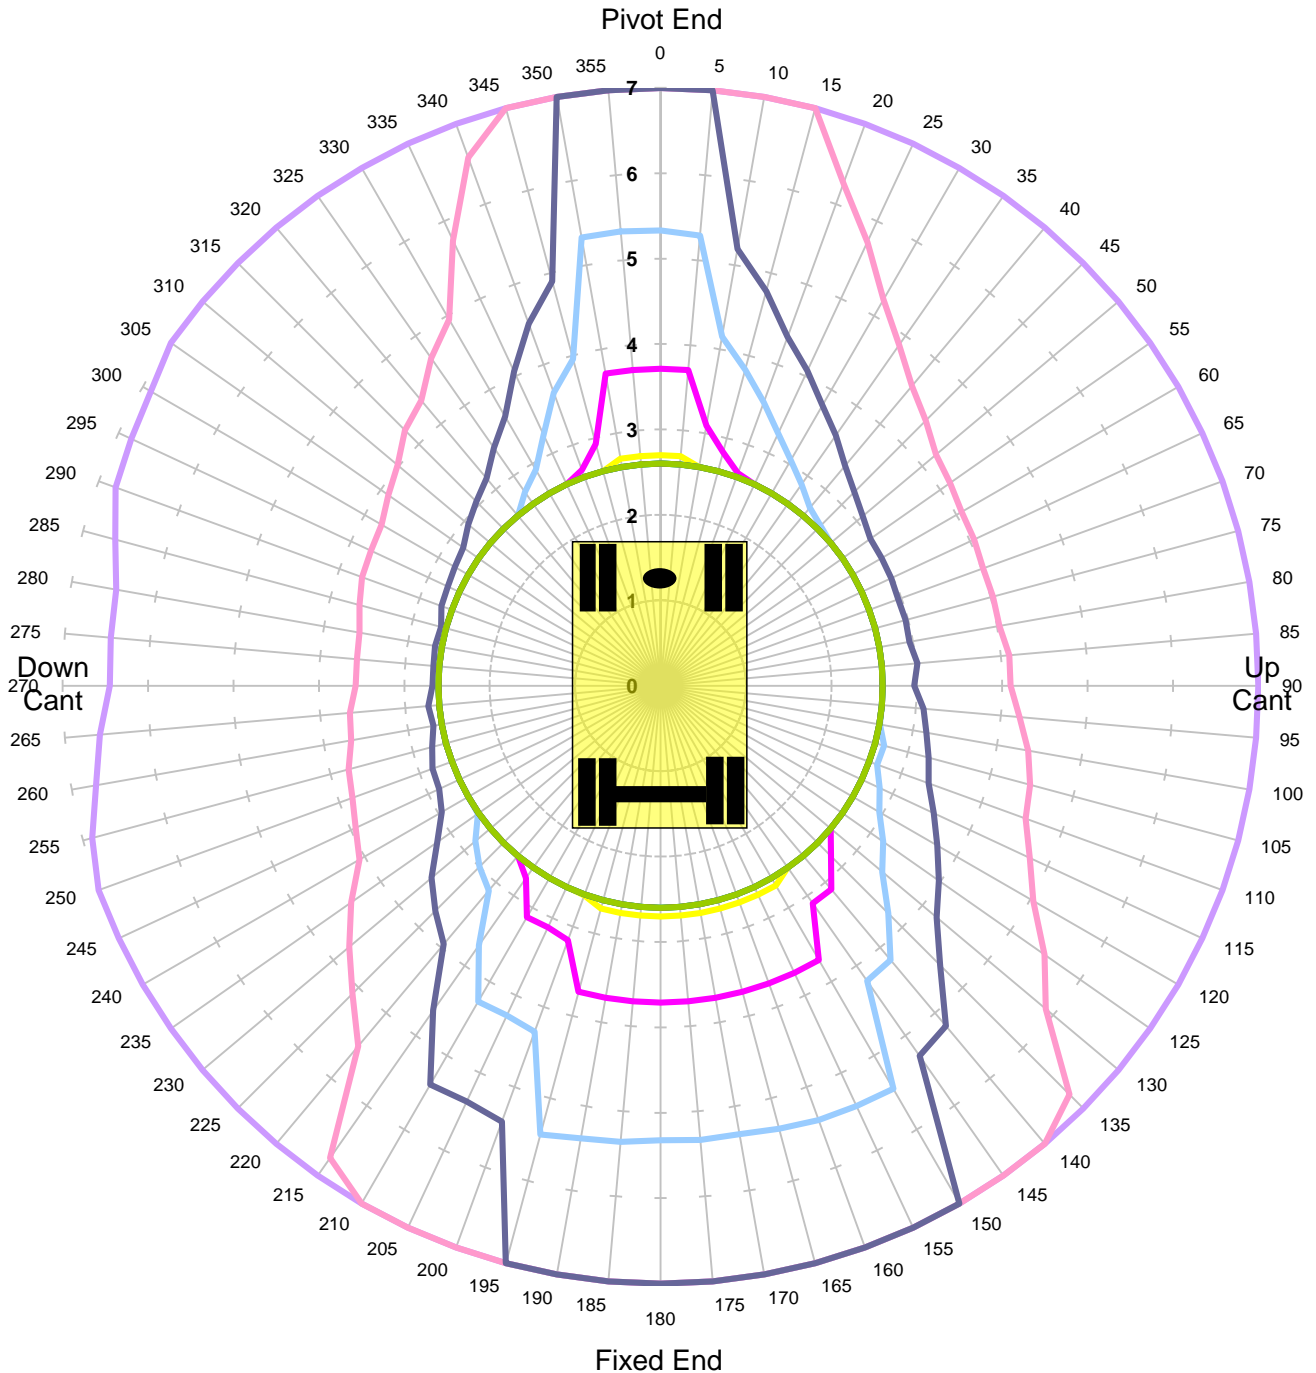

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	43.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant 150mm ALP Tandem

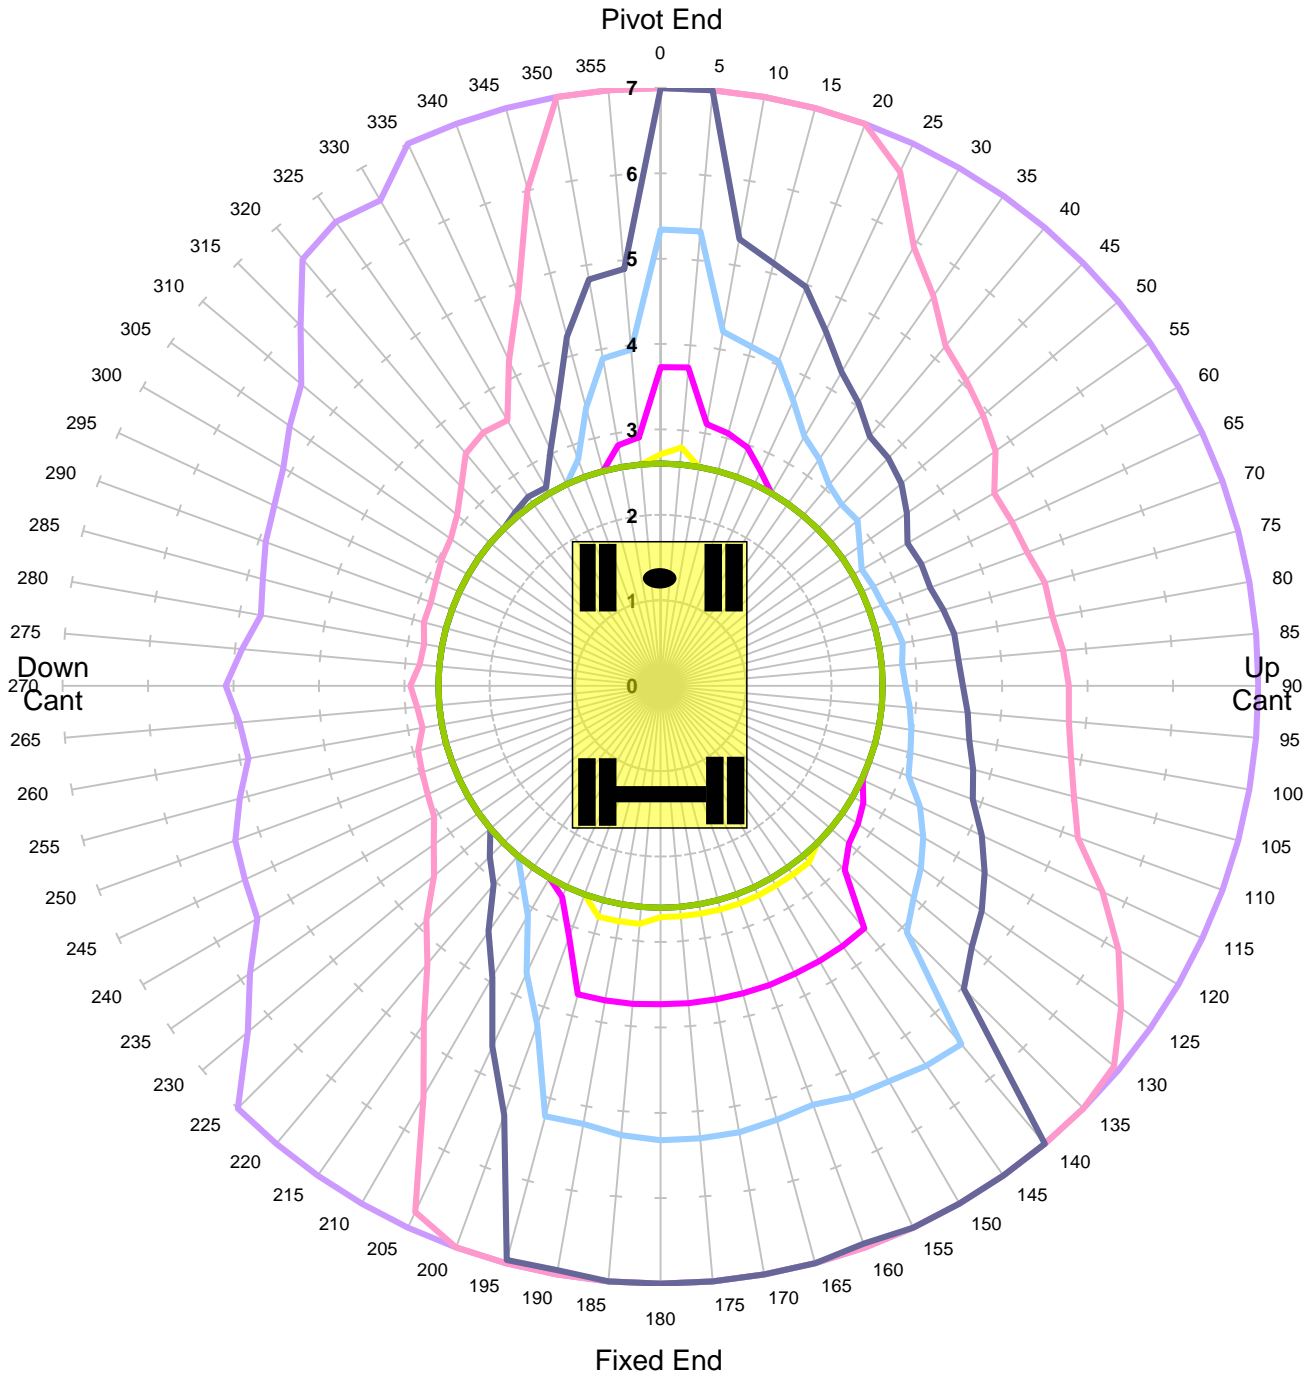

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	43.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant -150mm ALP Tandem

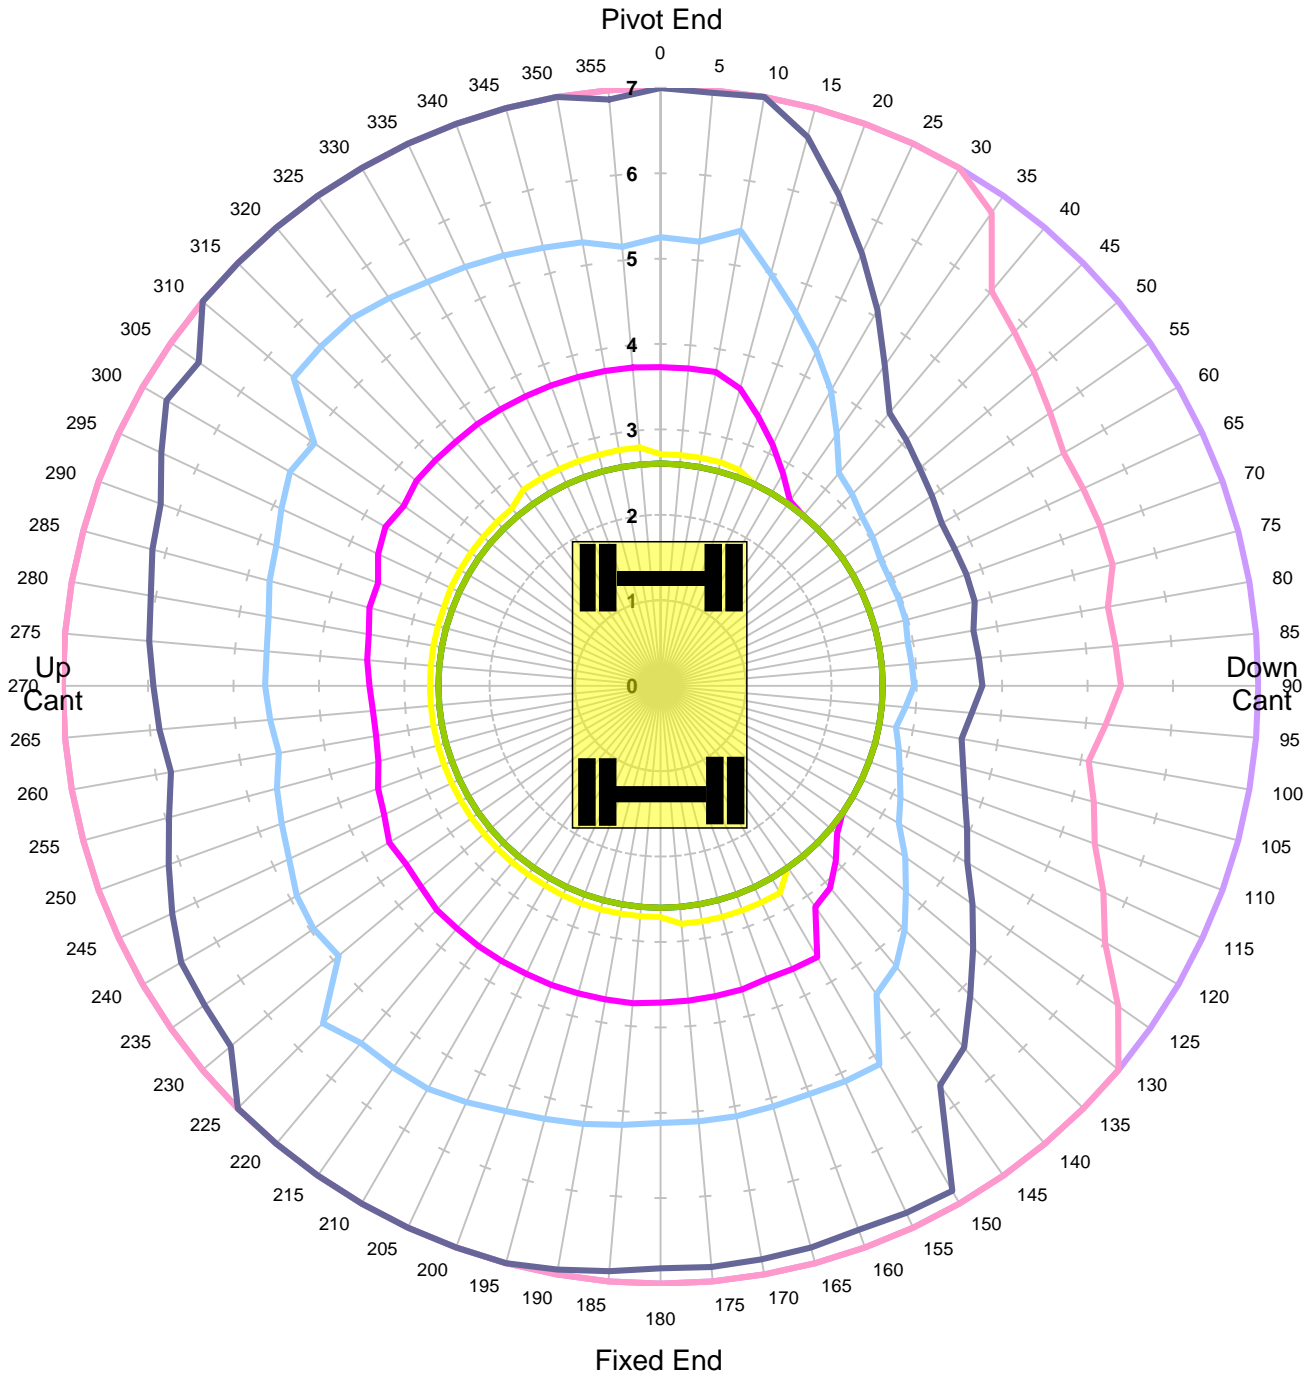

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant -50mm ALP Tandem

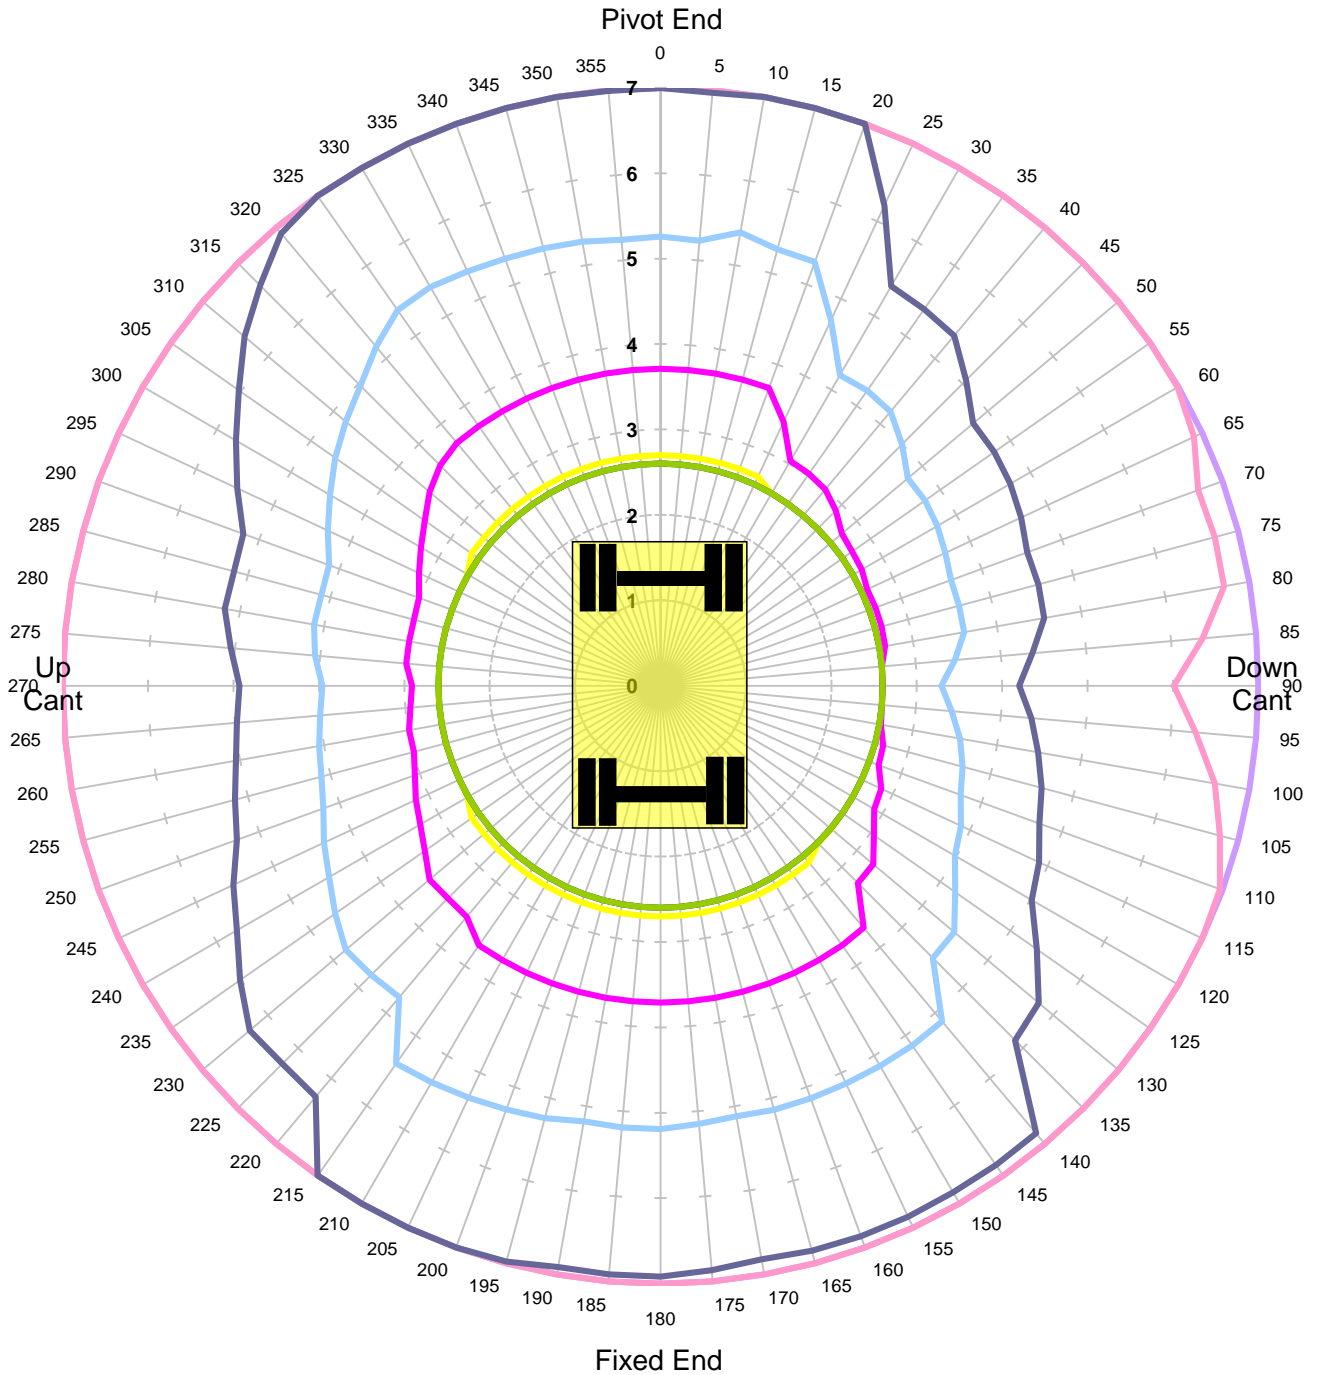

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, ADDITIONAL LIFTING POINT		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant 50mm ALP Tandem

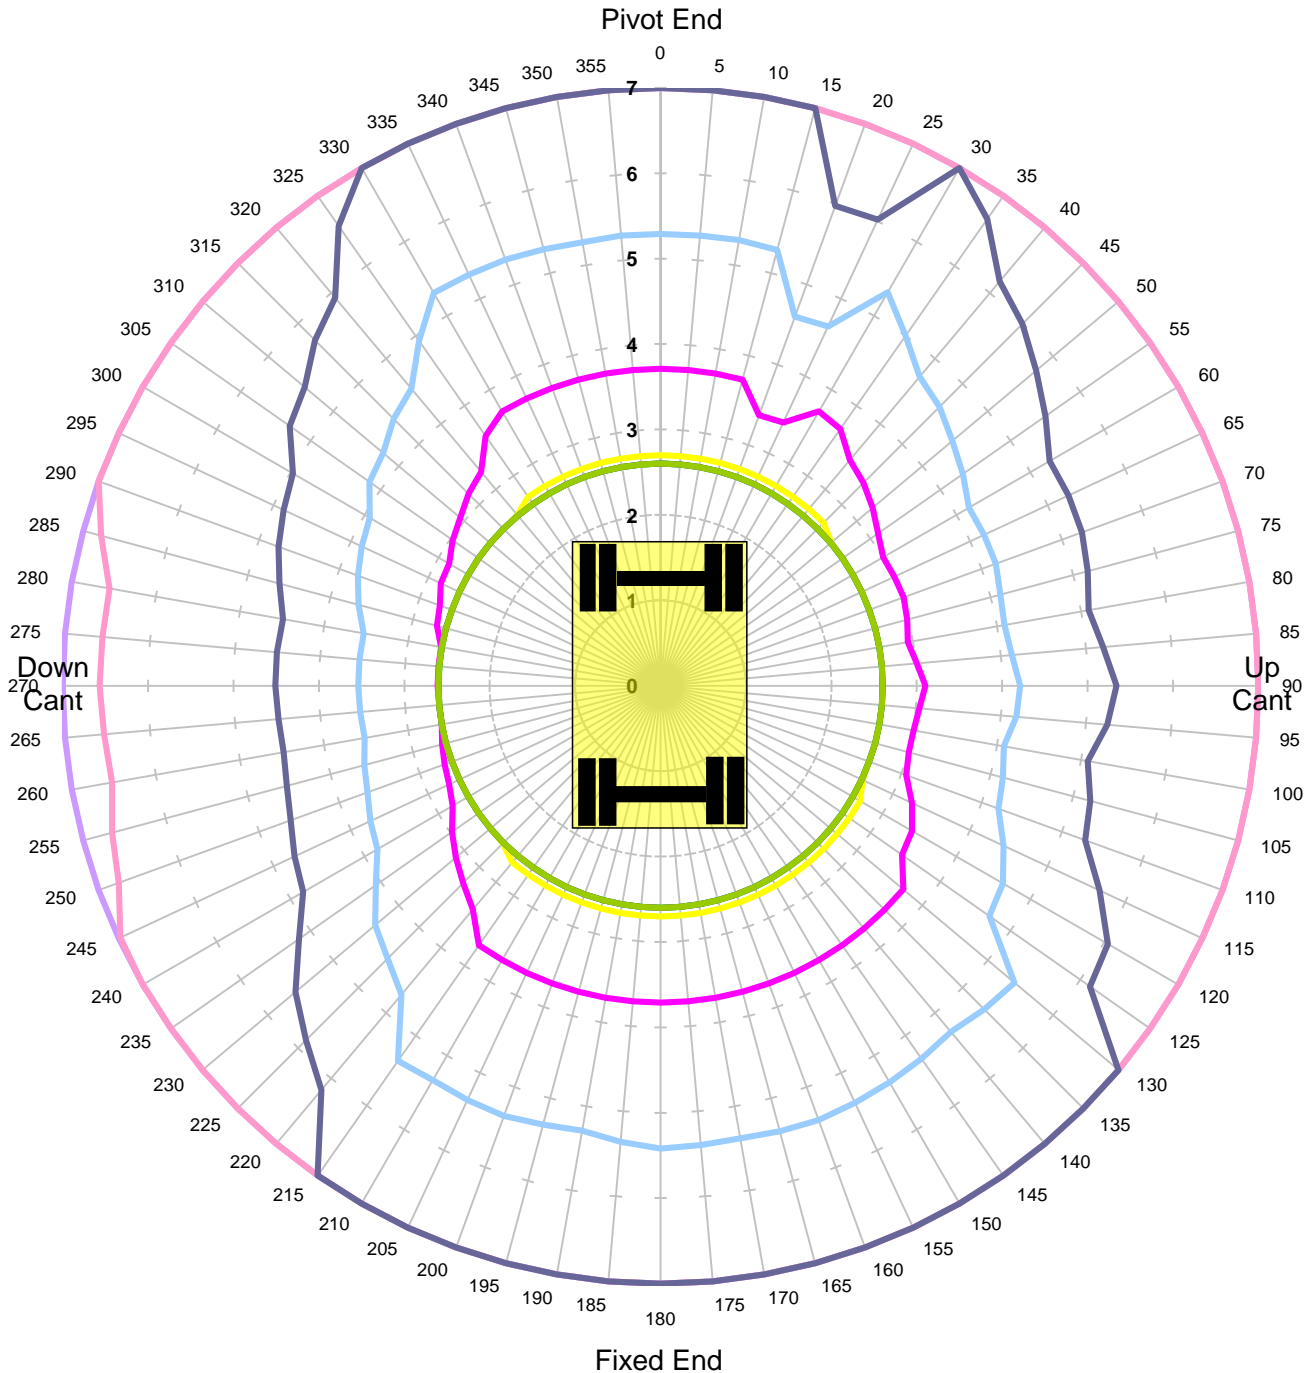

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, ADDITIONAL LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant 150mm ALP Tandem

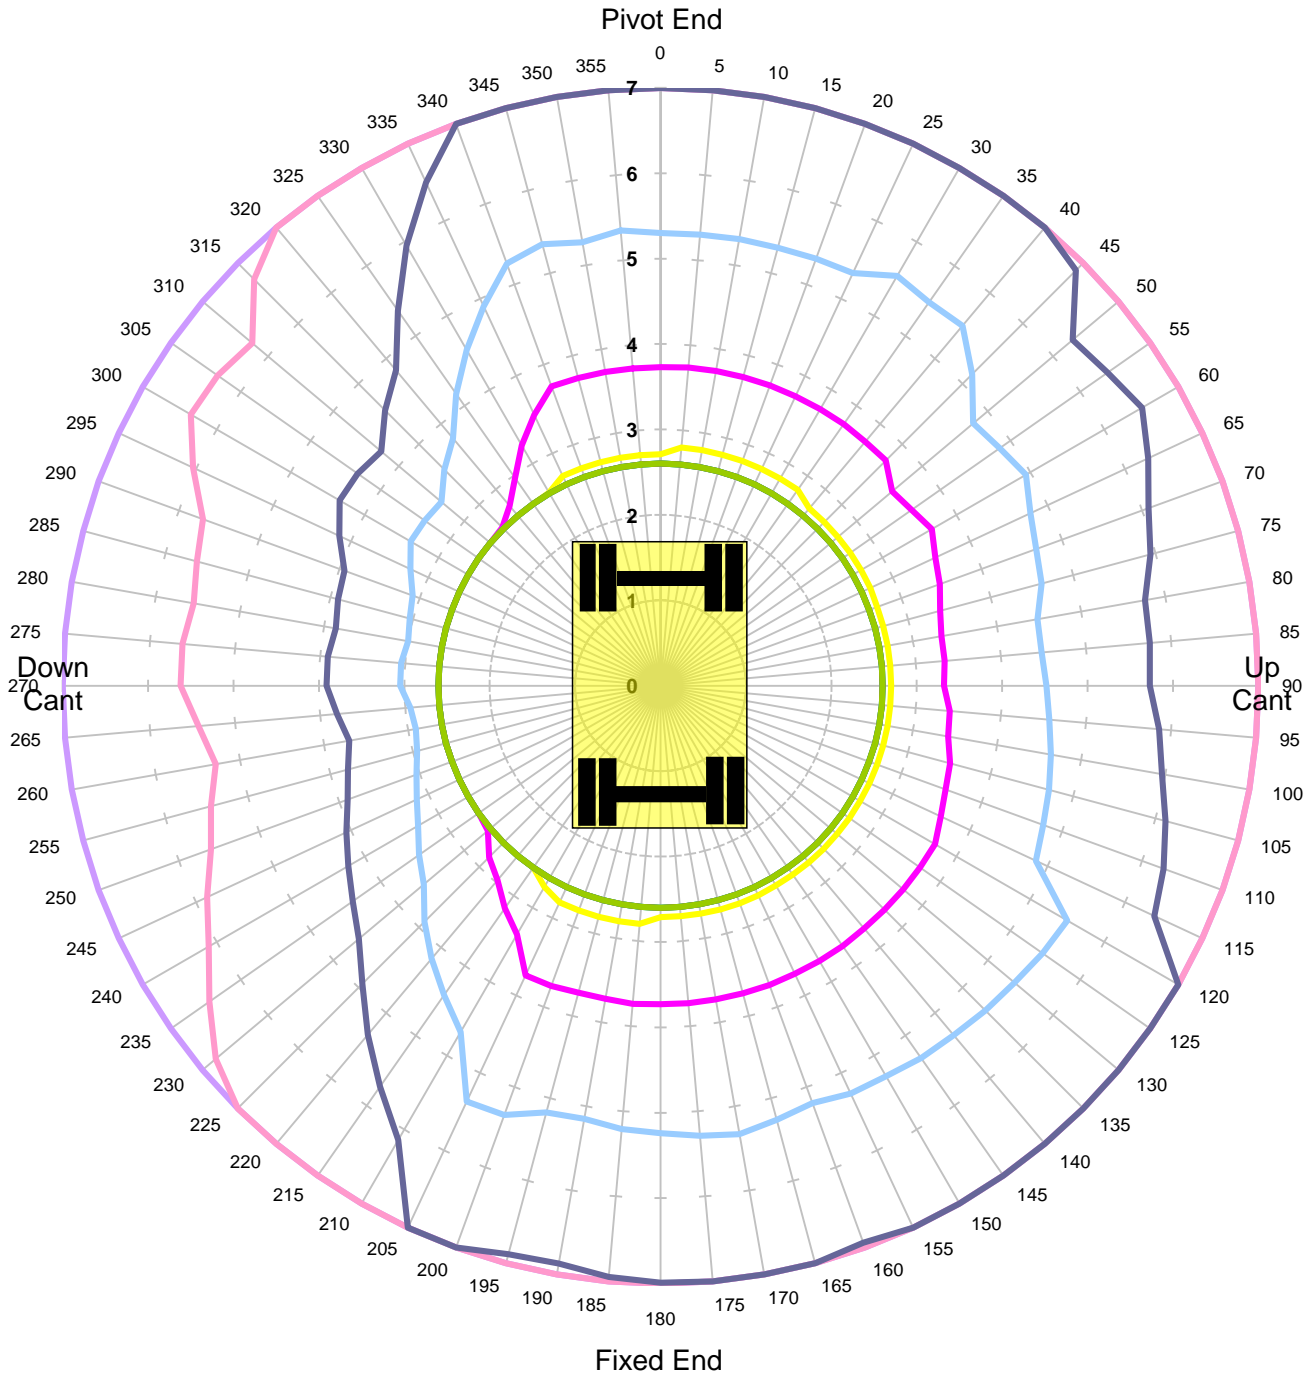

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, ADDITIONAL LIFTING POINT		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Level Ground Height 2m

Unlocked Road ALP Tandem

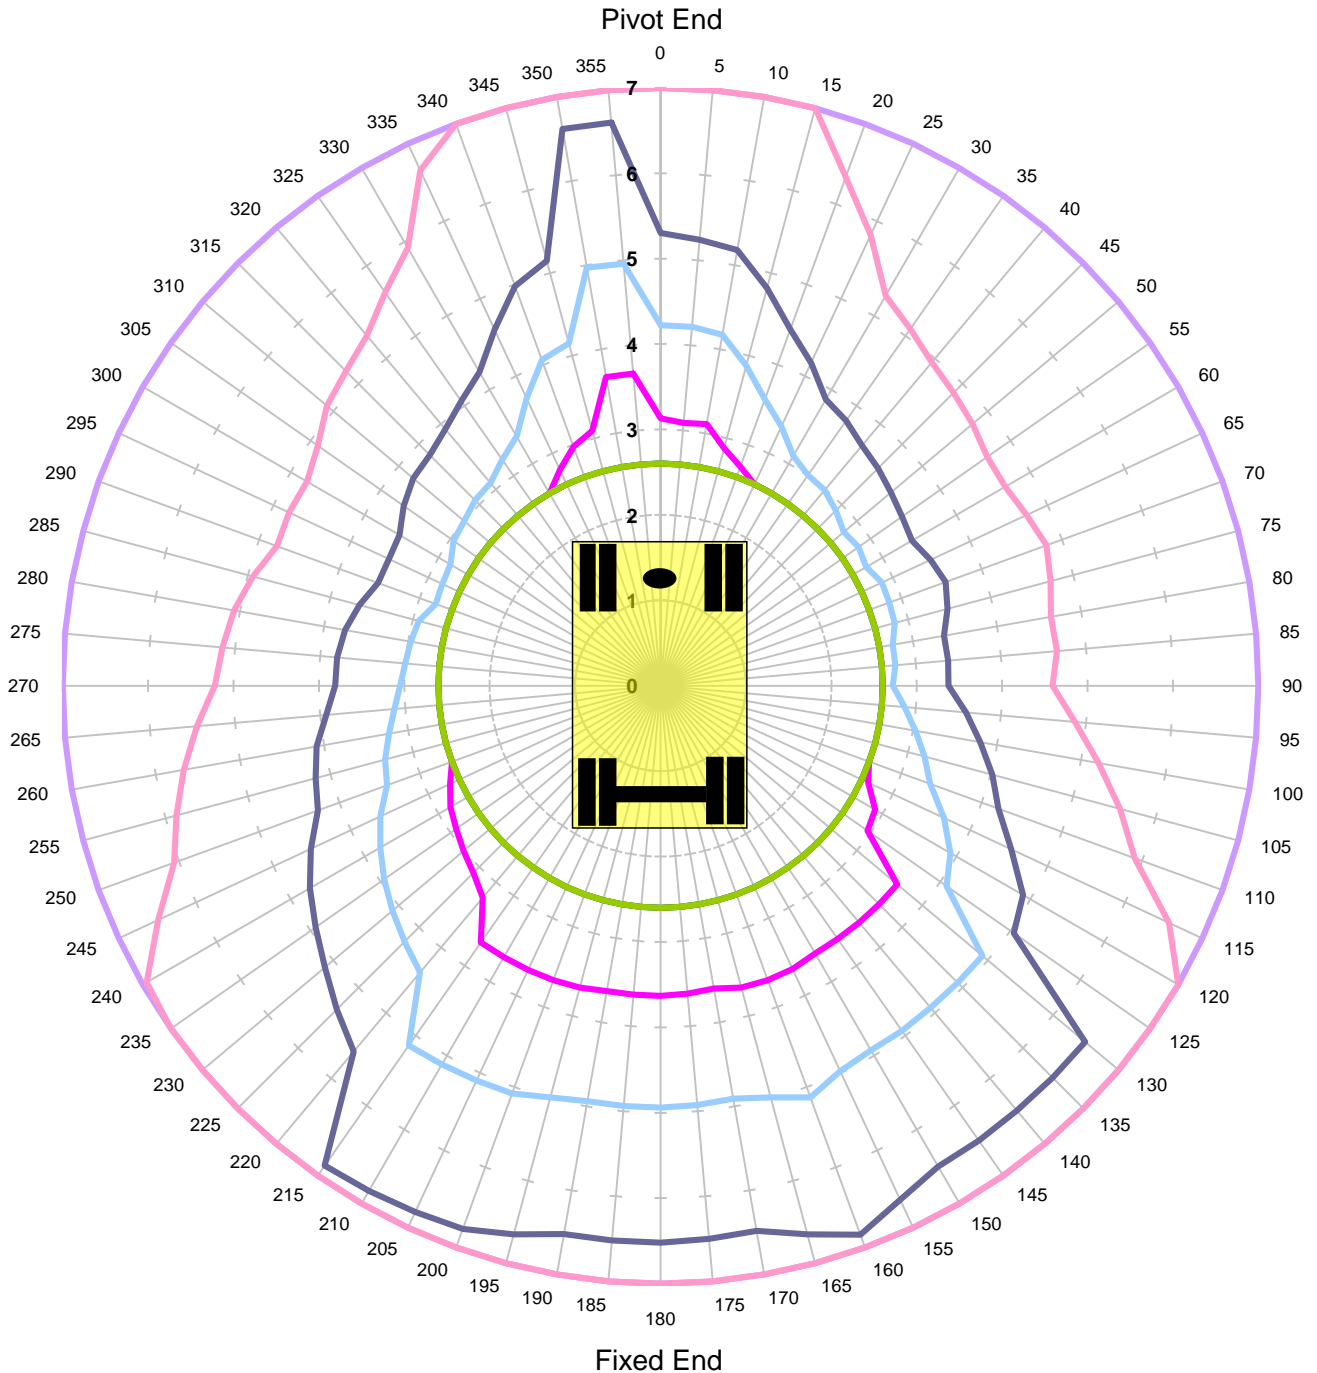

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	47.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, ADDITIONAL LIFTING POINT		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.10m Dipper
Level Ground Height 2m

Locked Road ALP Tandem

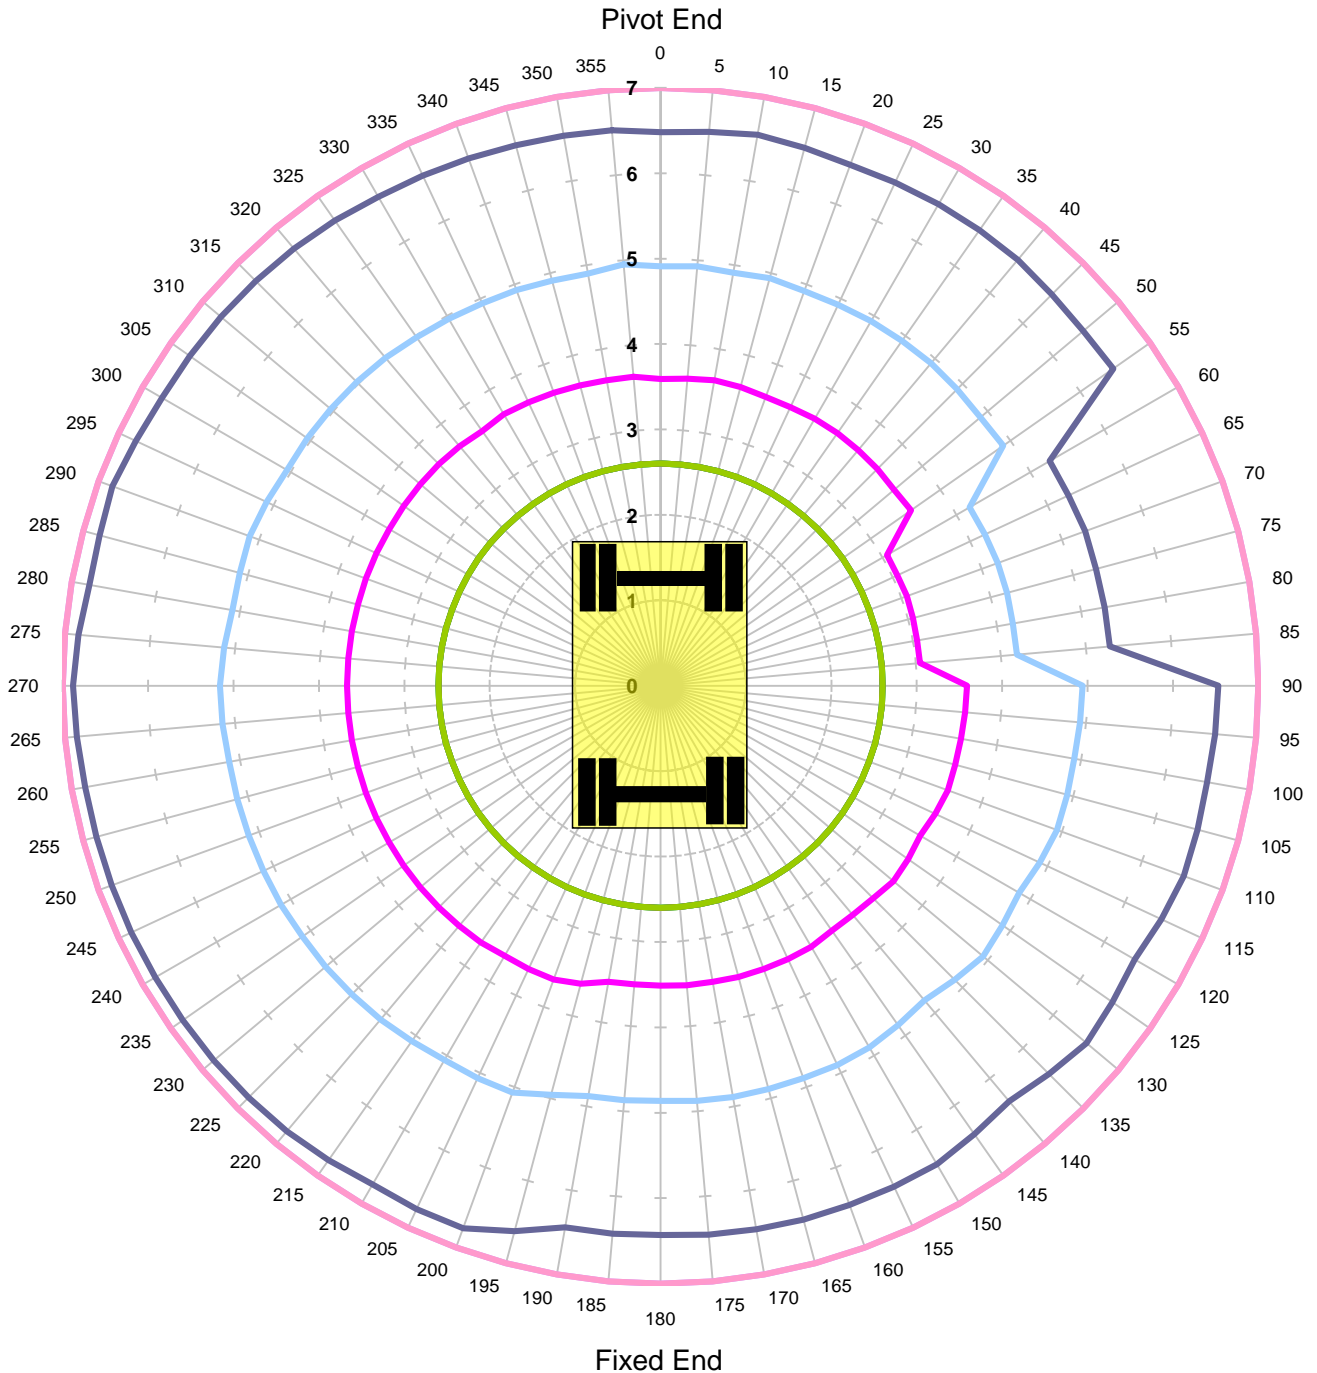

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	47.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, ADDITIONAL LIFTING POINT		