


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Unlocked Rail Cant -150mm

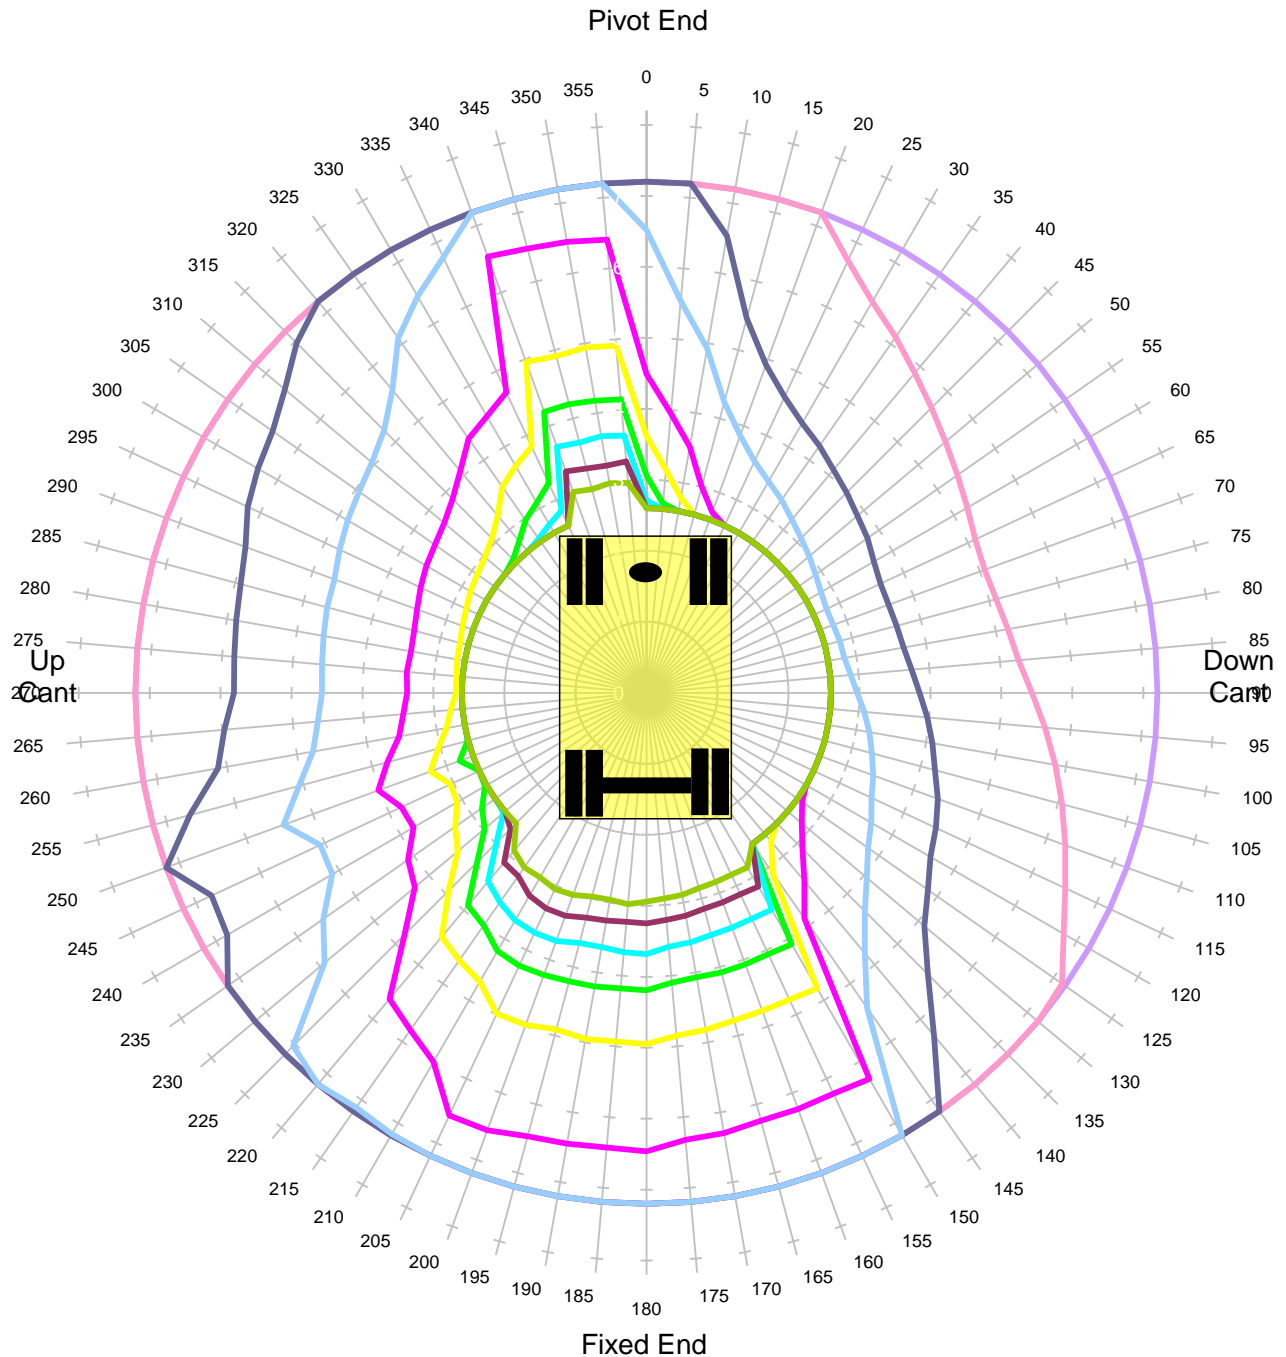

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	67.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, STANDARD LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Unlocked Rail Cant -50mm

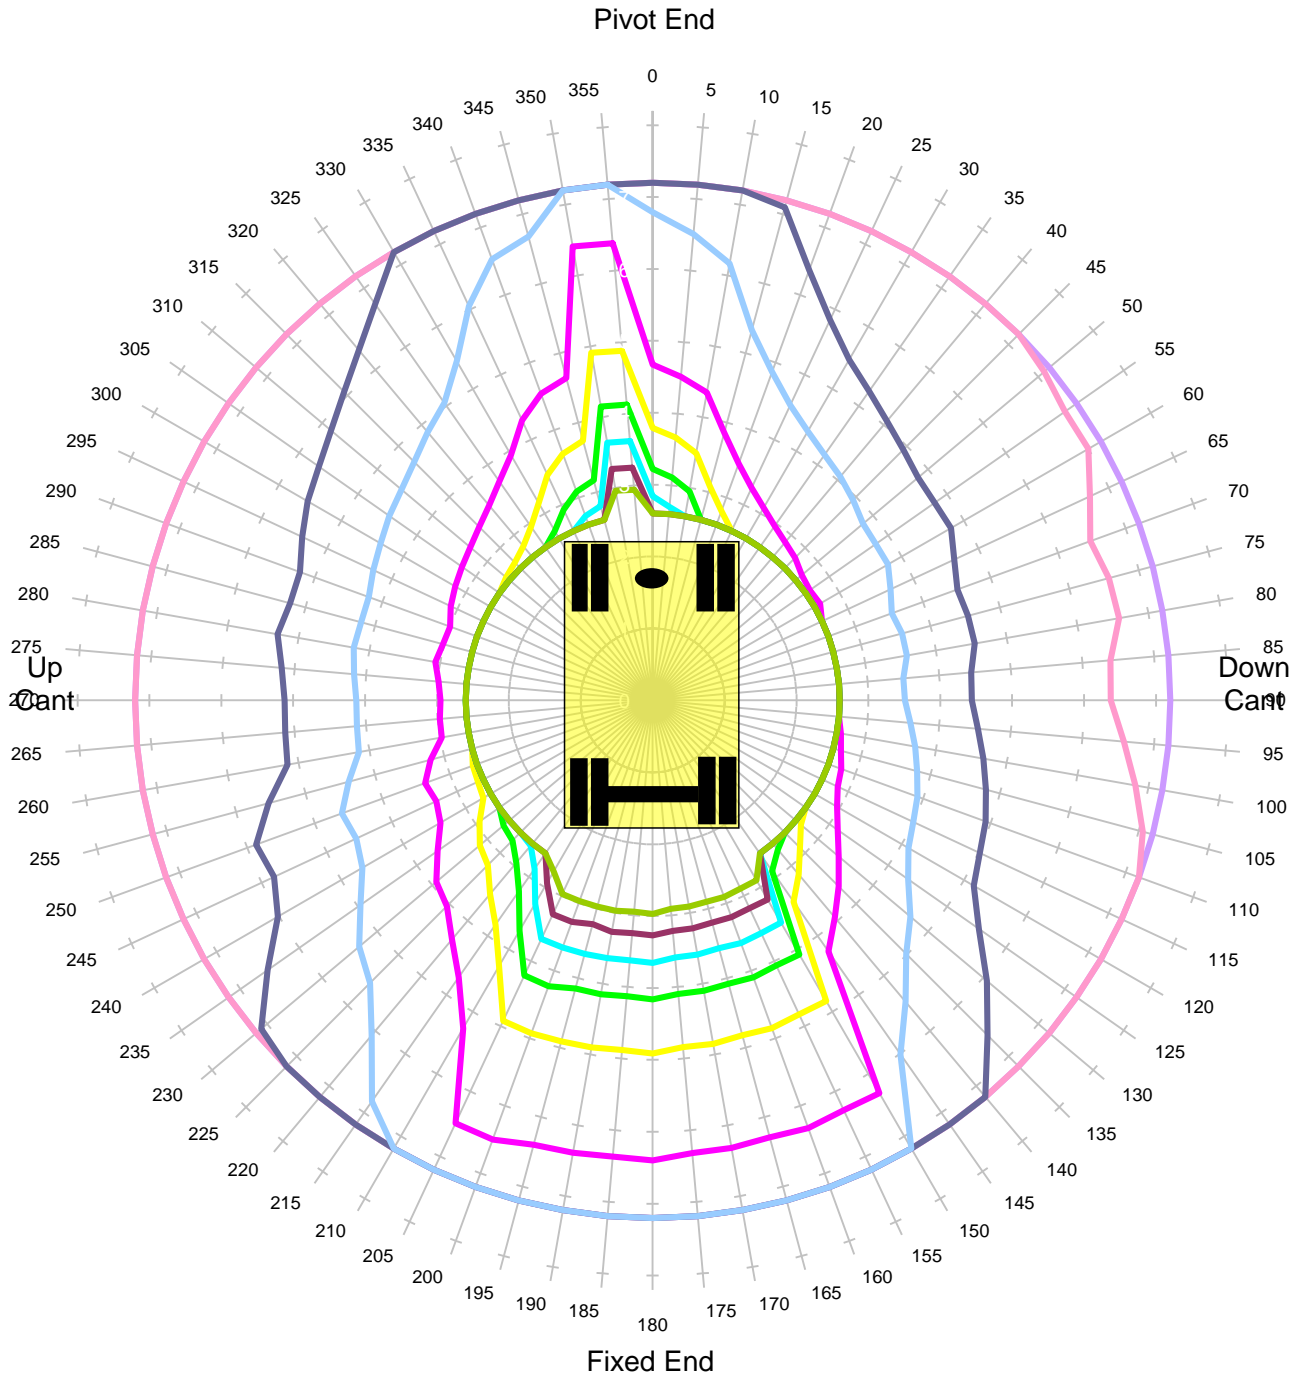

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	67.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, STANDARD LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Unlocked Rail Cant 50mm

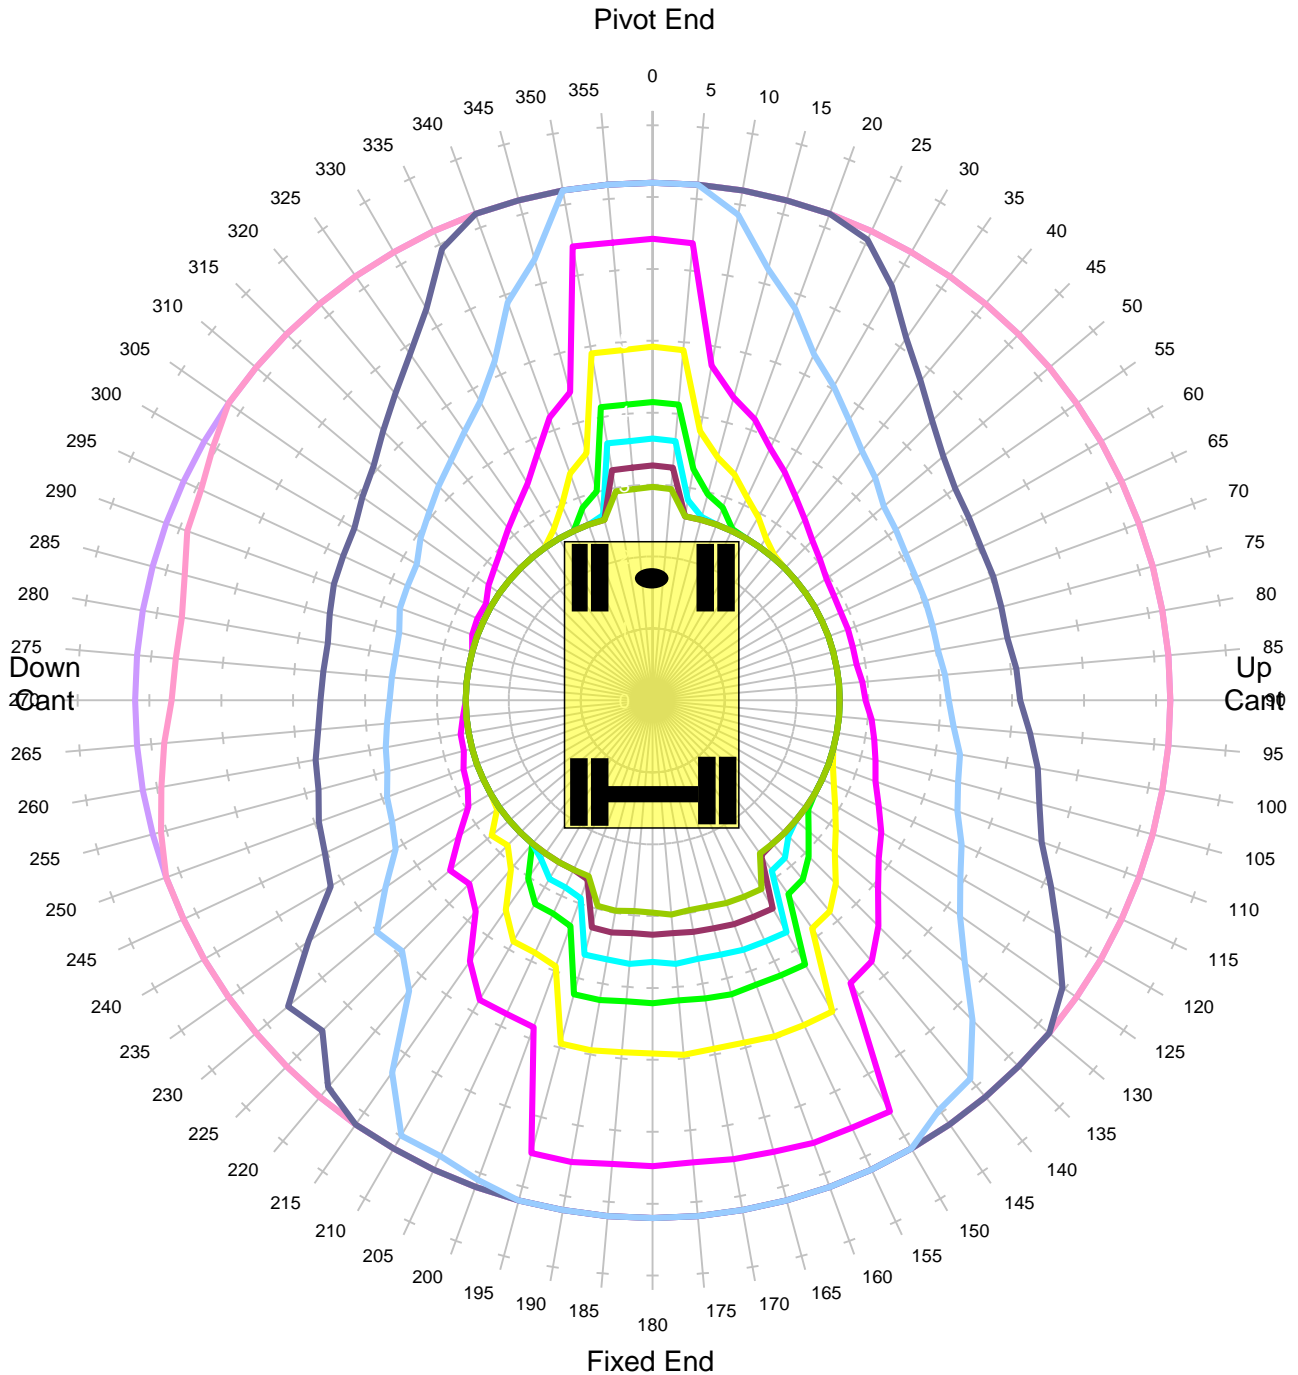

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	67.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, STANDARD LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Unlocked Rail Cant 150mm

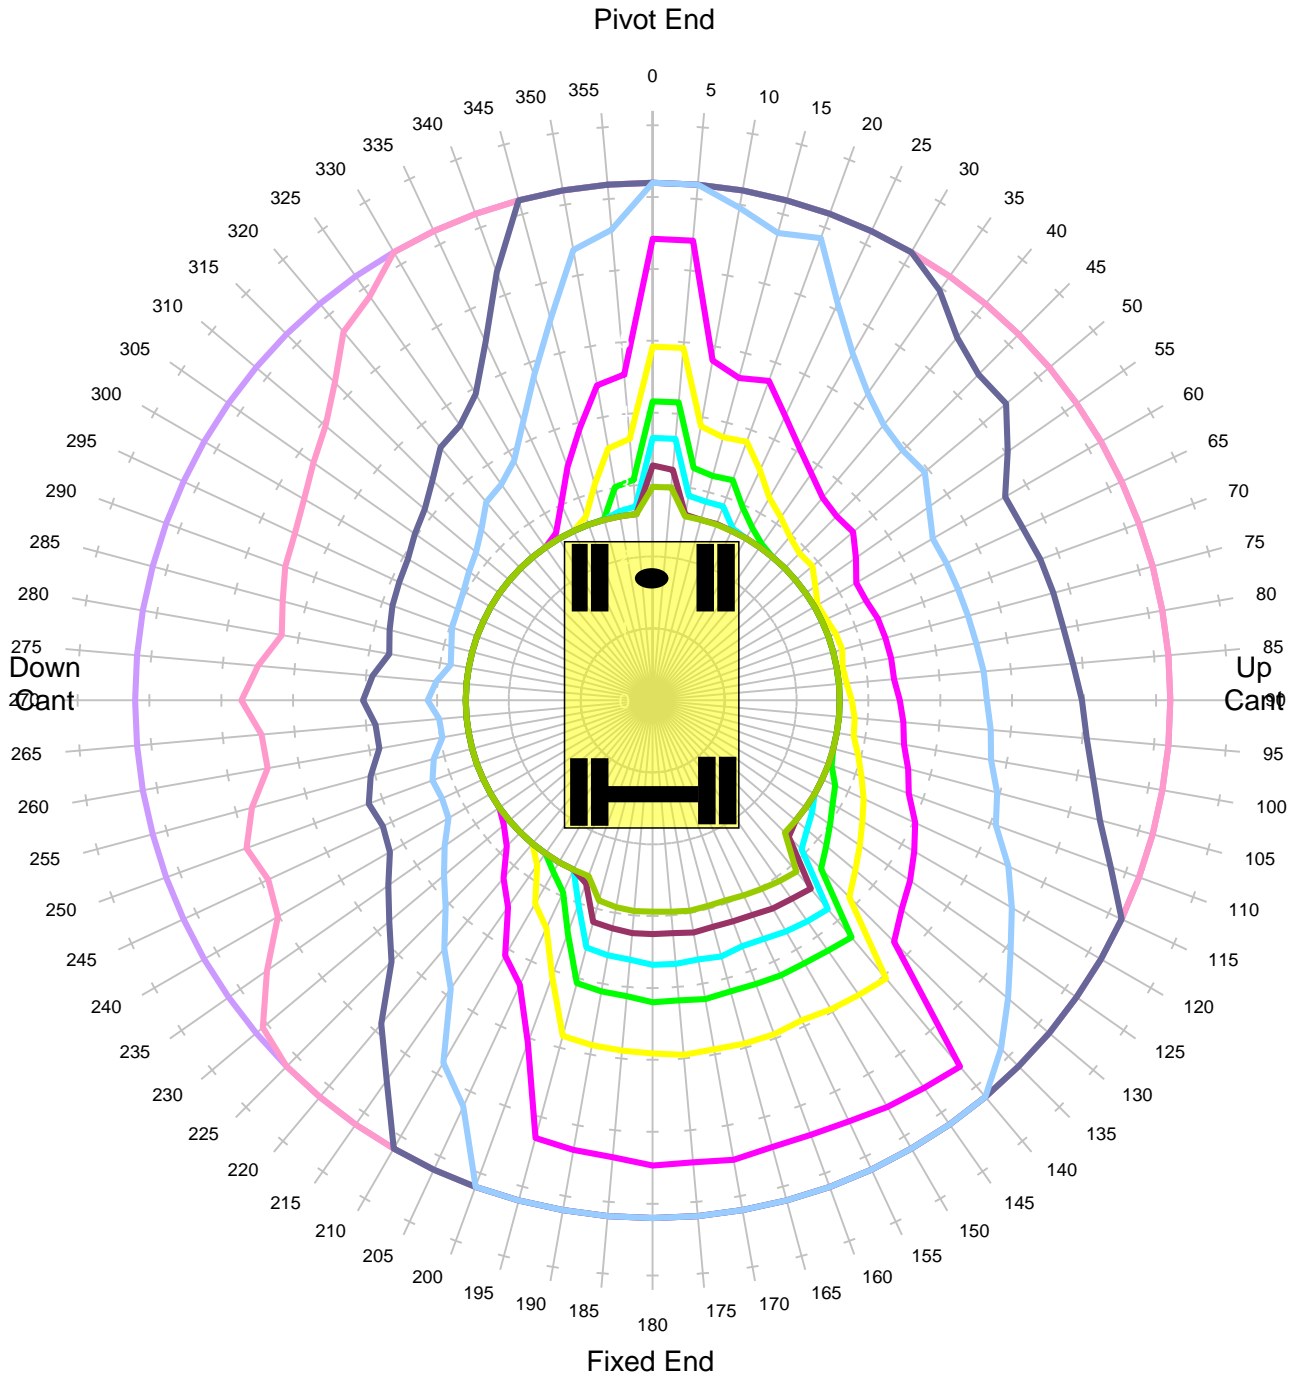

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	67.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, STANDARD LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Locked Rail Cant -150mm

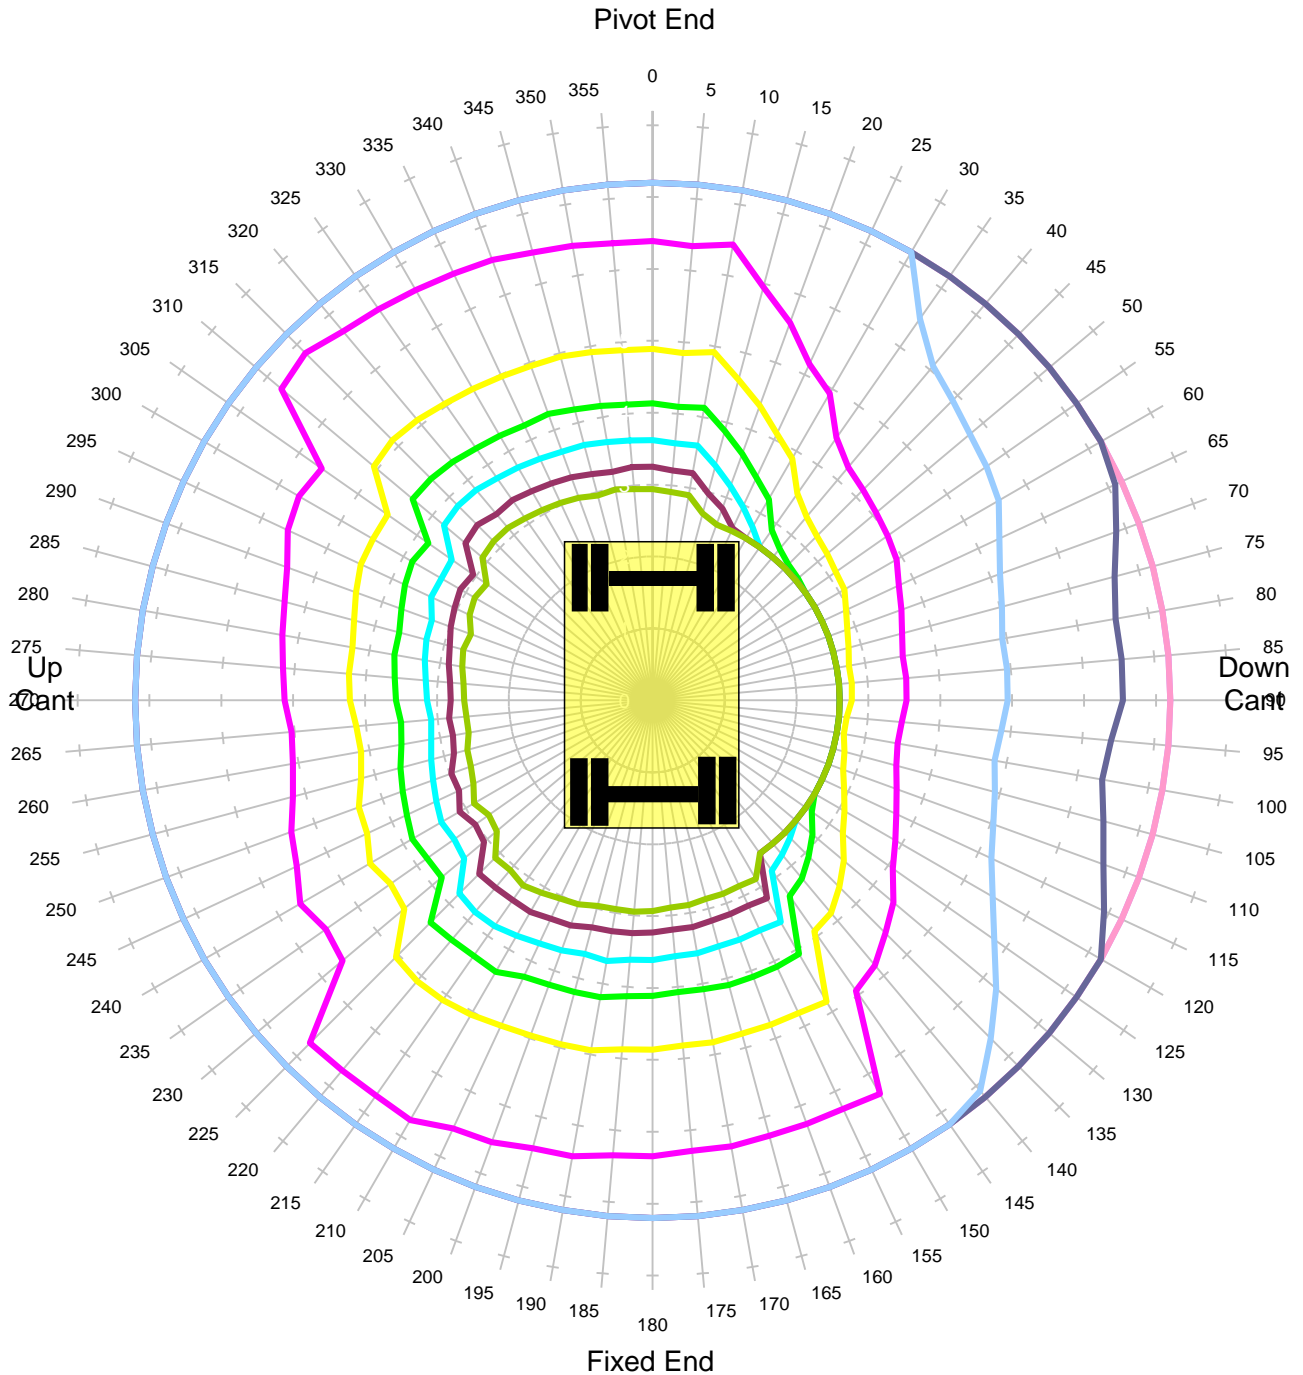

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, STANDARD LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Locked Rail Cant -50mm

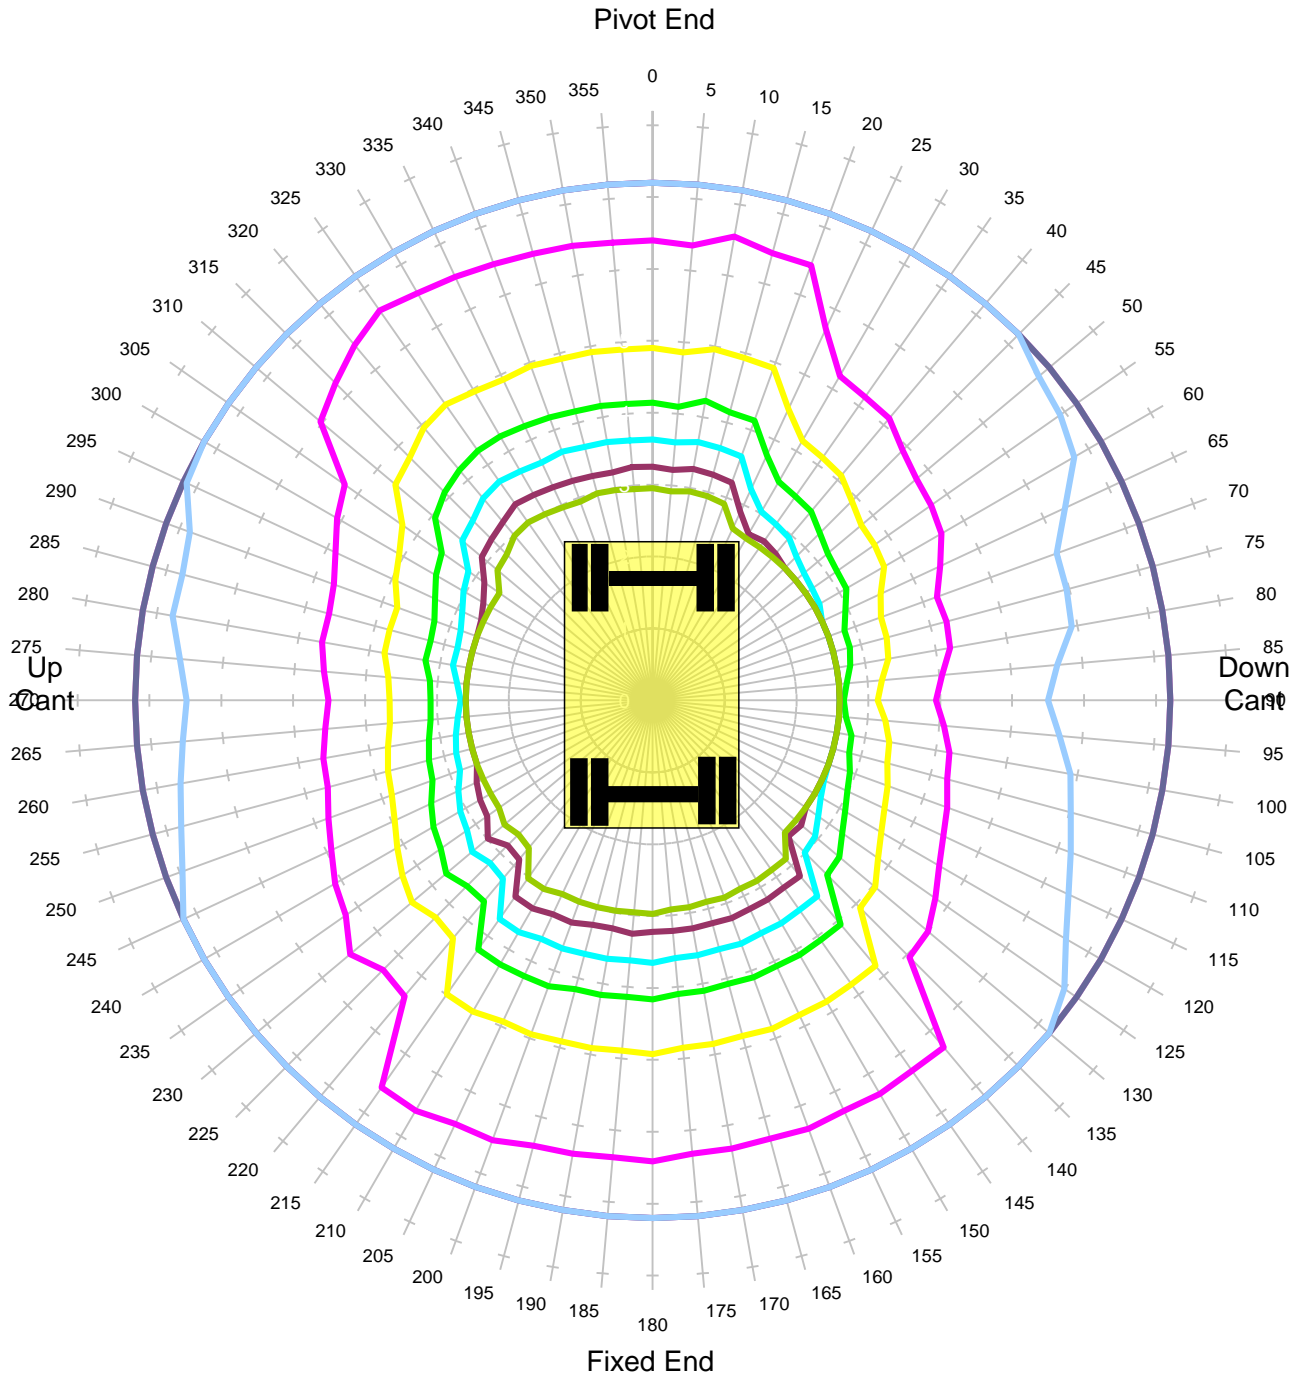

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, STANDARD LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -30 Height 2m

Locked Rail Cant 50mm

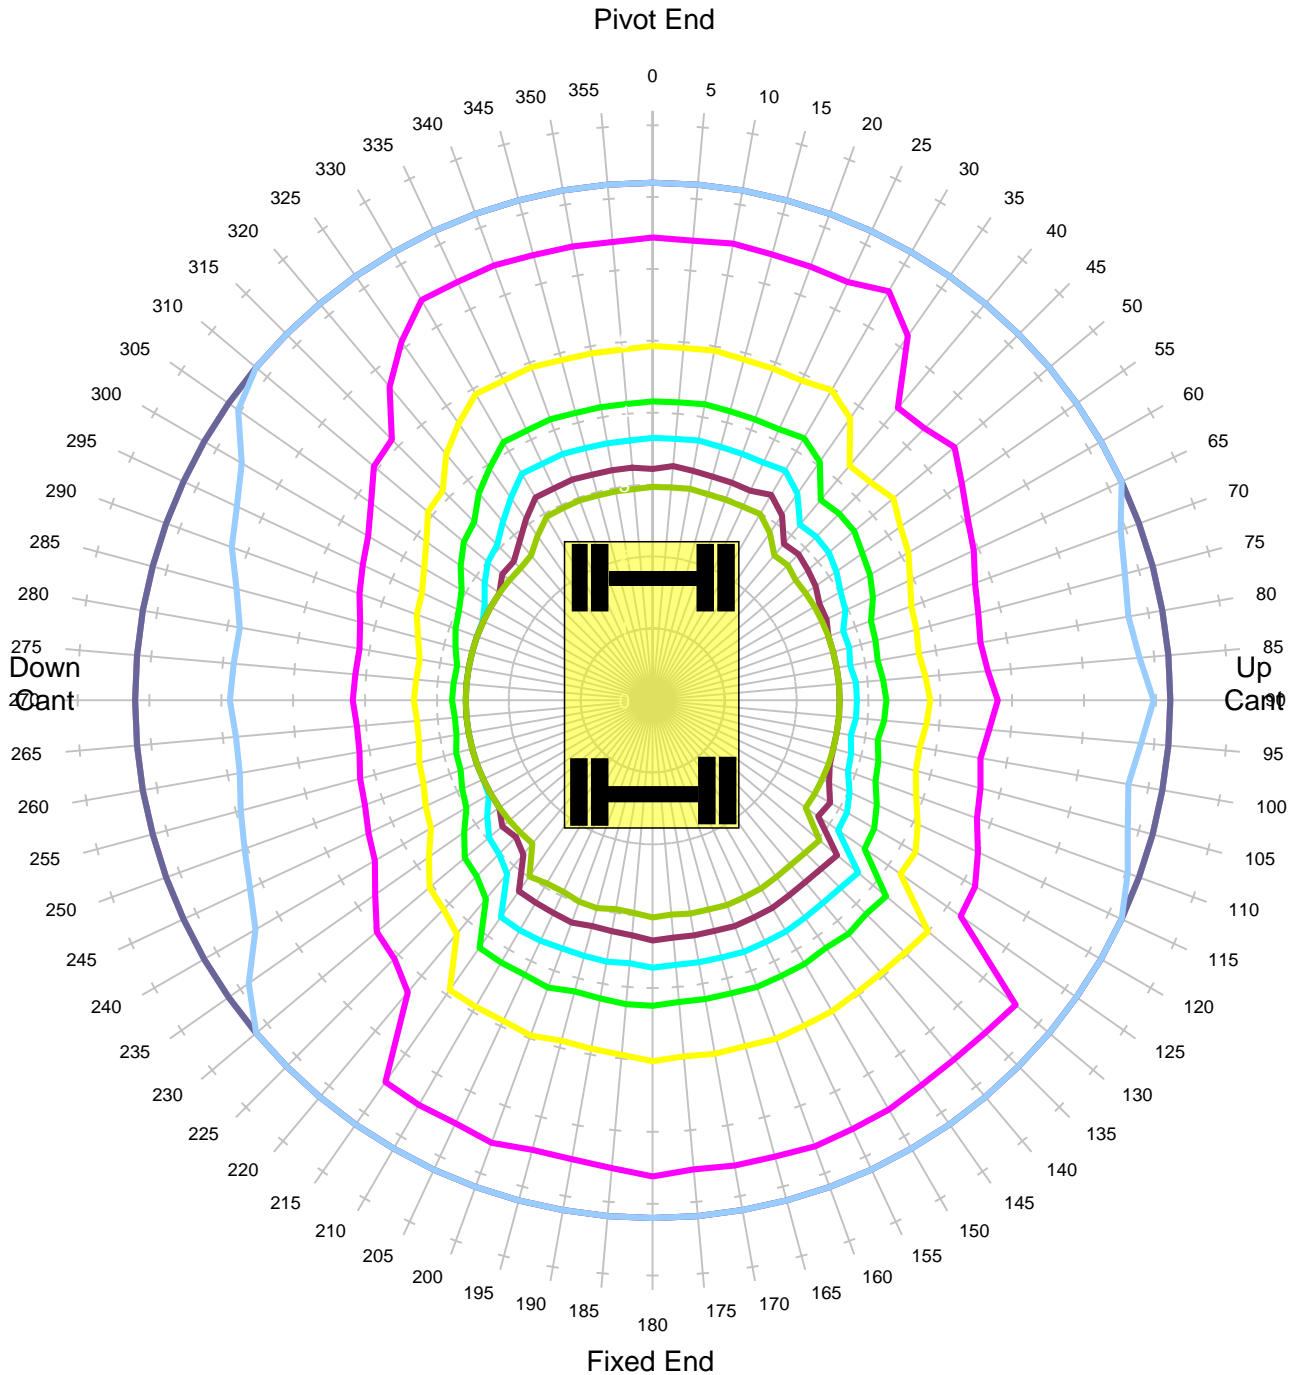

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, STANDARD LIFTING POINT		

GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Locked Rail Cant 150mm

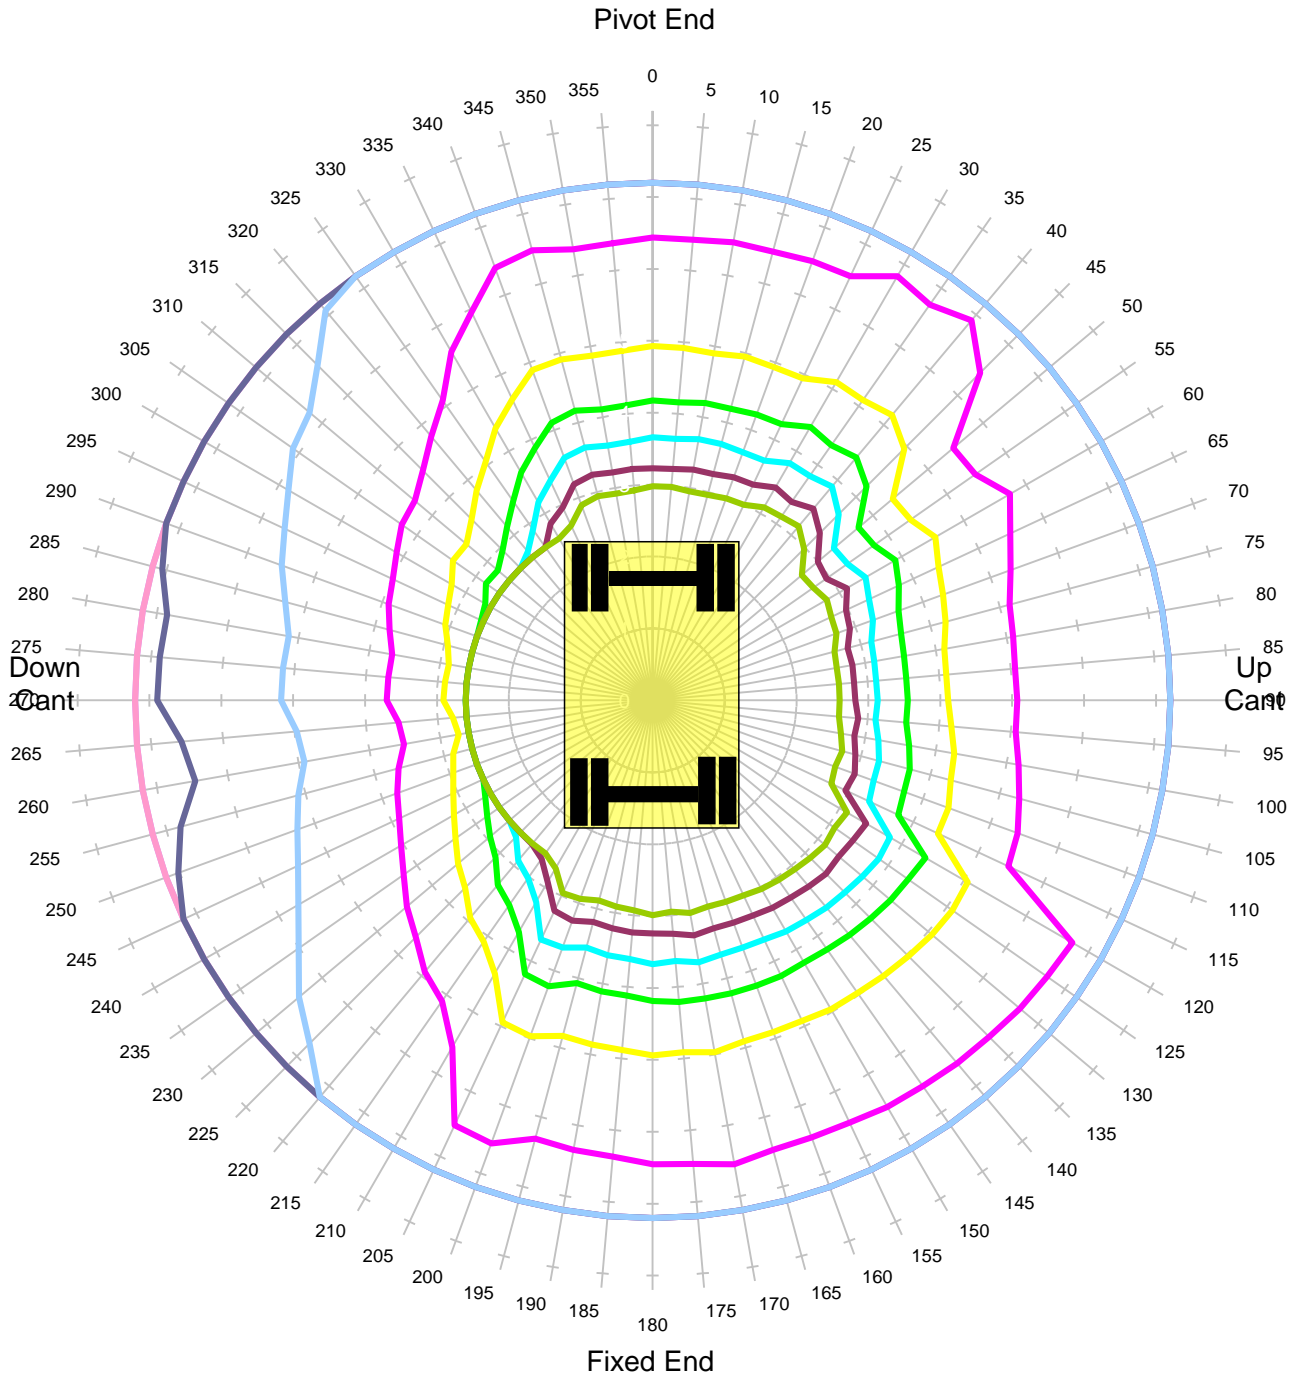

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, STANDARD LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Level Ground Height 2m

Unlocked Road

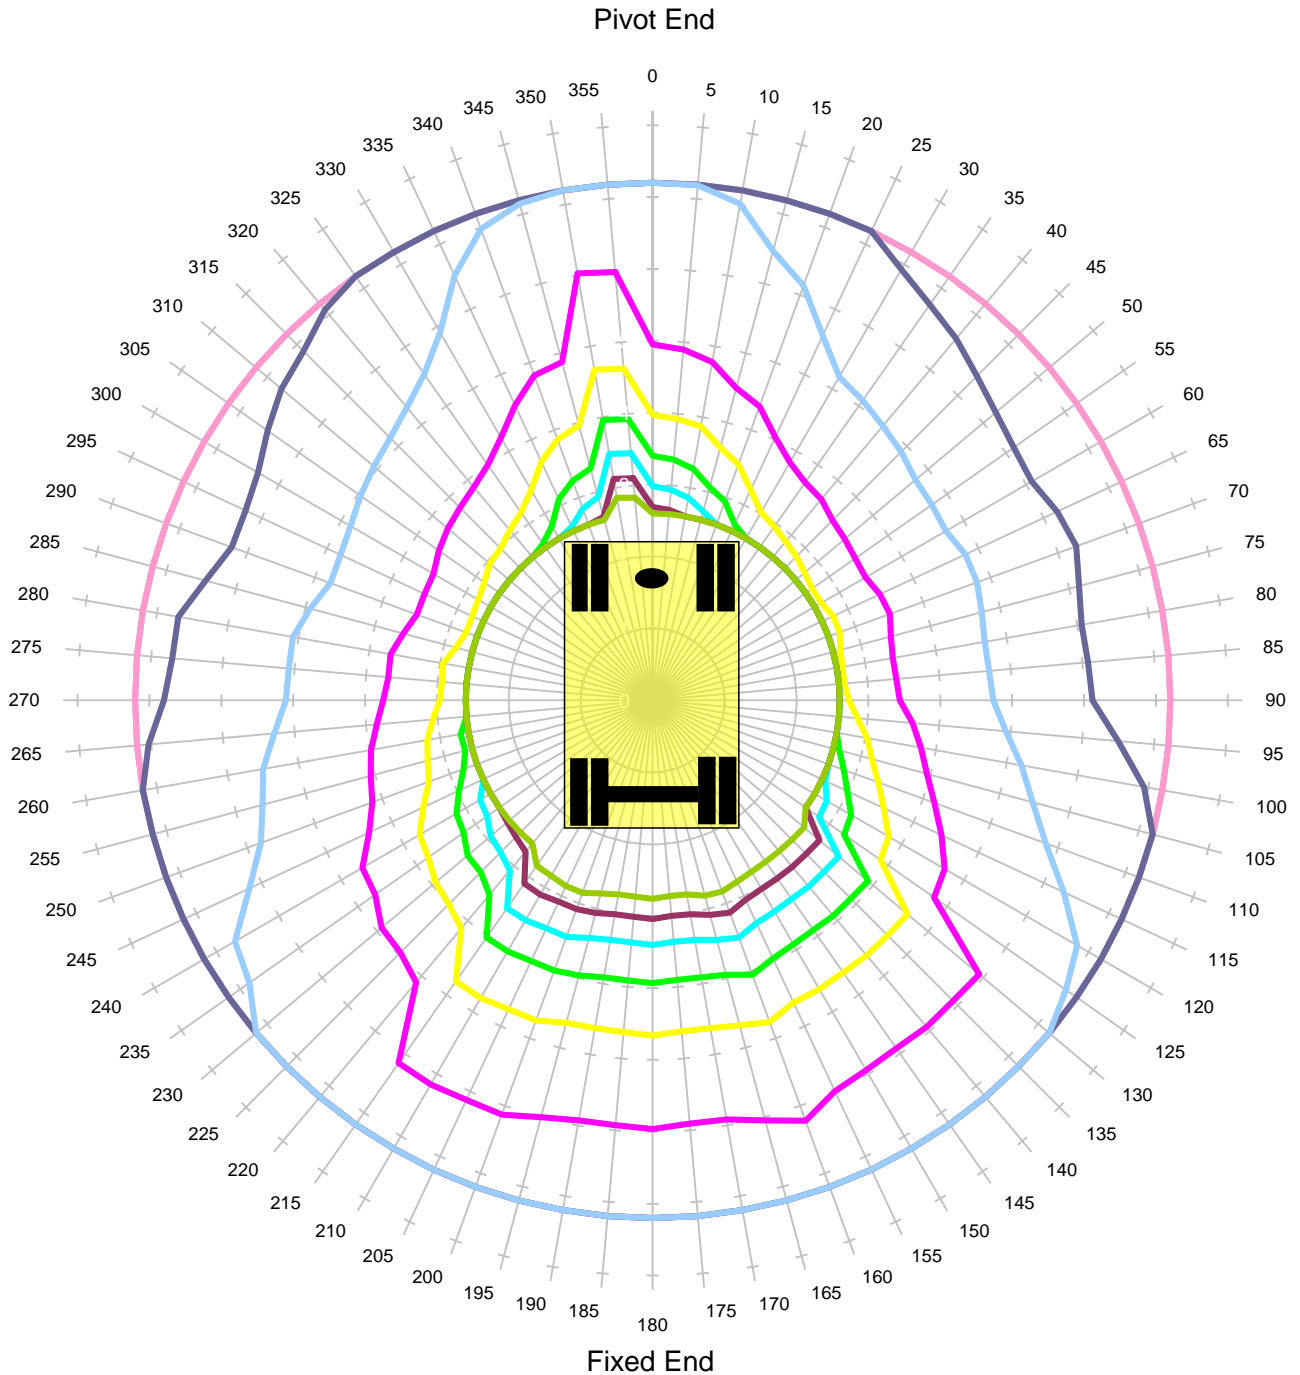

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	71.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, STANDARD LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Level Ground Height 2m

Locked Road

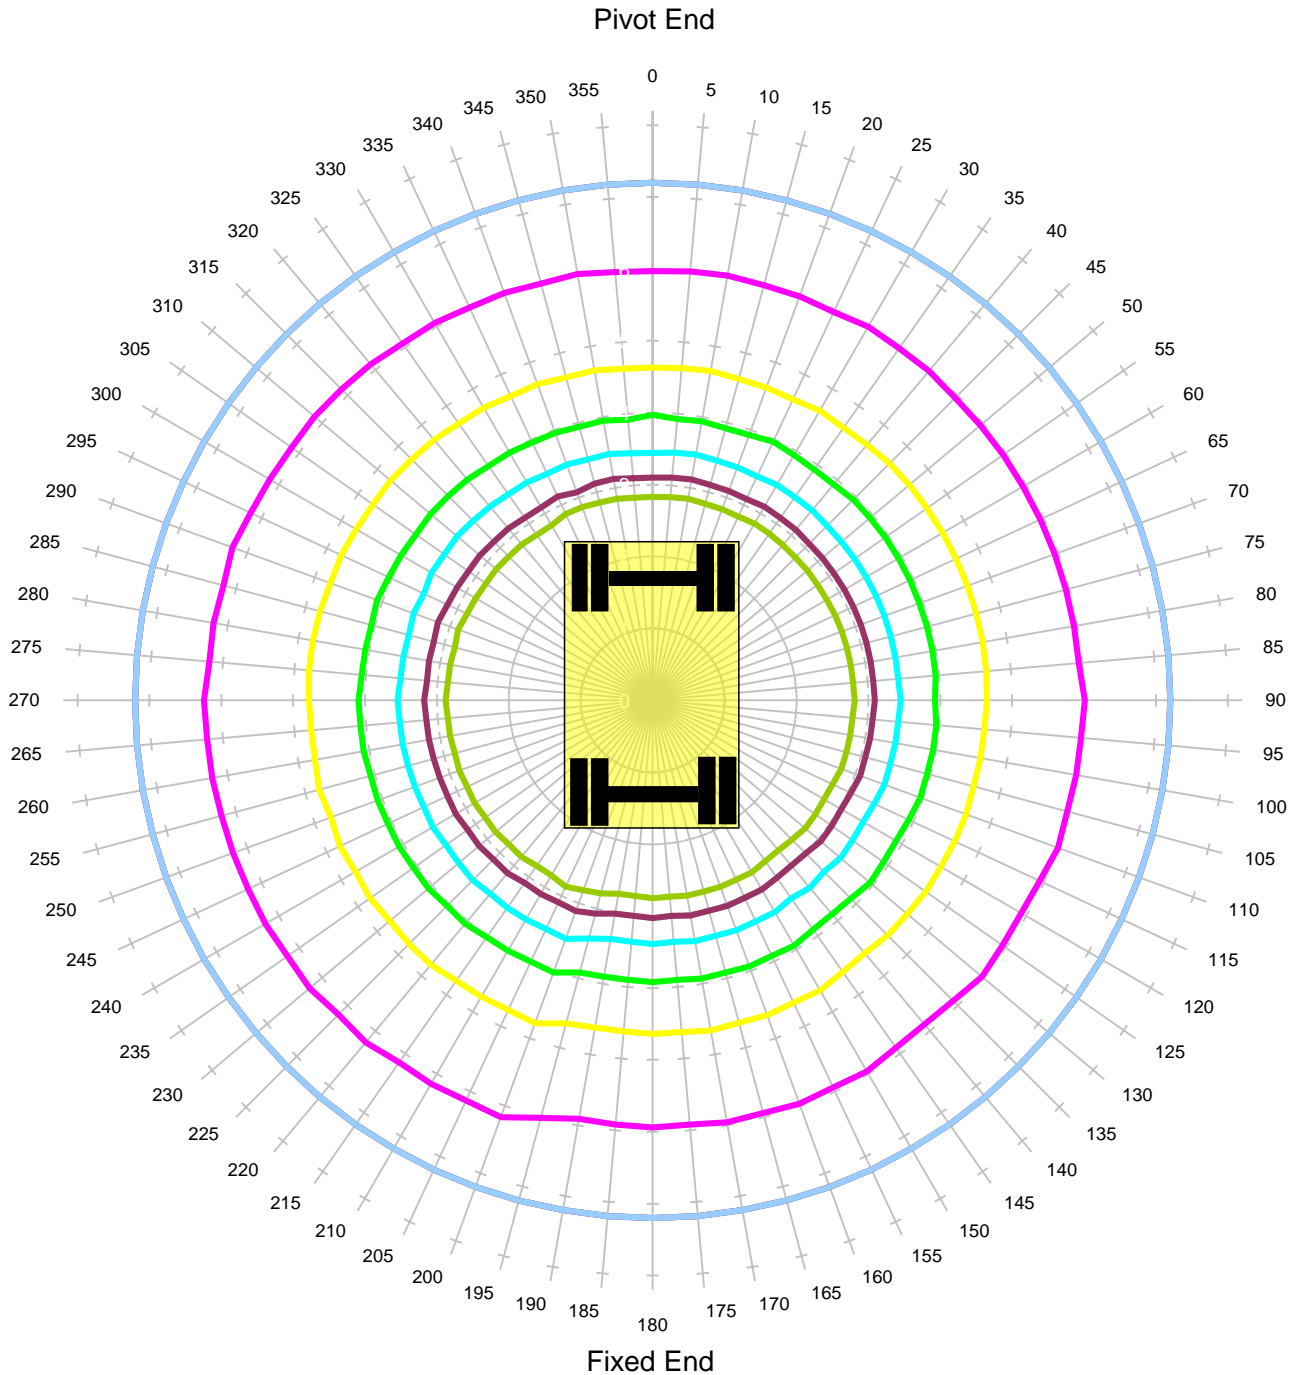

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	71.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, STANDARD LIFTING POINT		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Unlocked Rail Cant -150mm

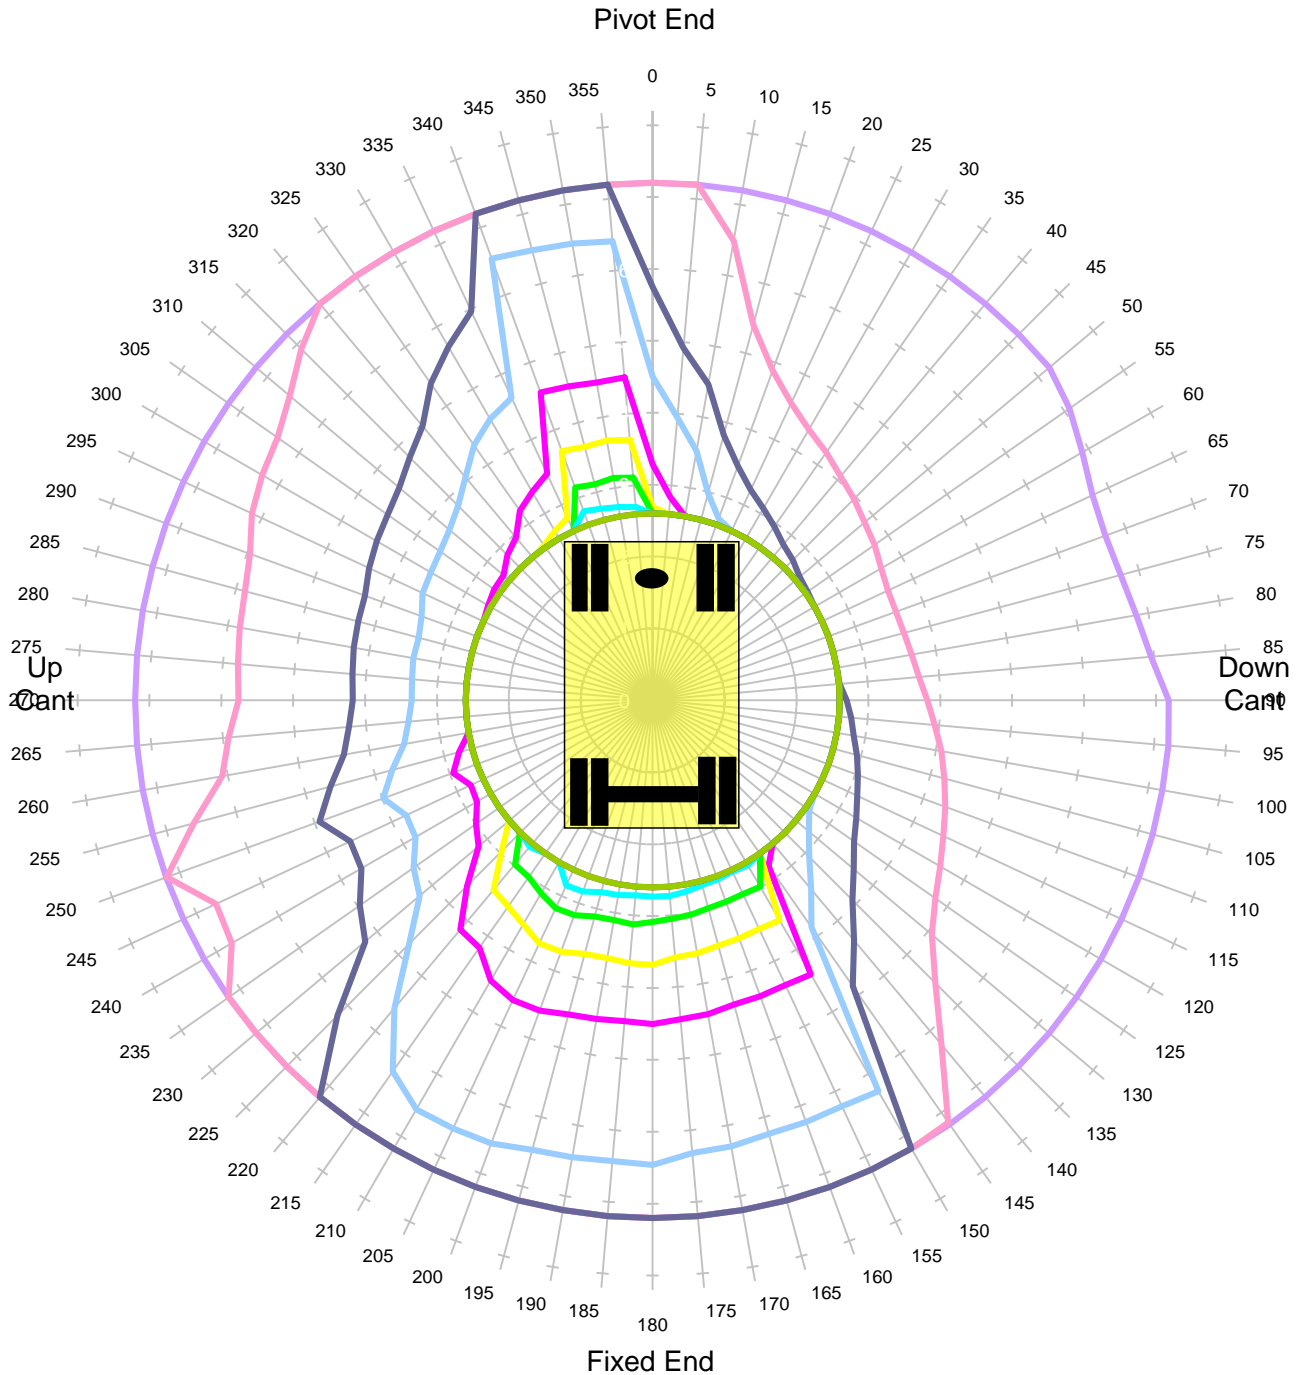

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	45.0%
COMMENT:	TYPE APPROVED, TANDEM LIFT MODE, STANDARD LIFTING POINT.		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Unlocked Rail Cant -50mm

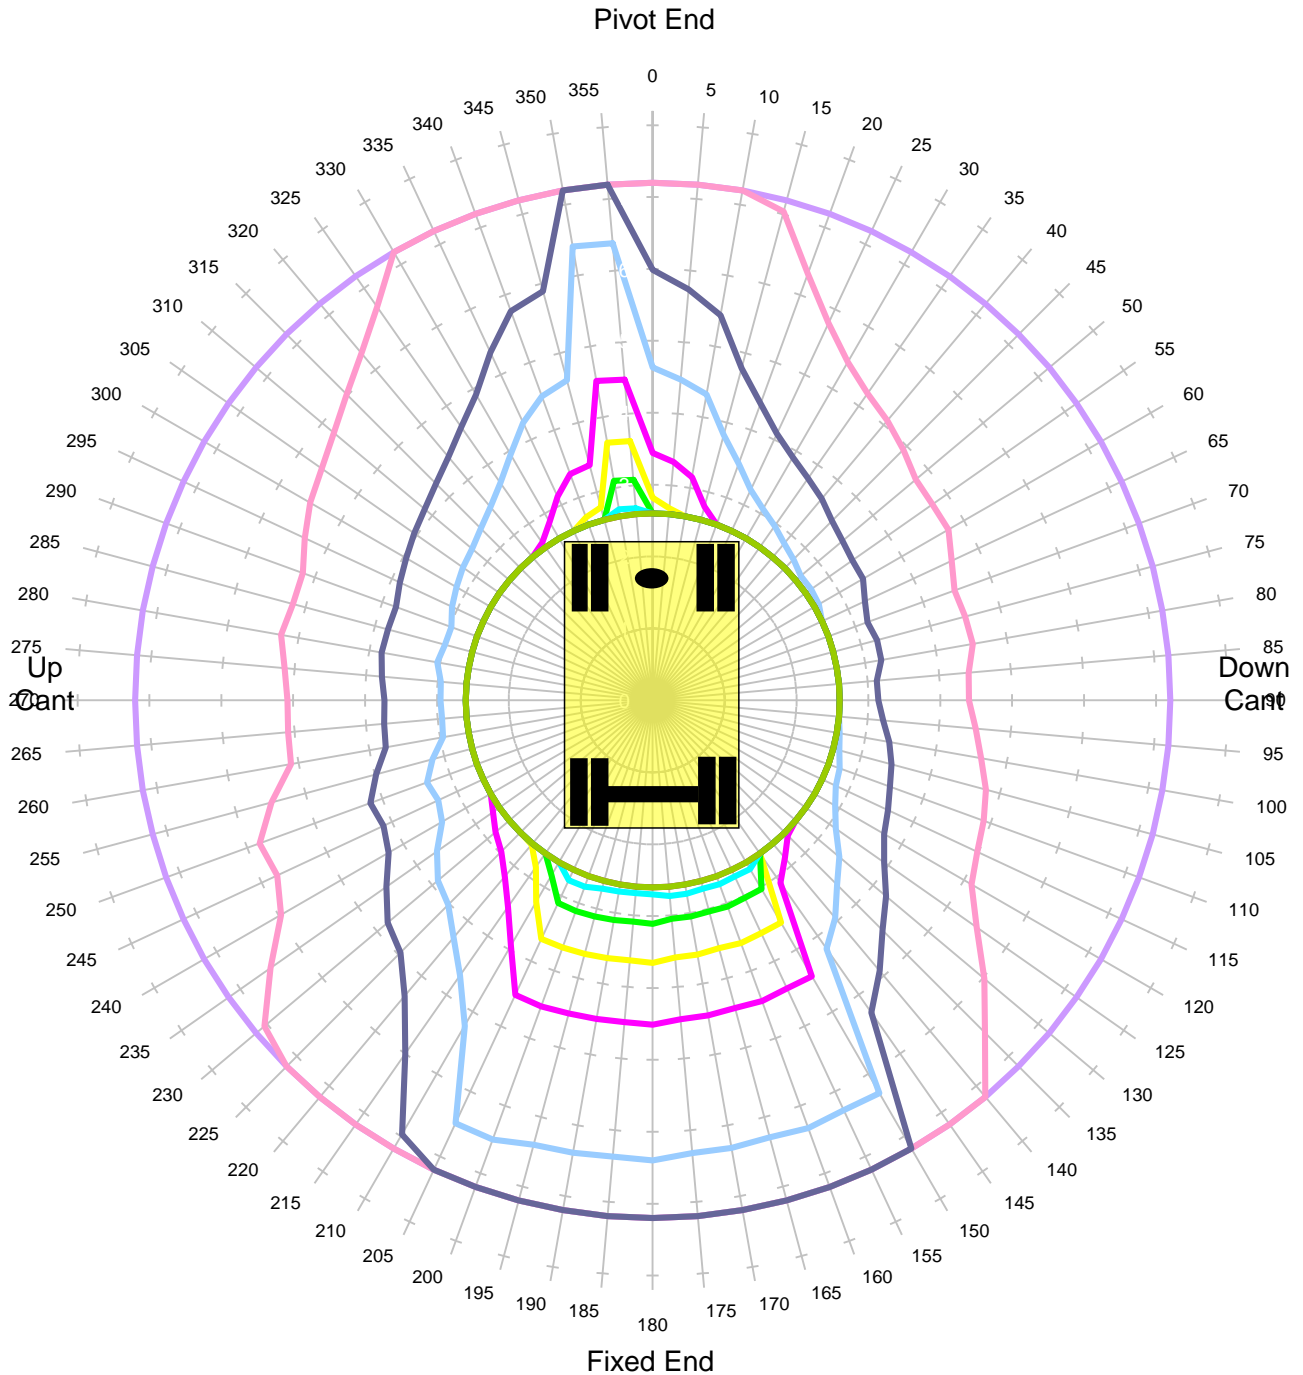

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	45.0%
COMMENT:	TYPE APPROVED, TANDEM LIFT MODE, STANDARD LIFTING POINT.		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Unlocked Rail Cant 50mm

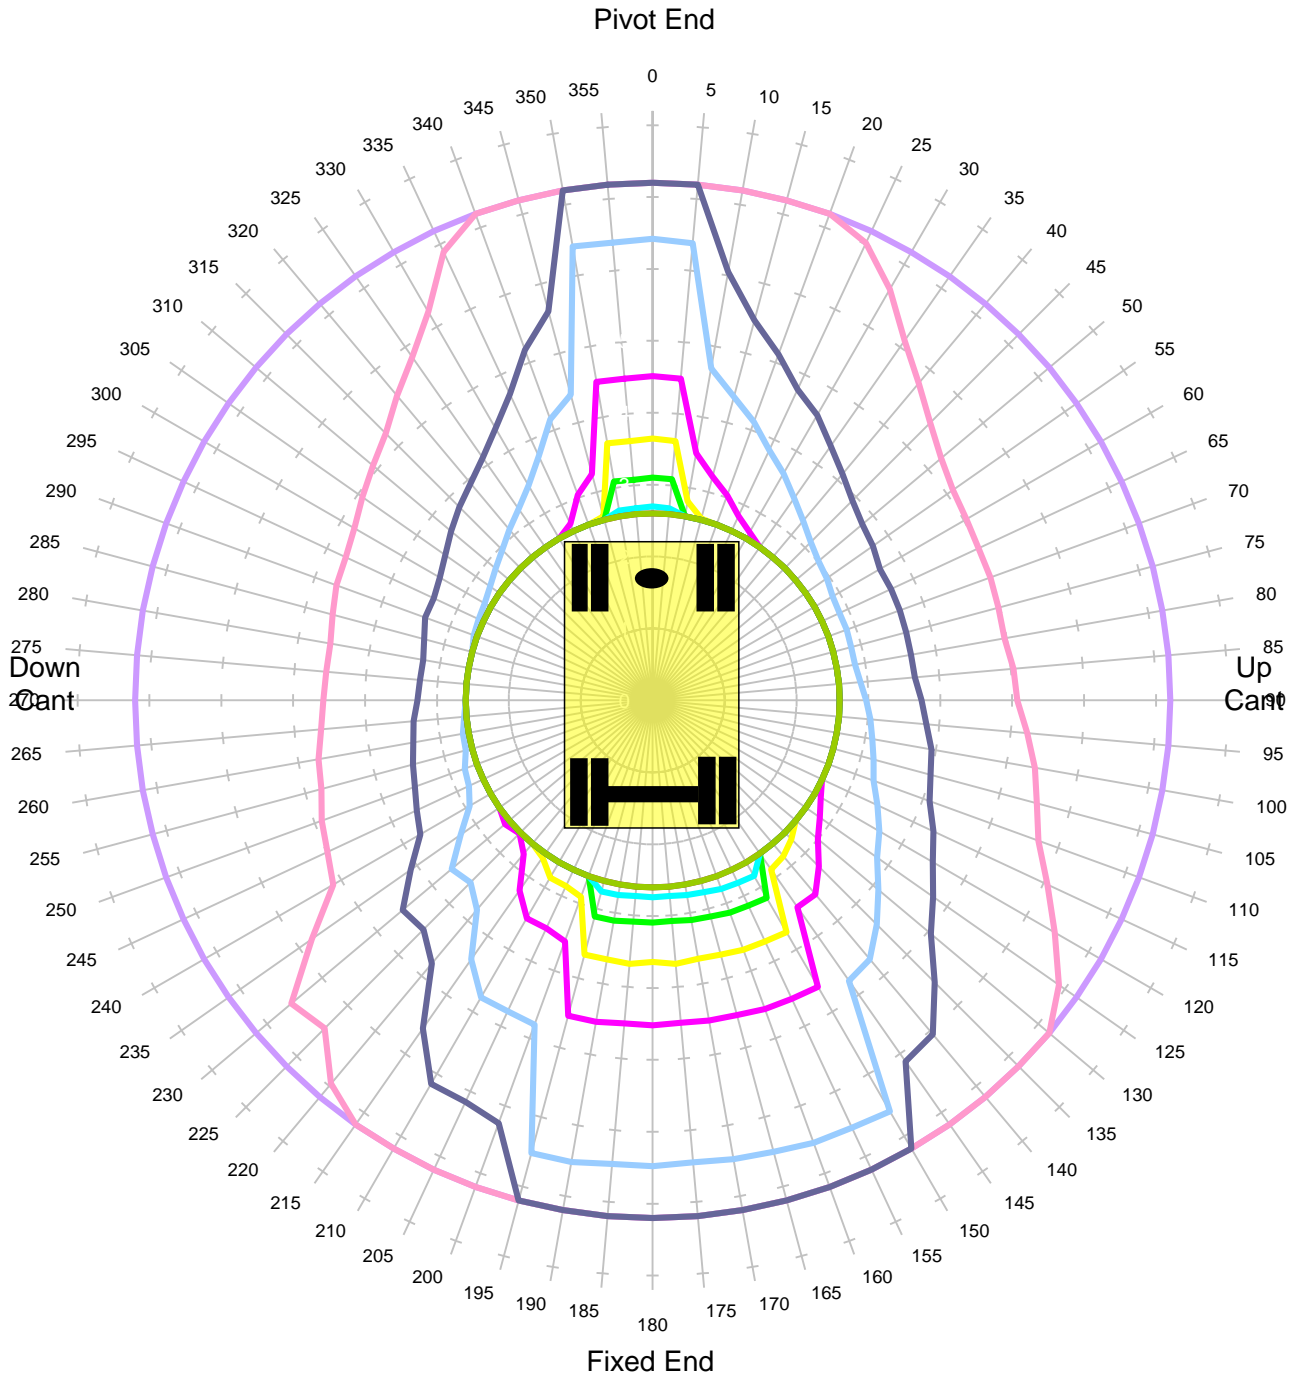

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	45.0%
COMMENT:	TYPE APPROVED, TANDEM LIFT MODE, STANDARD LIFTING POINT.		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Unlocked Rail Cant 150mm

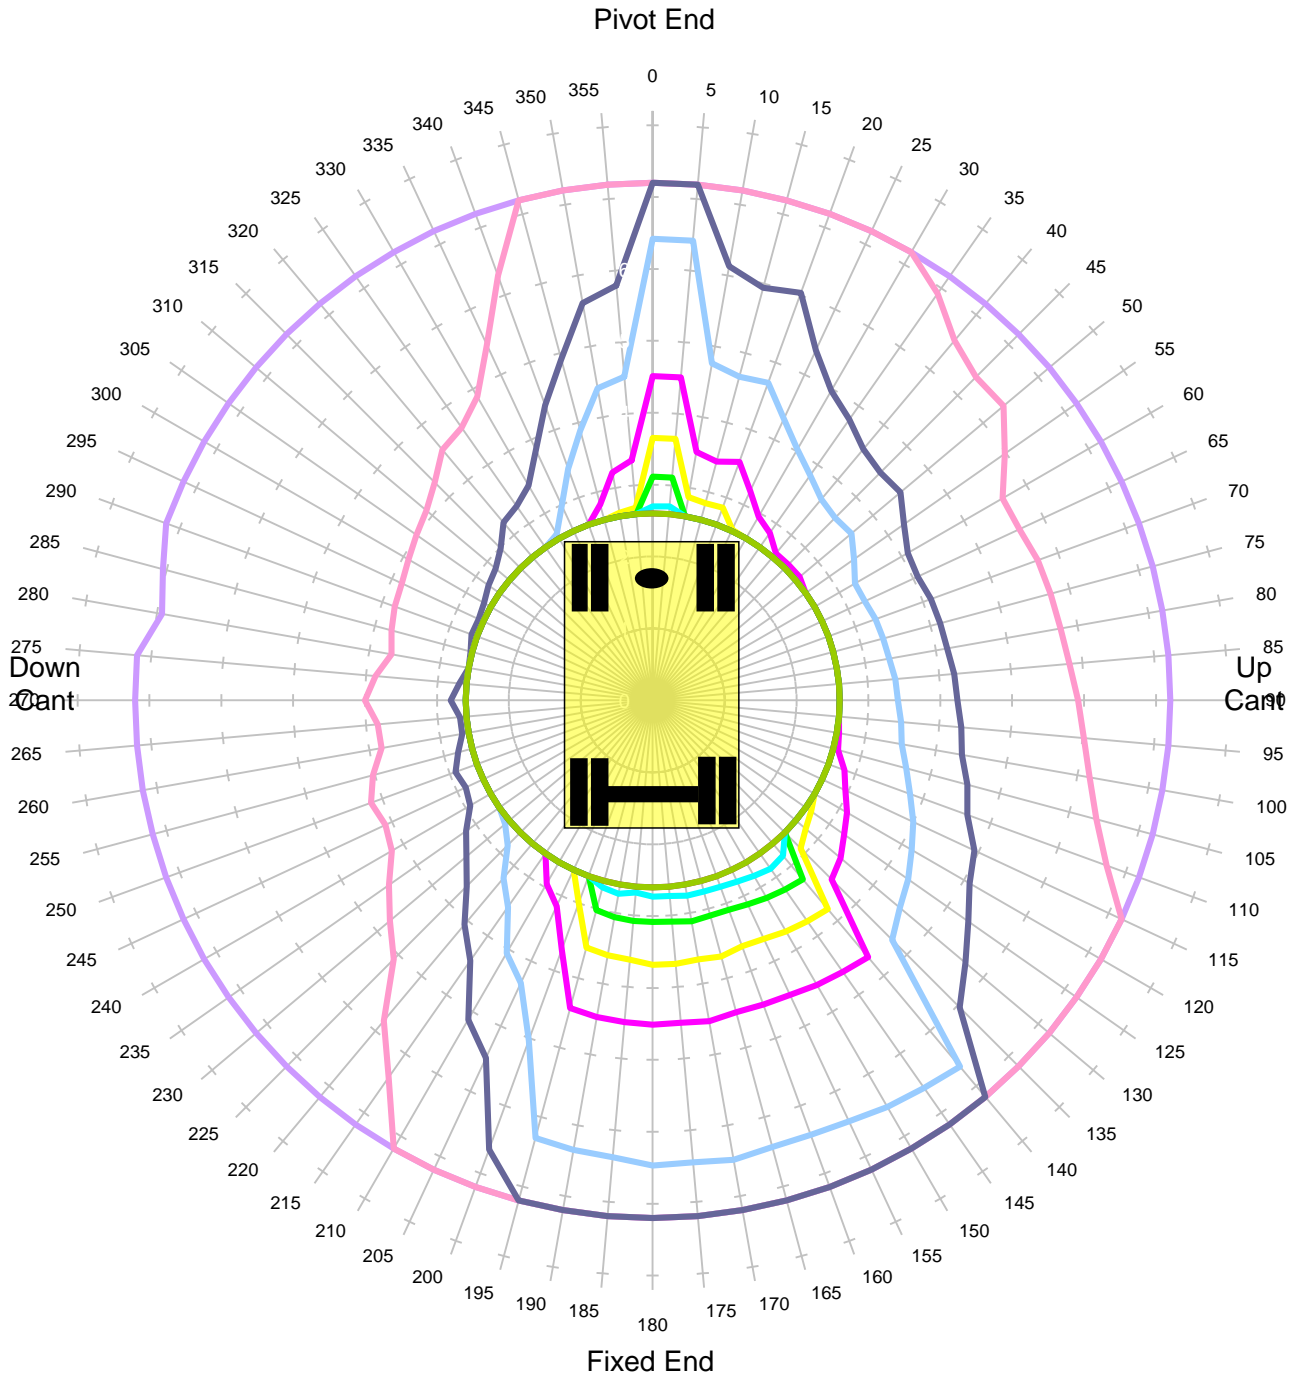

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	45.0%
COMMENT:	TYPE APPROVED, TANDEM LIFT MODE, STANDARD LIFTING POINT.		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Locked Rail Cant -150mm

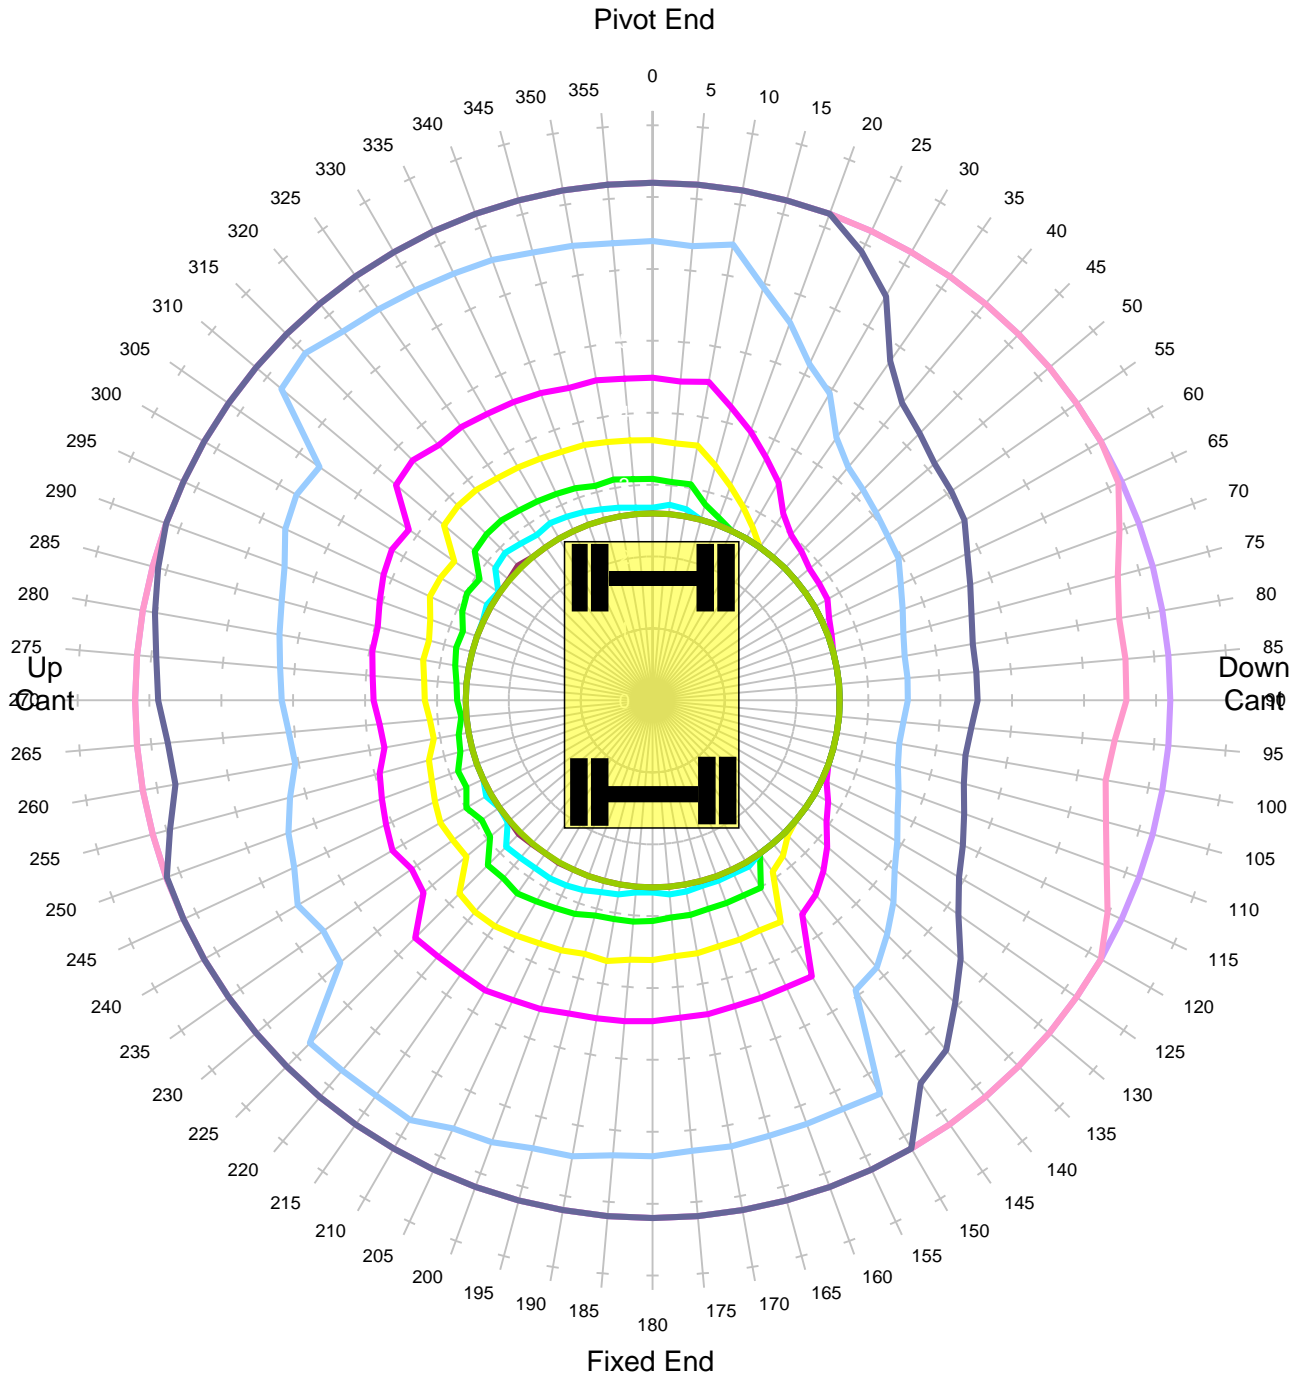

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM LIFT MODE, STANDARD LIFTING POINT.		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Locked Rail Cant -50mm

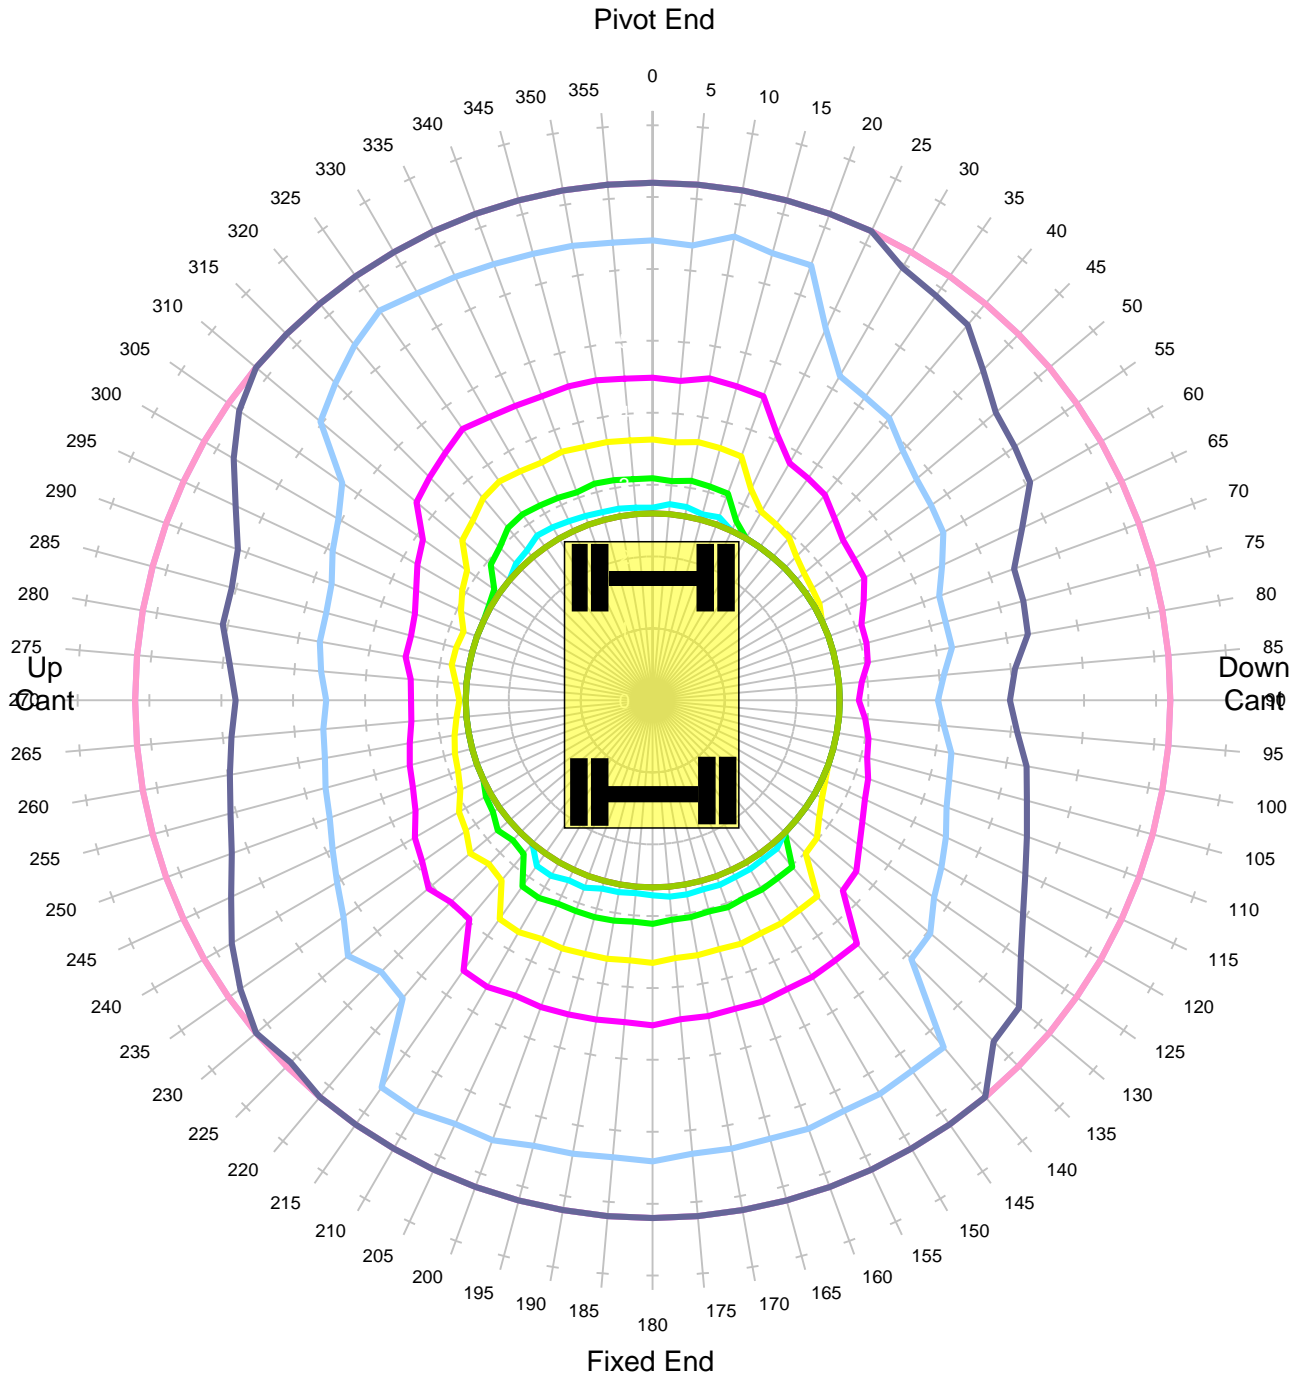

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM LIFT MODE, STANDARD LIFTING POINT.		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Locked Rail Cant 50mm

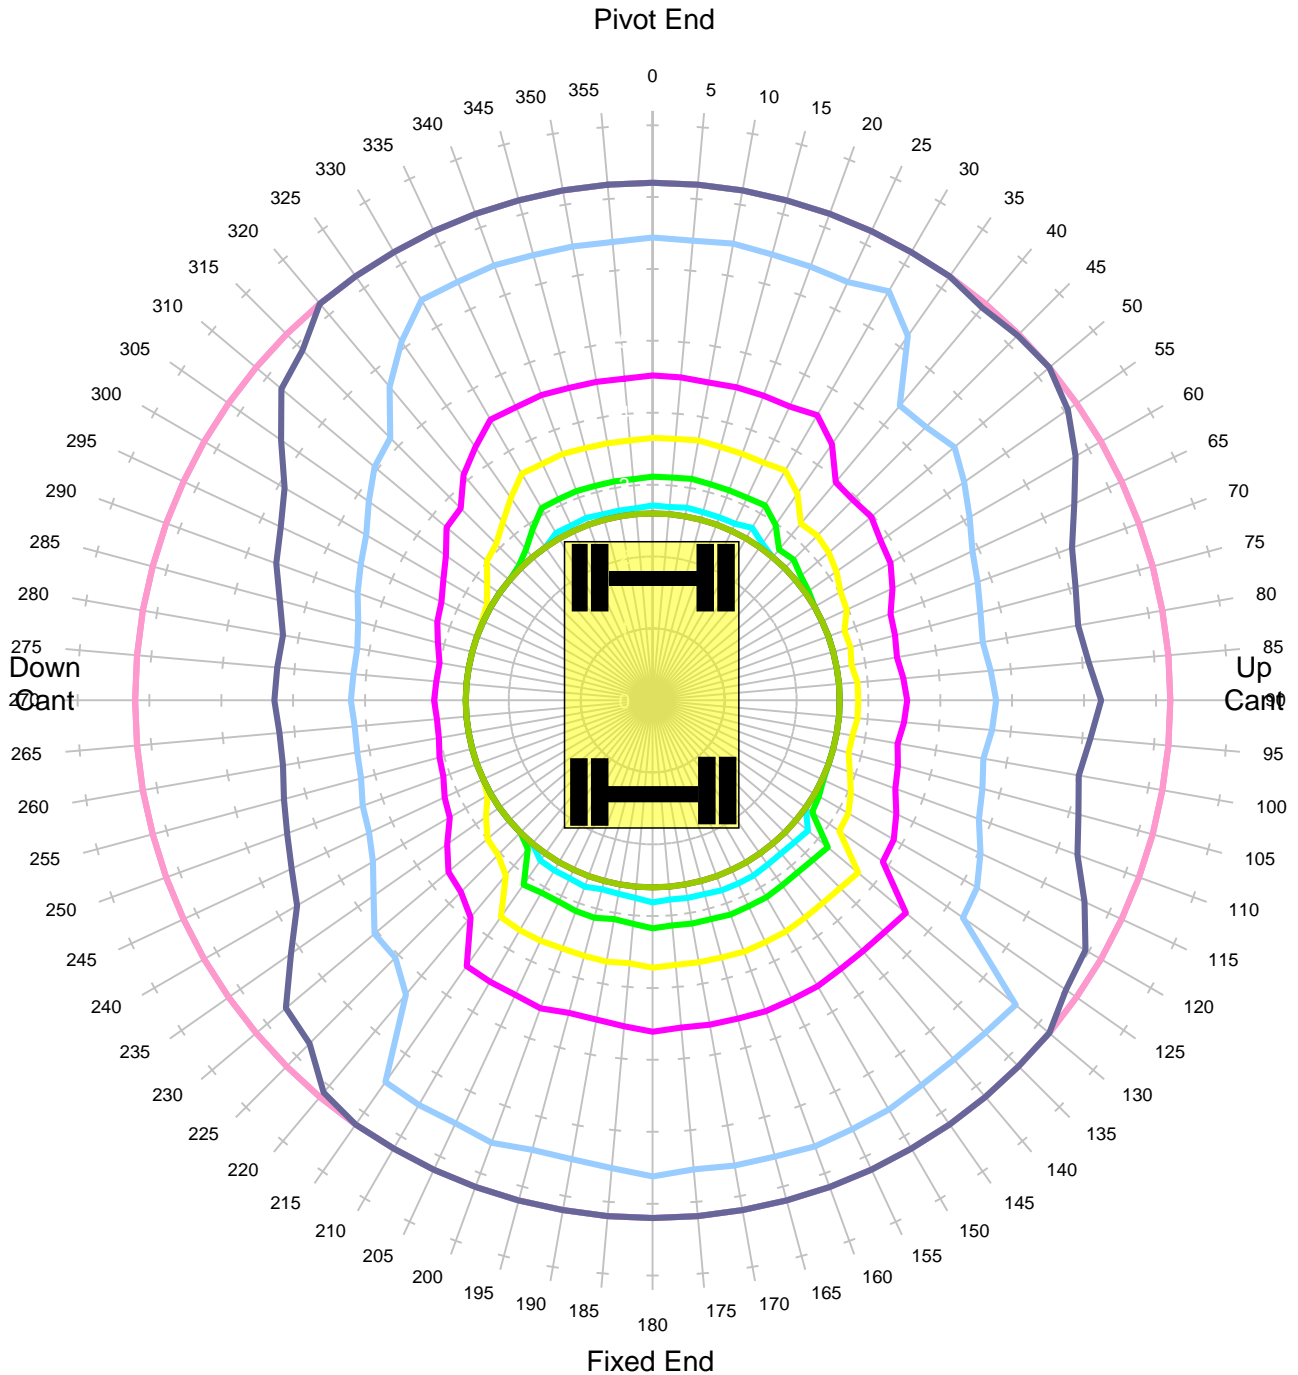

Units in Tonnes


- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM LIFT MODE, STANDARD LIFTING POINT.		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -30 Height 2m
Locked Rail Cant 150mm

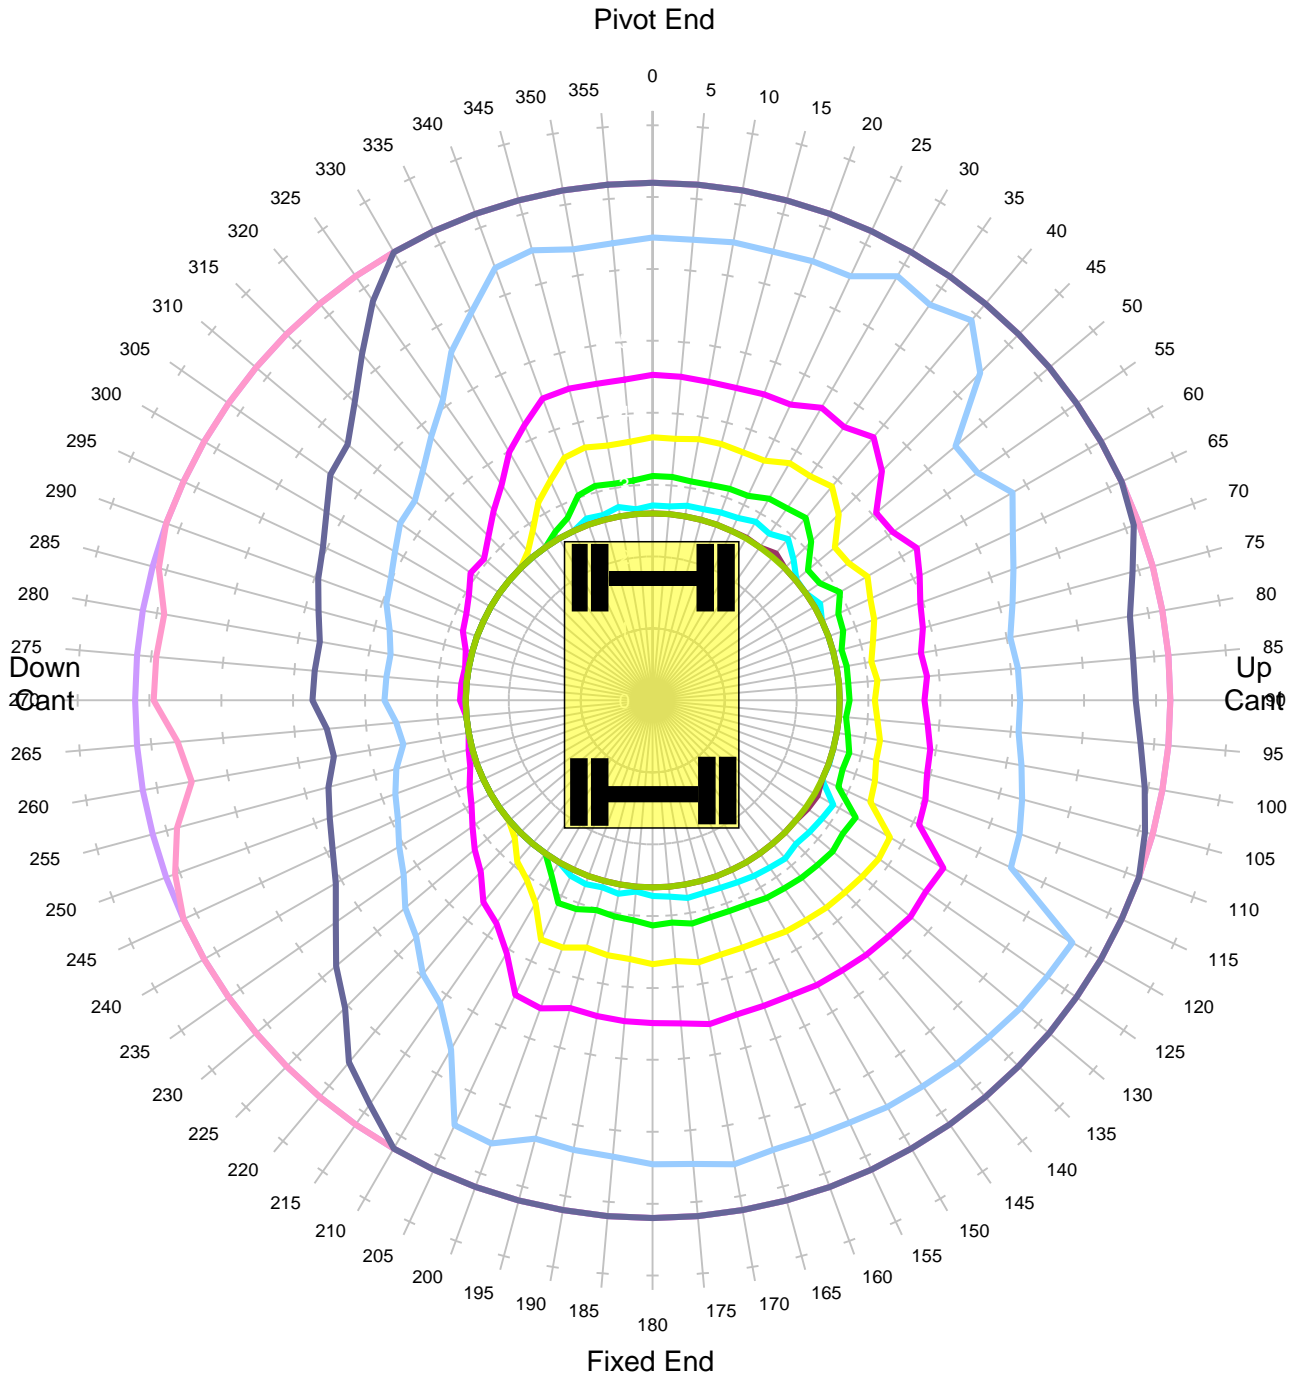

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM LIFT MODE, STANDARD LIFTING POINT.		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Level Ground Height 2m

Unlocked Road

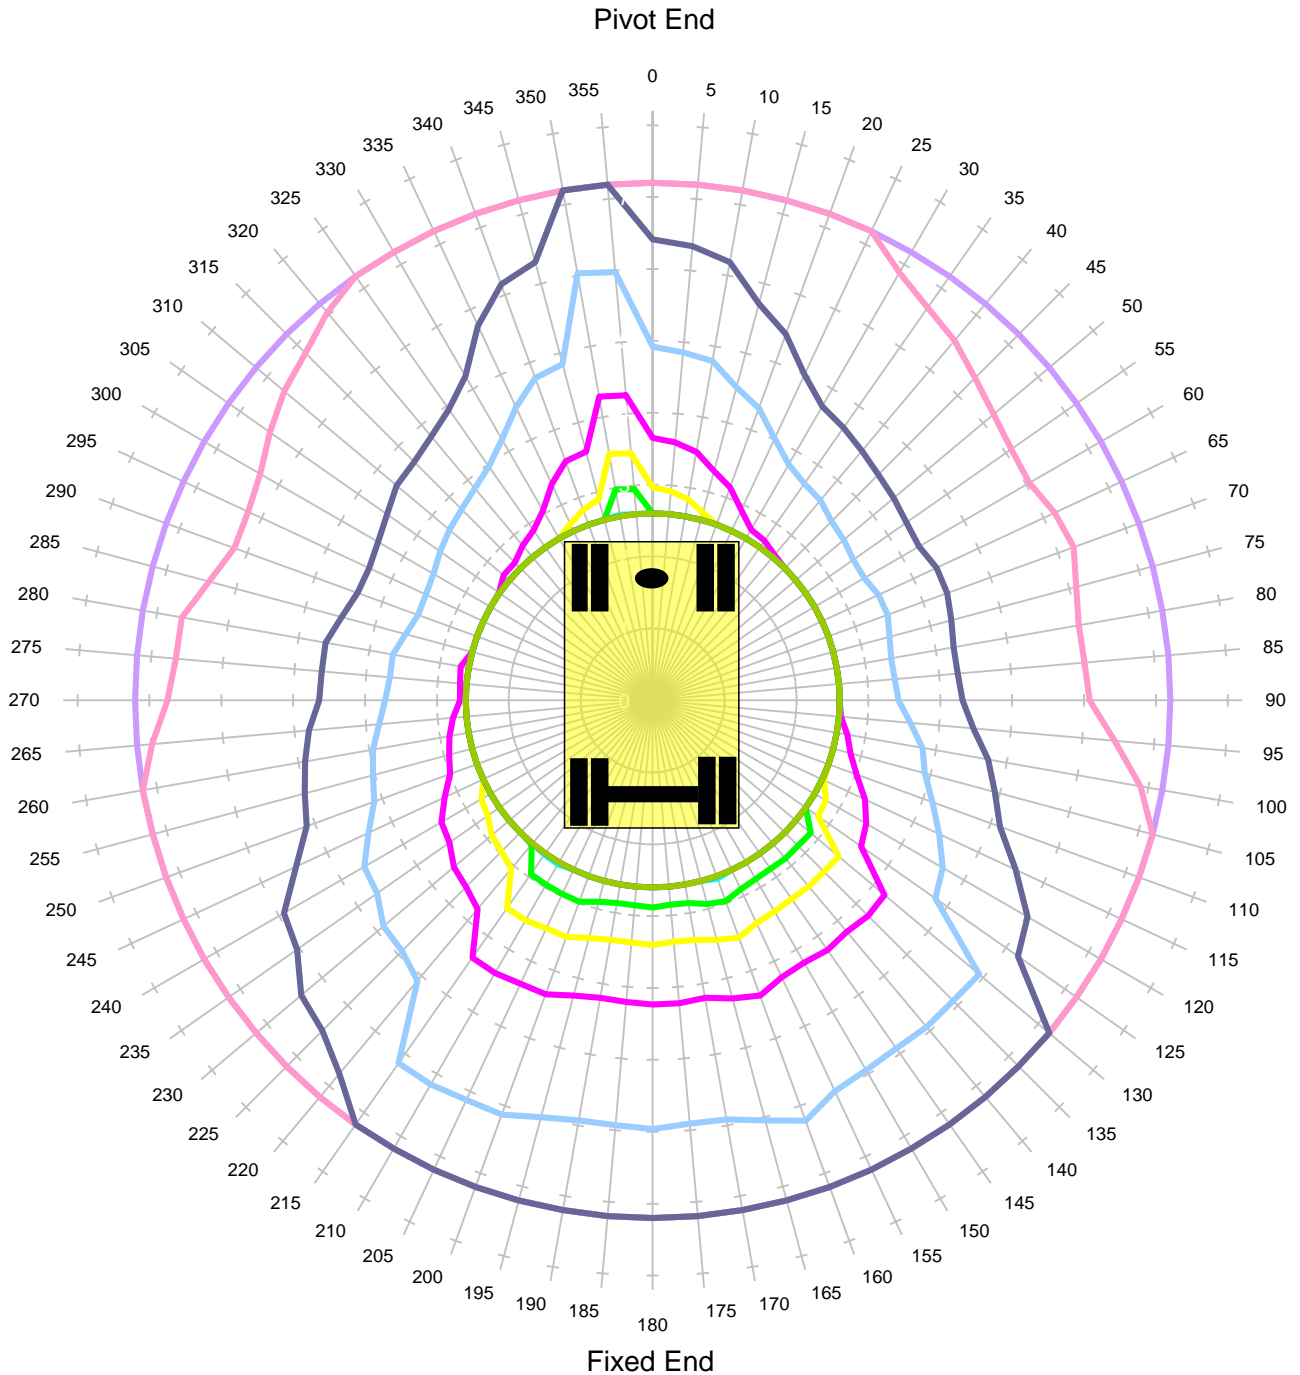

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	47.0%
COMMENT:	TYPE APPROVED, TANDEM LIFT MODE, STANDARD LIFTING POINT.		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Level Ground Height 2m

Locked Road

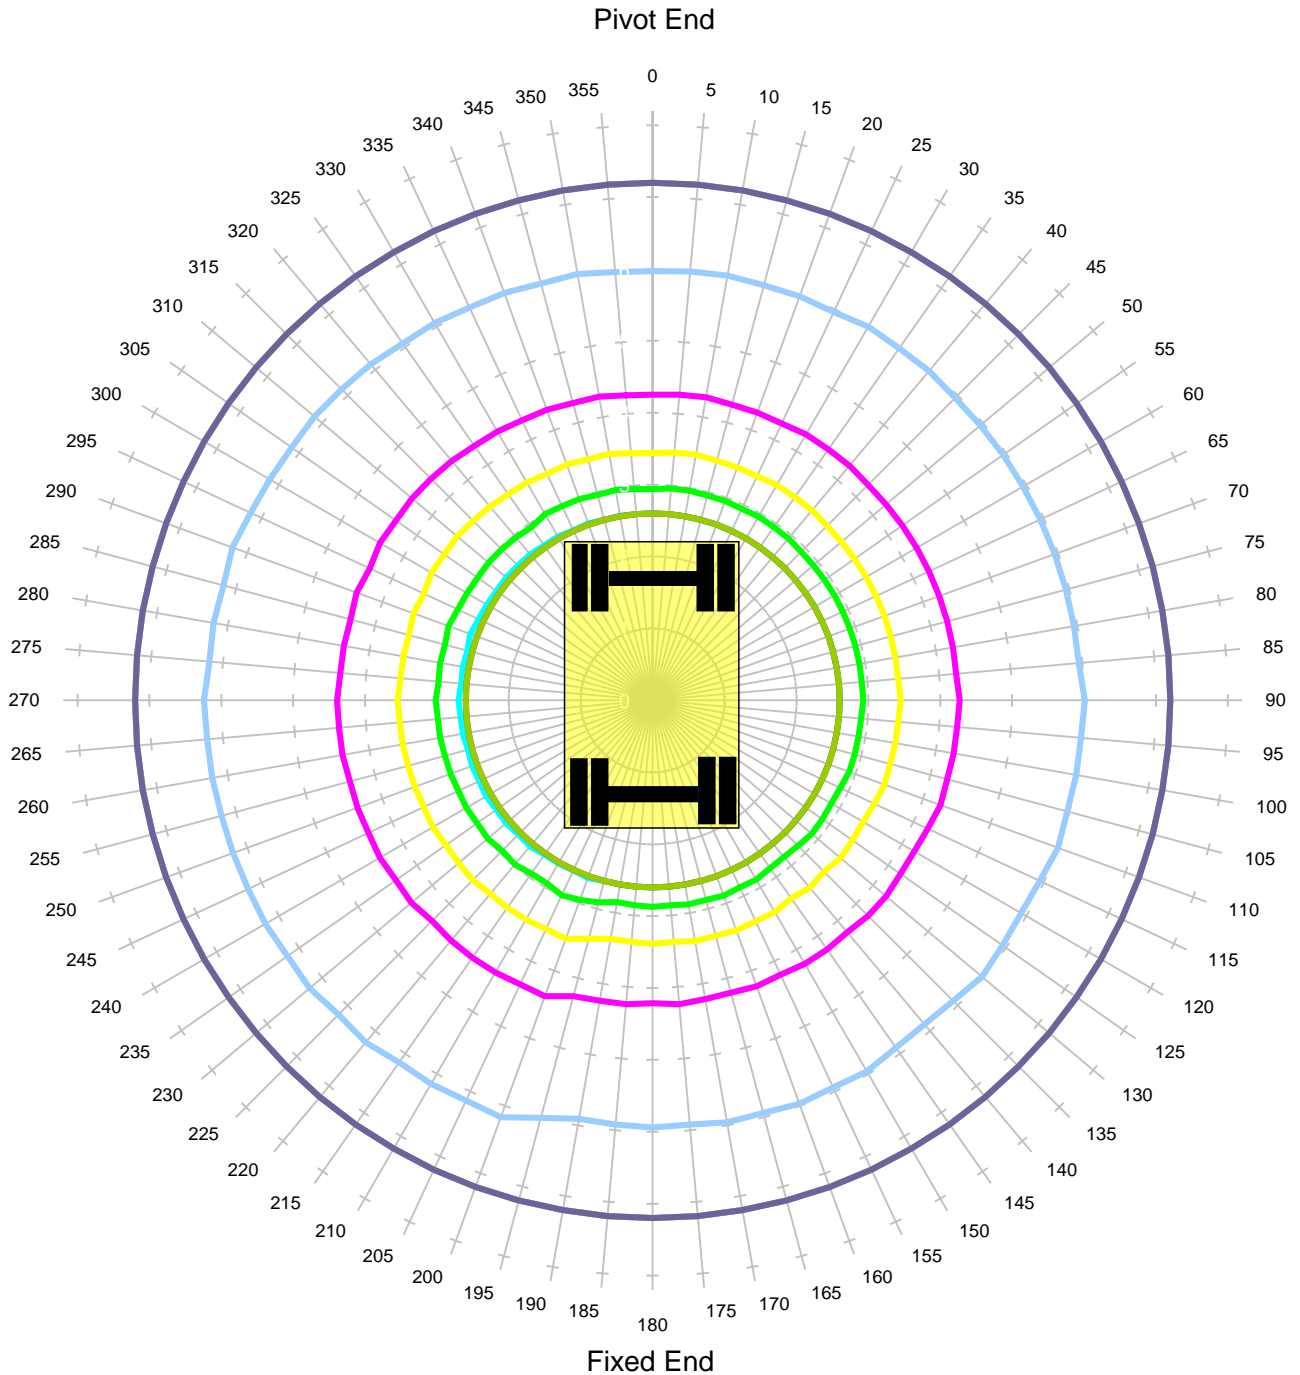

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	47.0%
COMMENT:	TYPE APPROVED, TANDEM LIFT MODE, STANDARD LIFTING POINT.		