




DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant -150mm QH

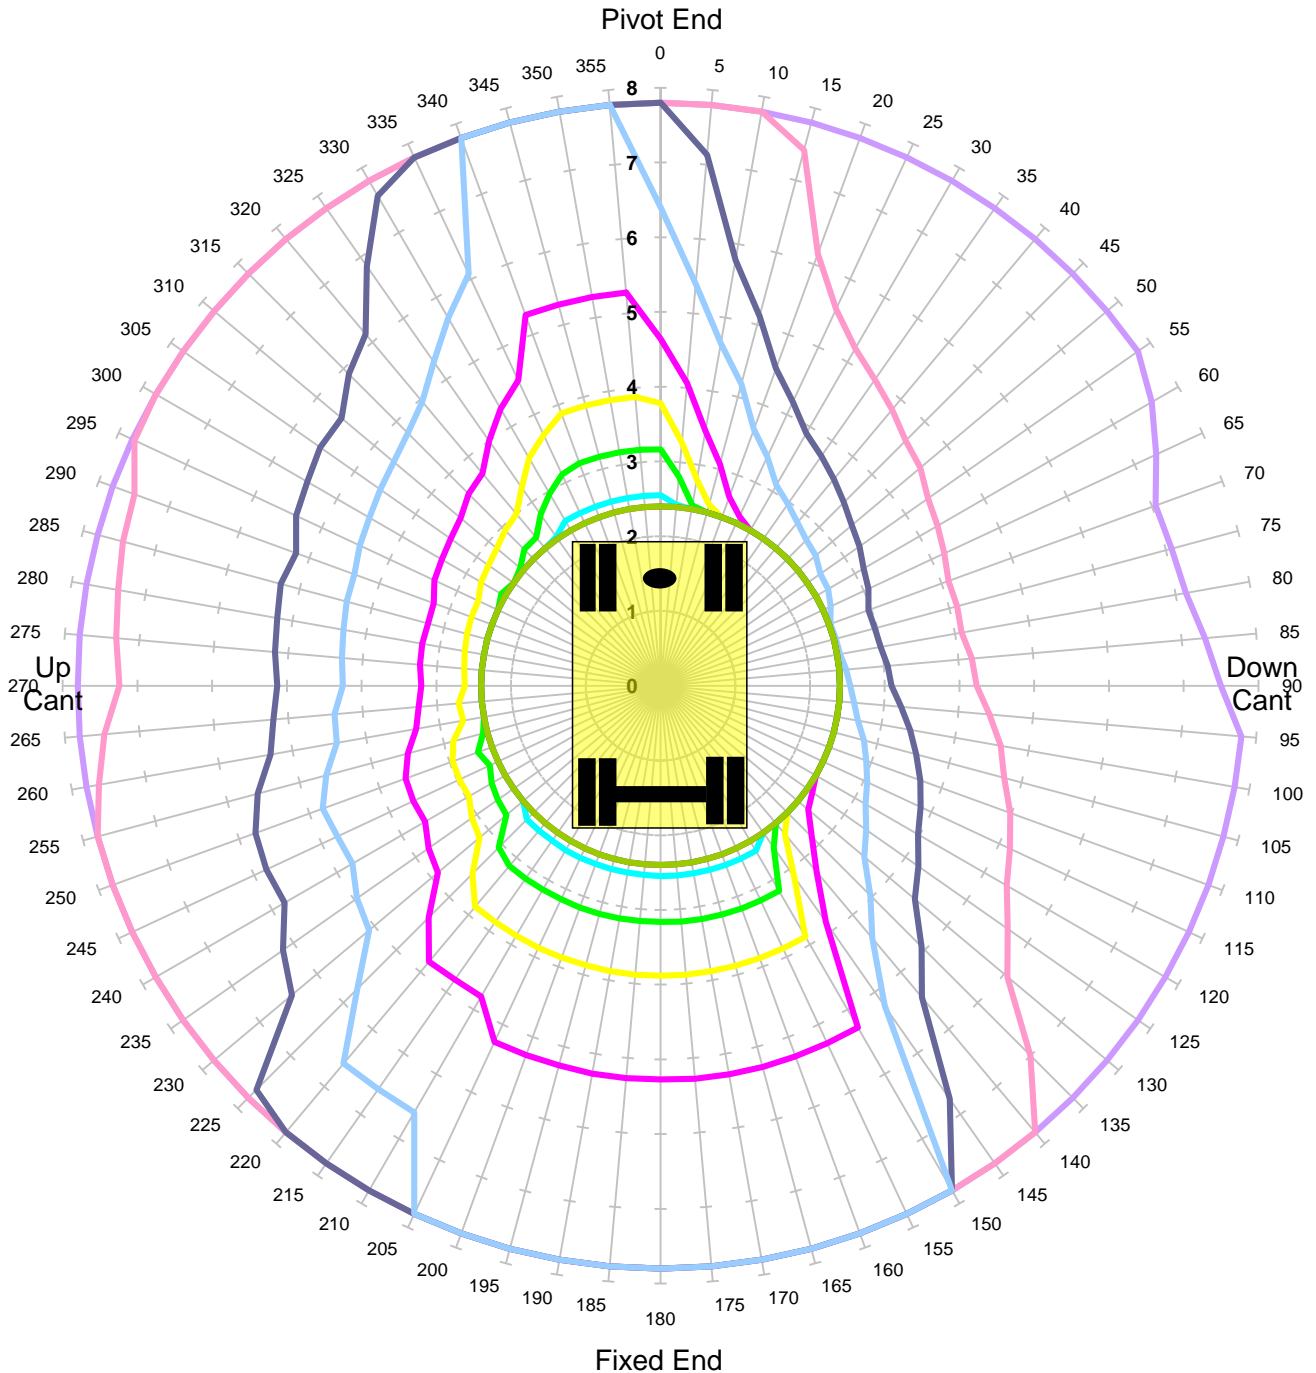

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	64.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, QUICK HITCH		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -25 Height 2m

Unlocked Rail Cant -50mm QH

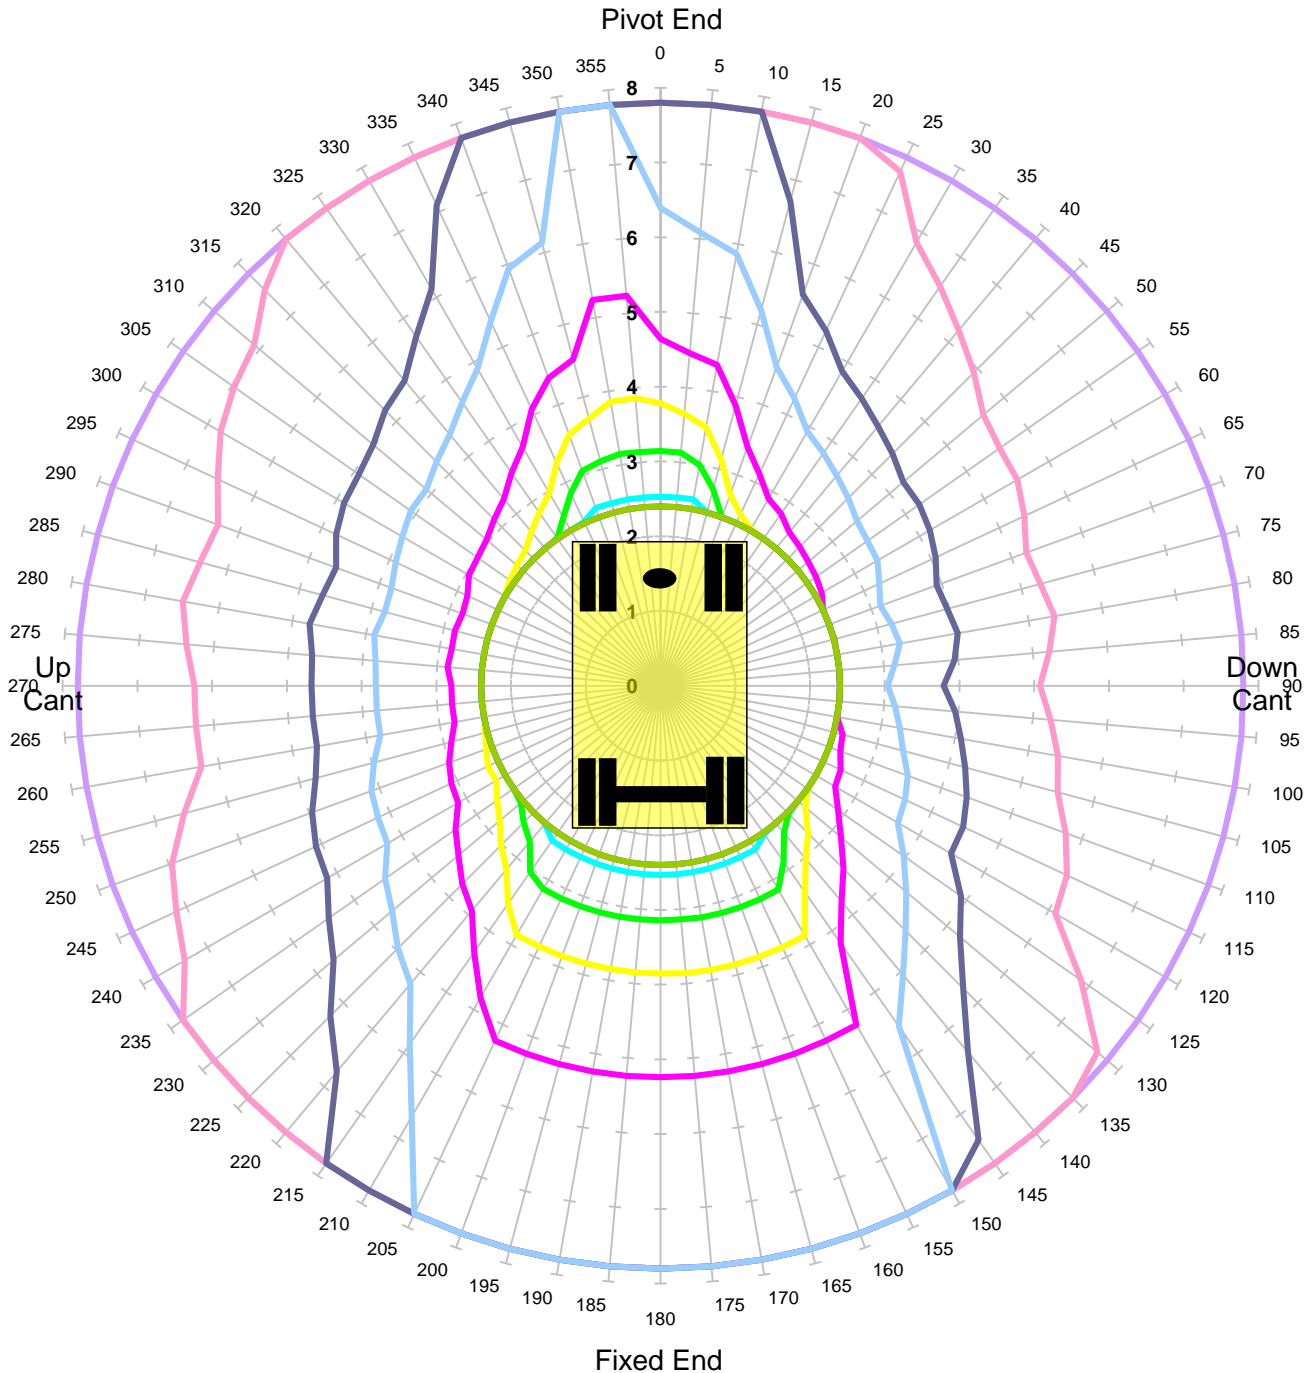

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	64.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, QUICK HITCH		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant 50mm QH

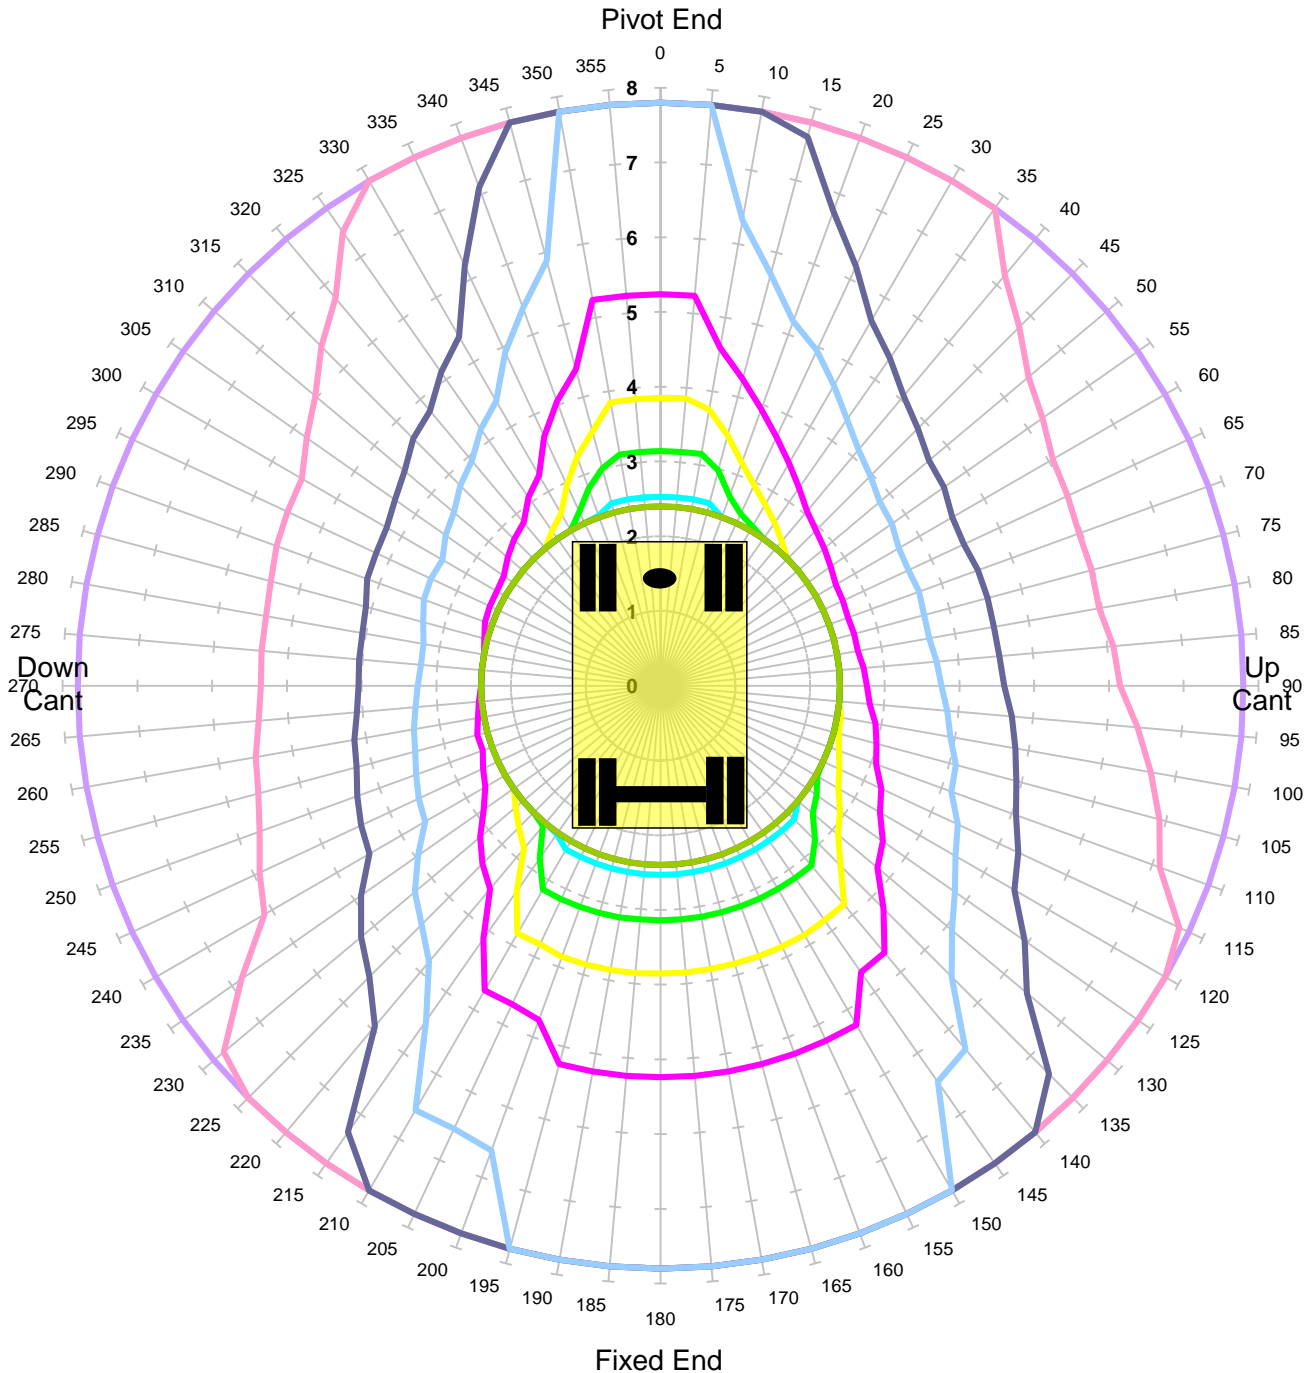

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	64.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, QUICK HITCH		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant 150mm QH

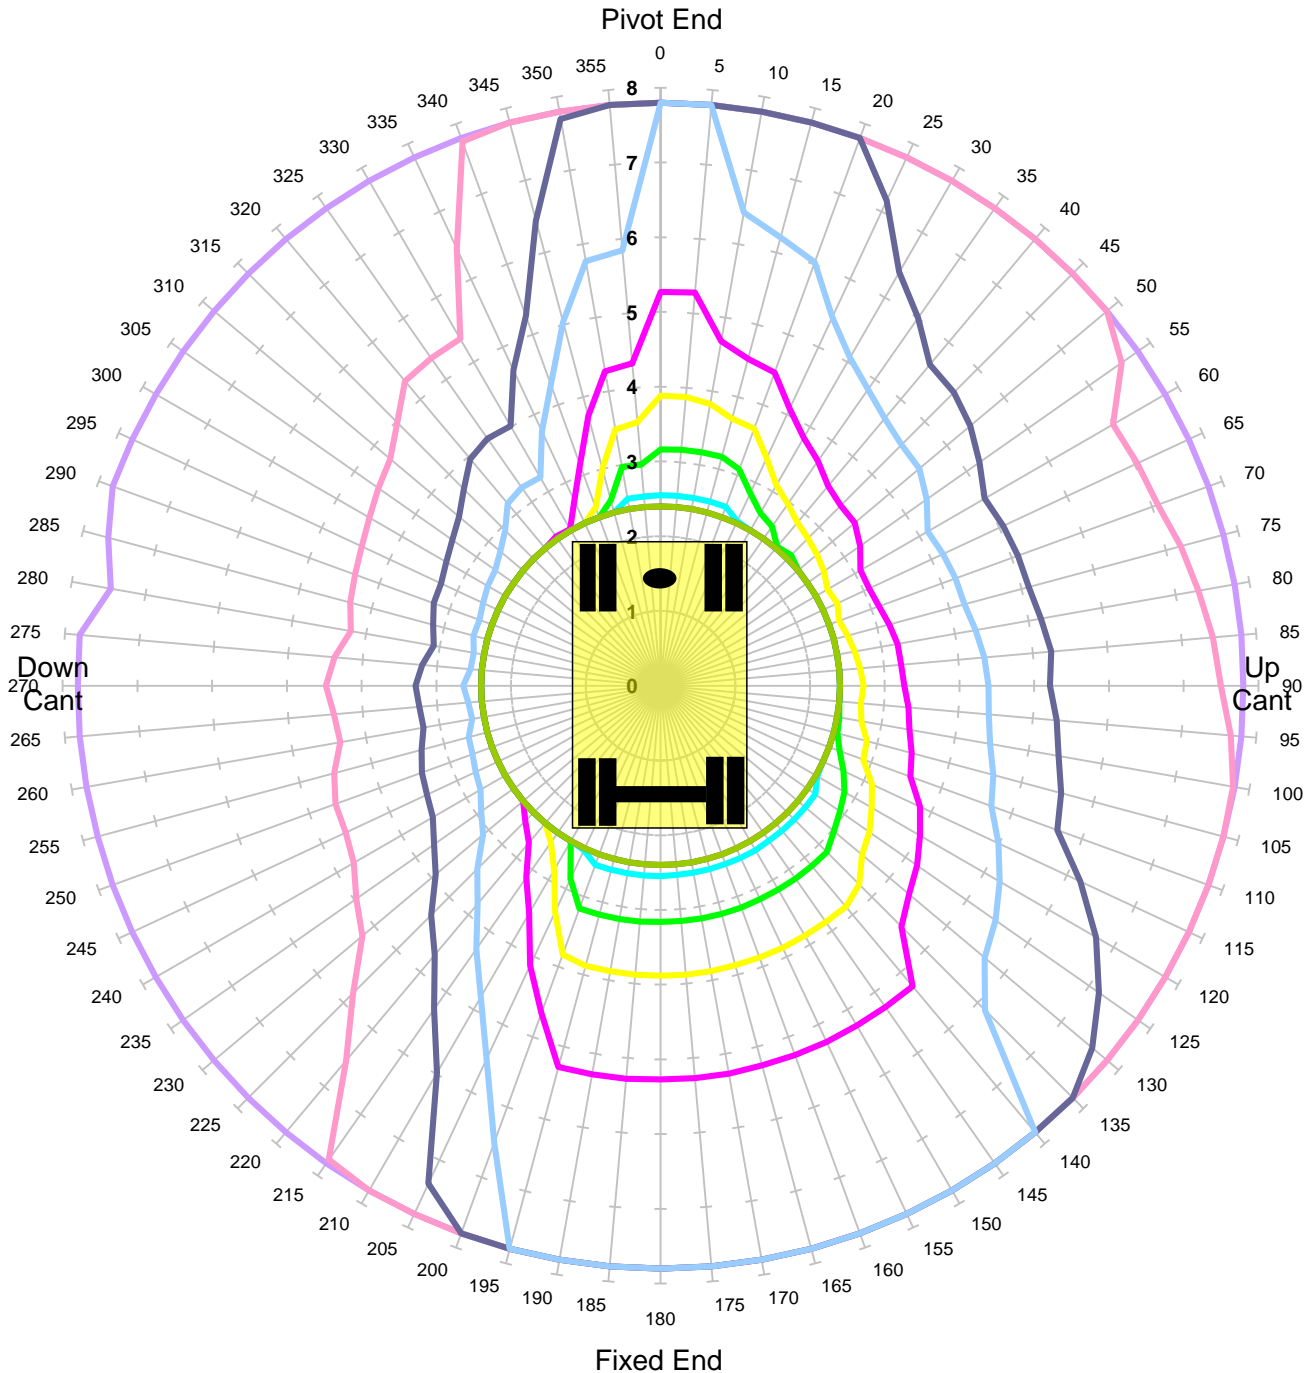

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	64.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, QUICK HITCH		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant -150mm QH

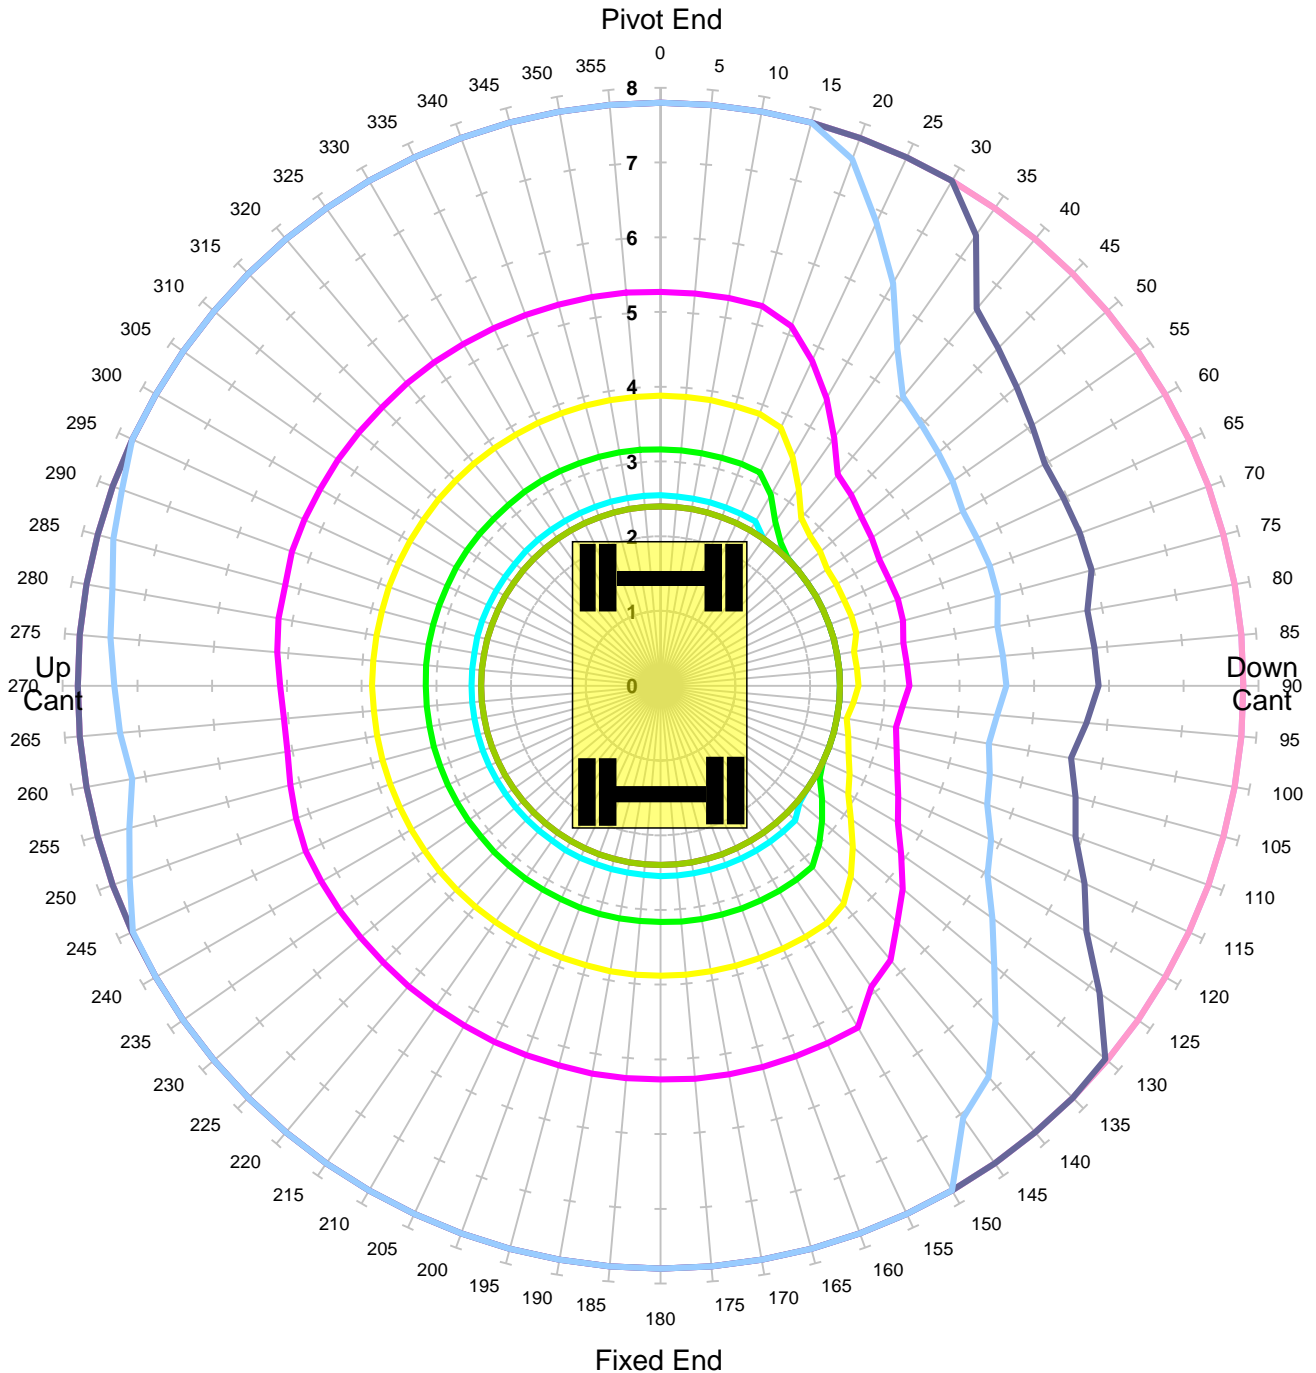

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, QUICK HITCH		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -25 Height 2m

Locked Rail Cant -50mm QH

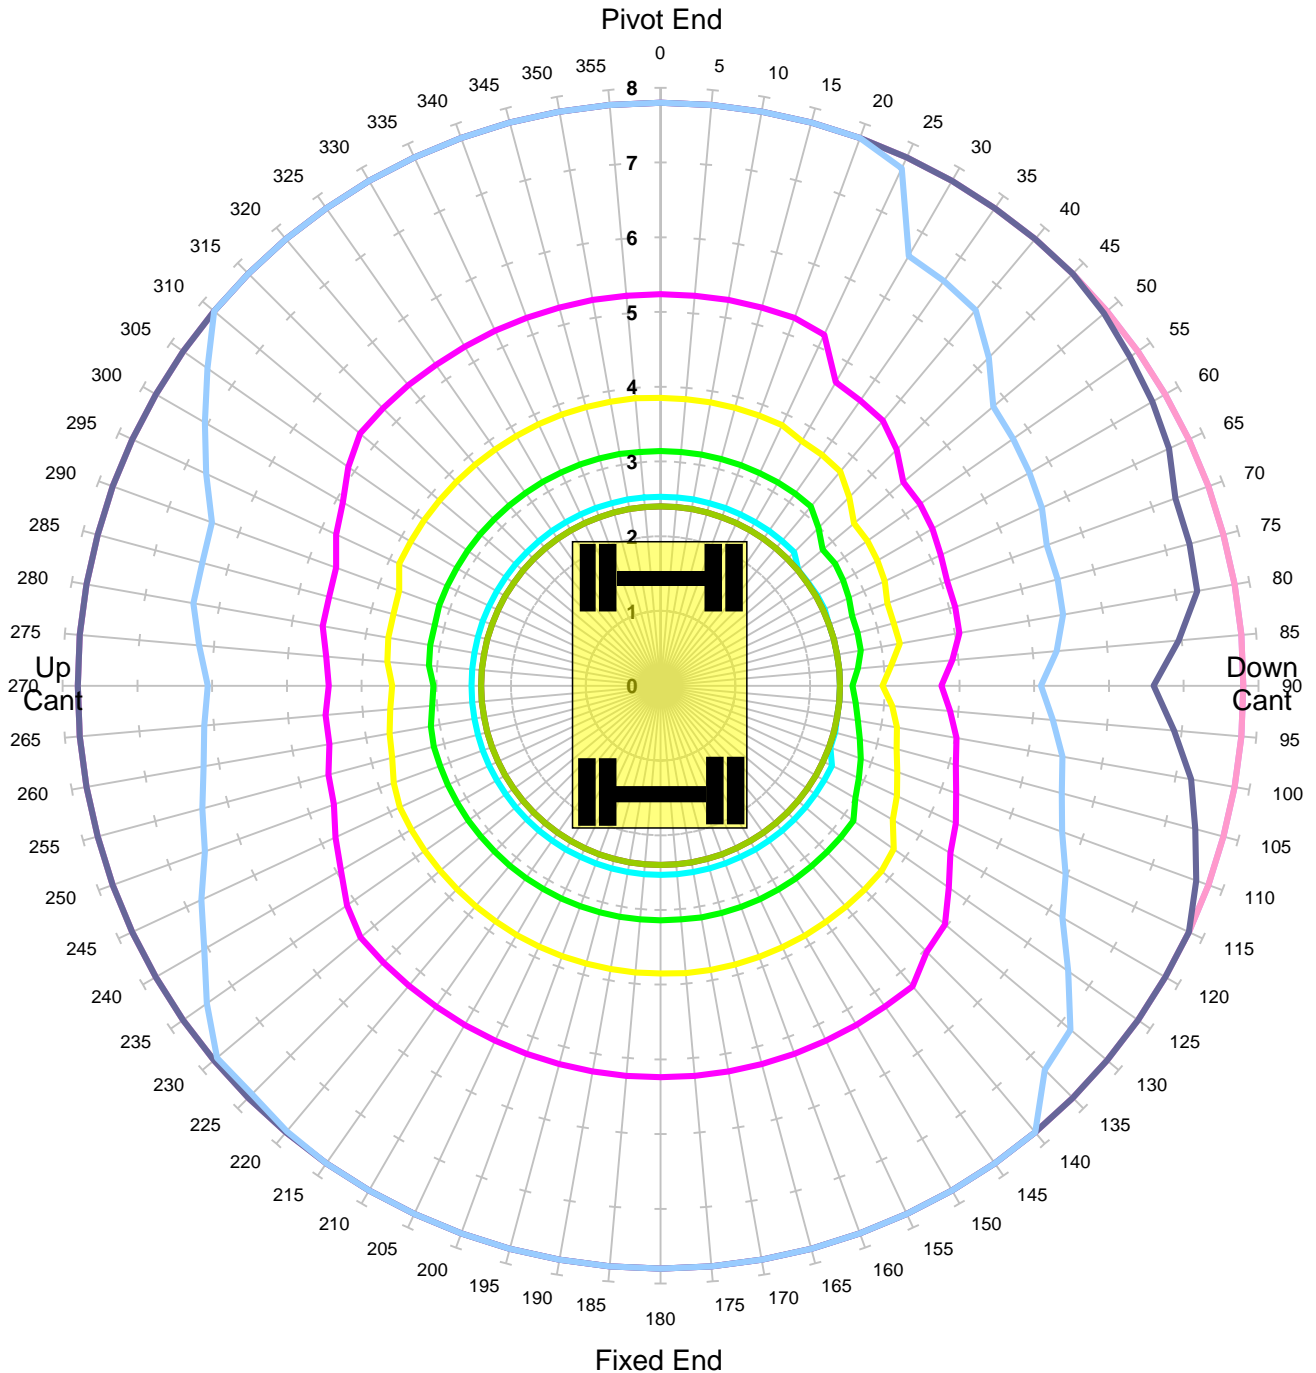

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, QUICK HITCH		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Gradient 1 in -25 Height 2m

Locked Rail Cant 50mm QH

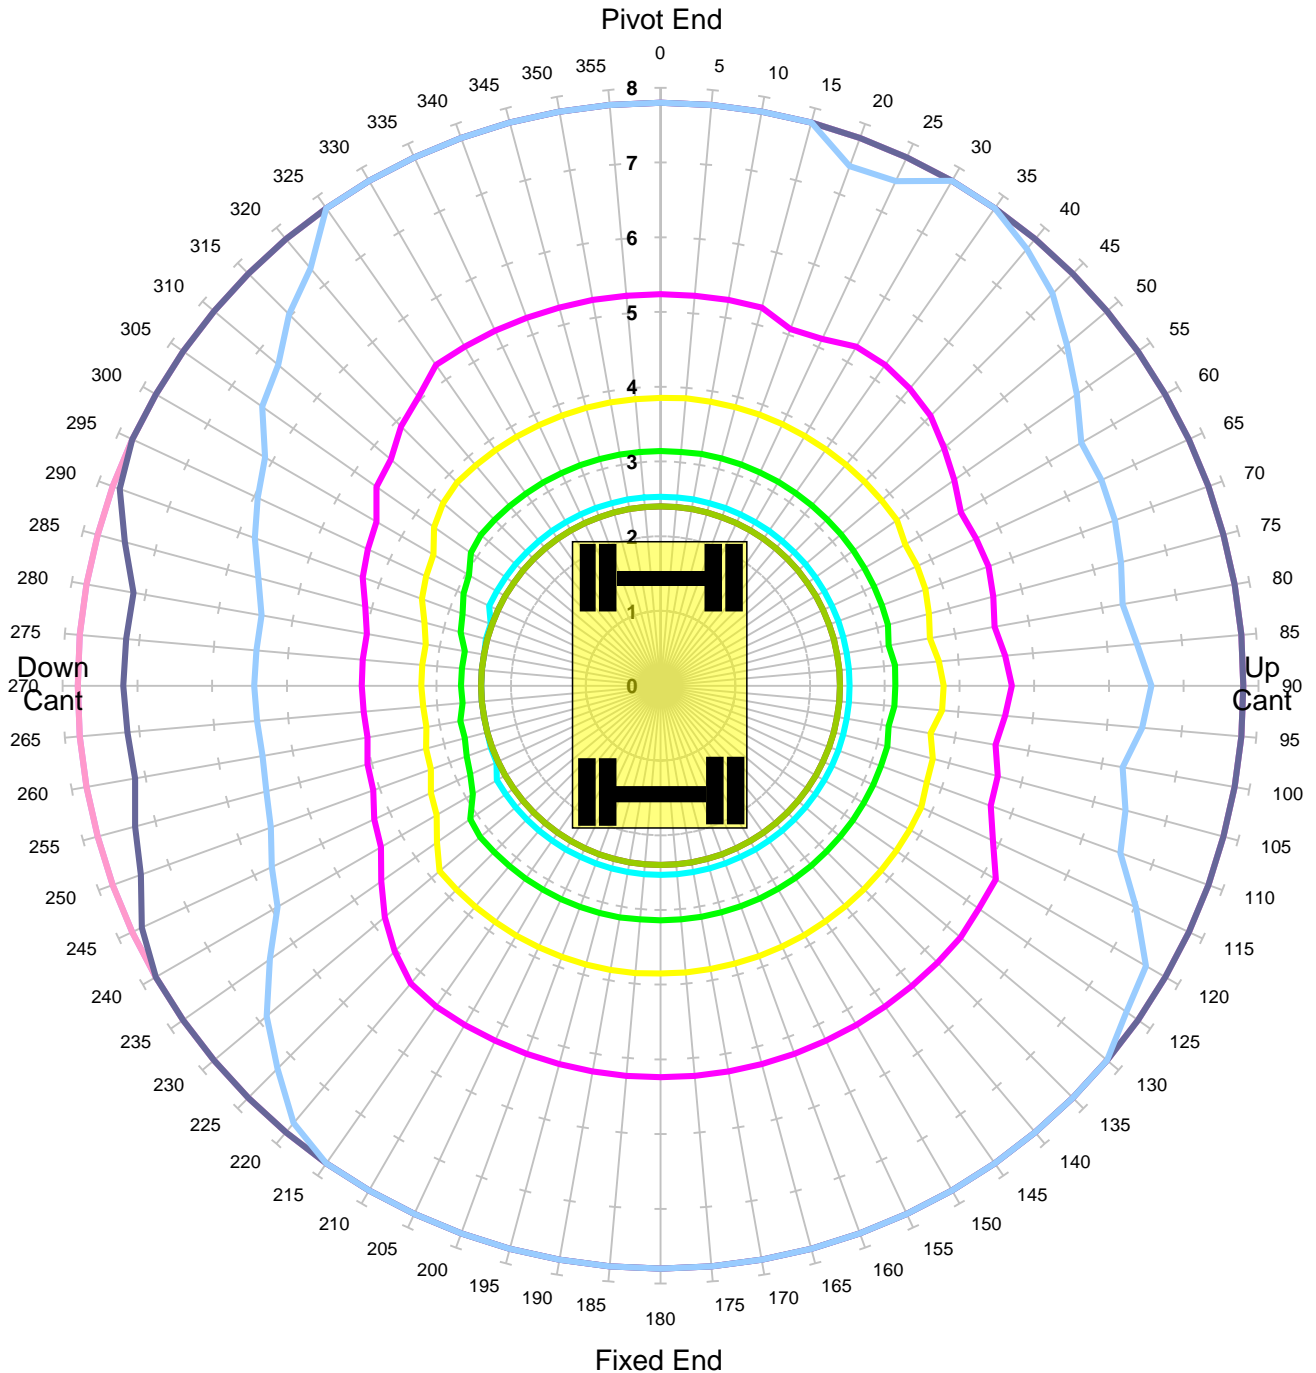

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, QUICK HITCH		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant 150mm QH

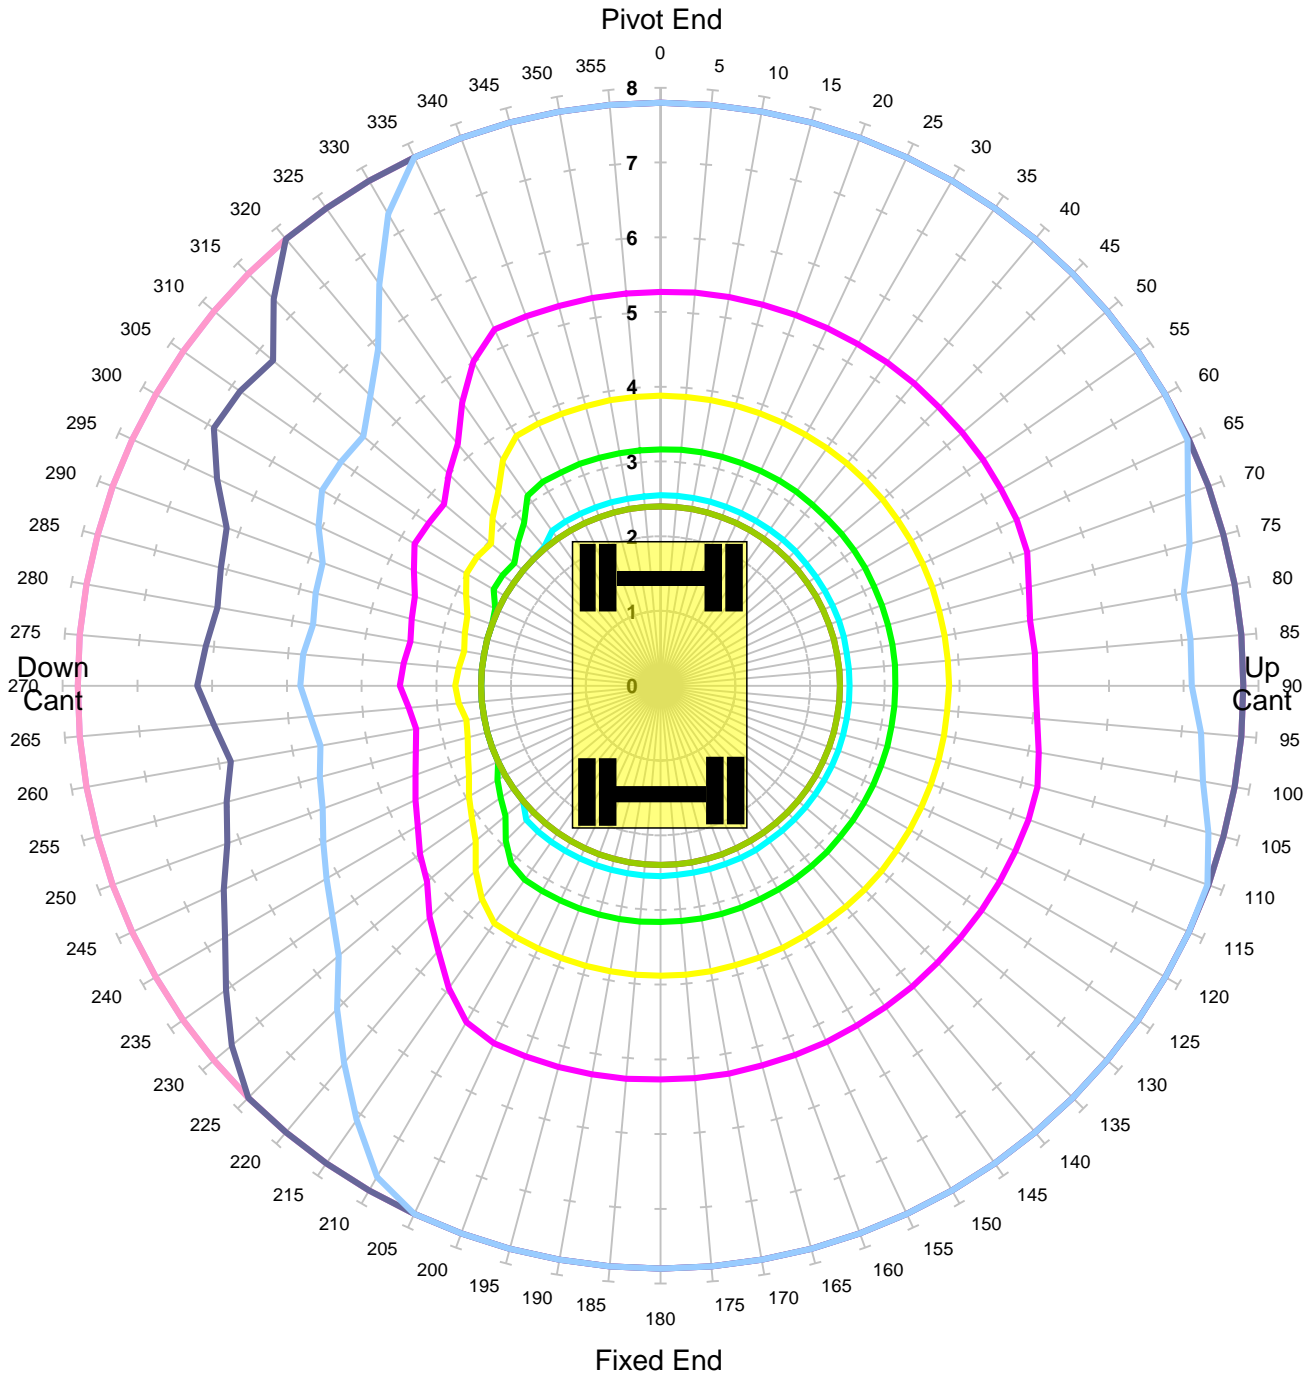

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	90.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, QUICK HITCH		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Level Ground Height 2m

Unlocked Road QH

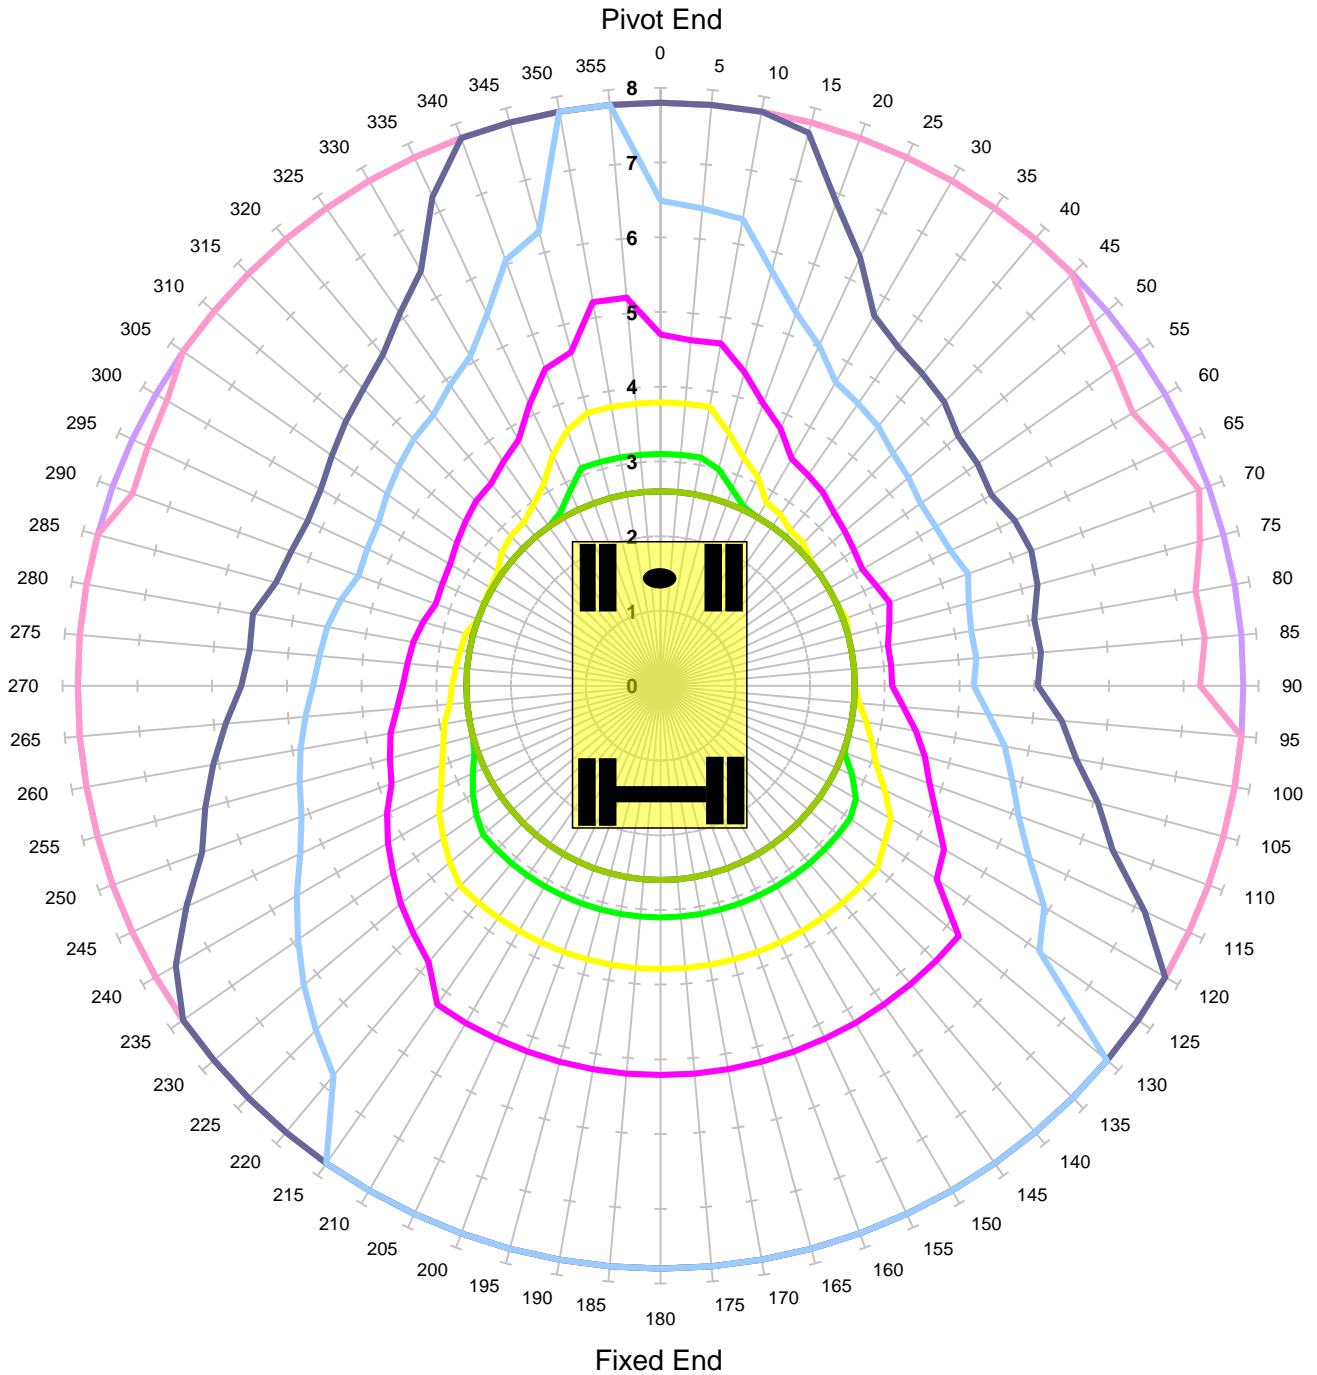

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	71.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, QUICK HITCH		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Level Ground Height 2m

Locked Road QH

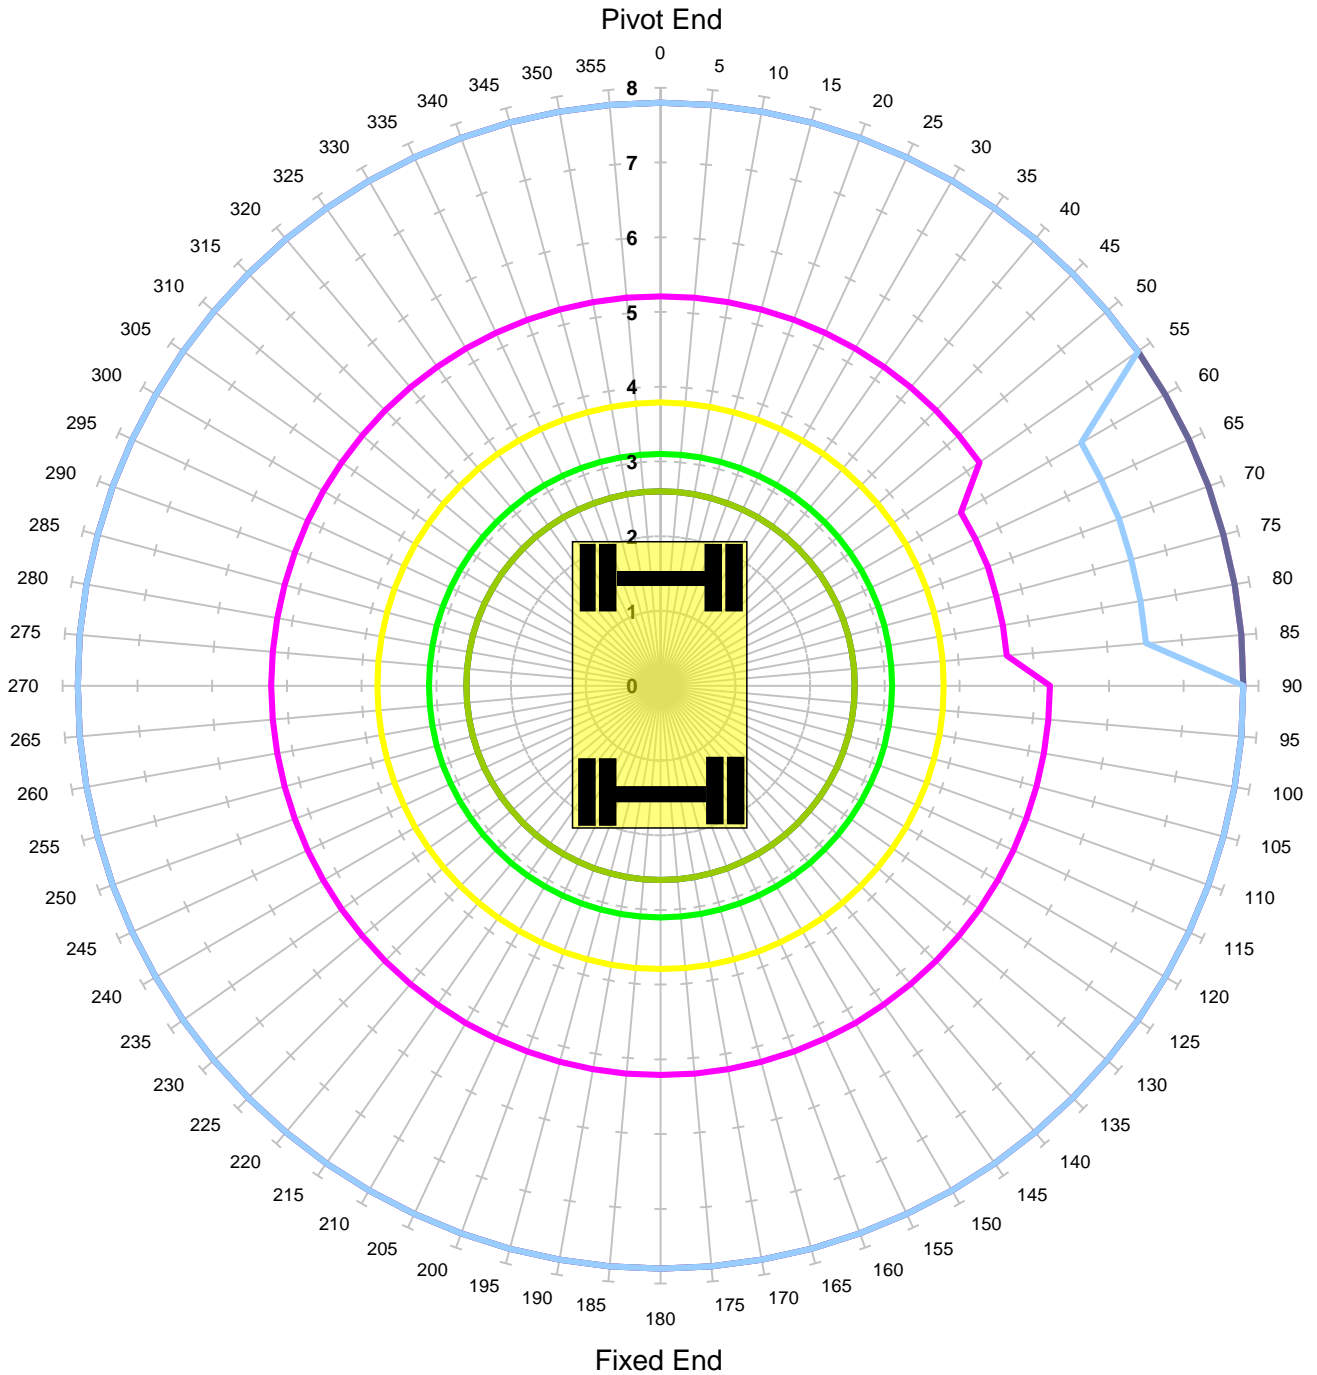

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	71.0%
COMMENT:	TYPE APPROVED, NORMAL MODE, QUICK HITCH		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant -150mm QH Tandem

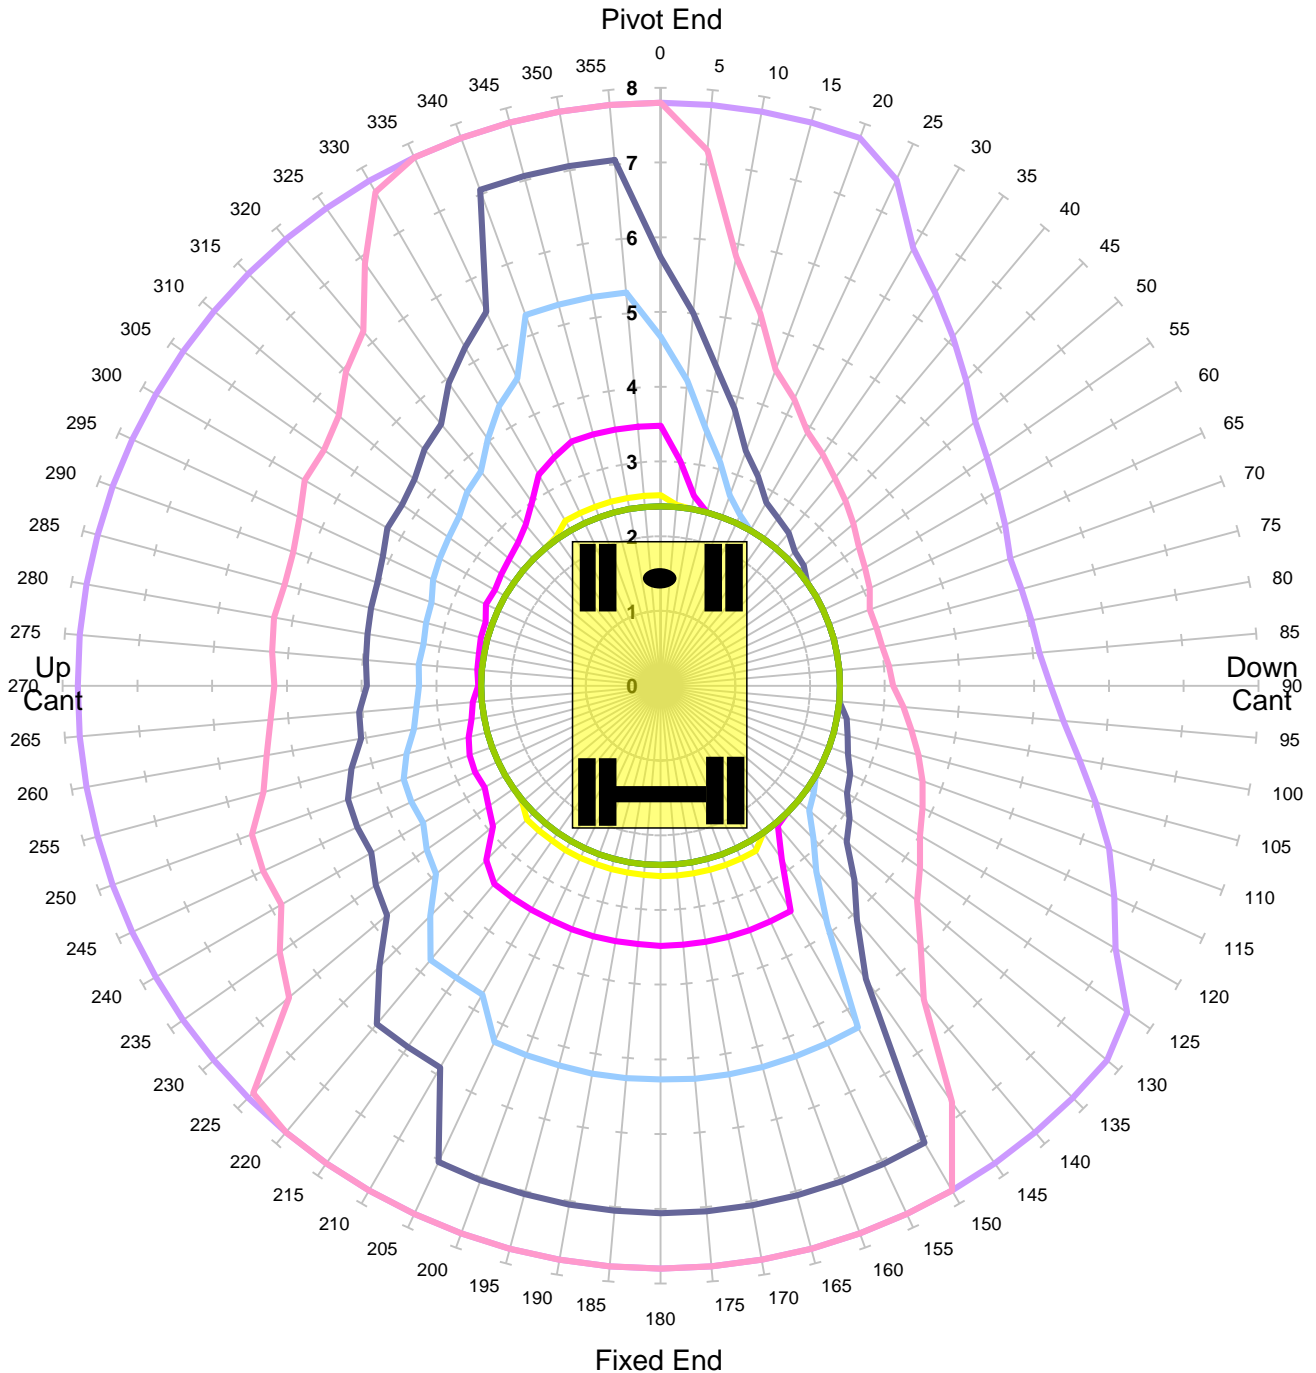

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	43.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, QUICK HITCH		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant -50mm QH Tandem

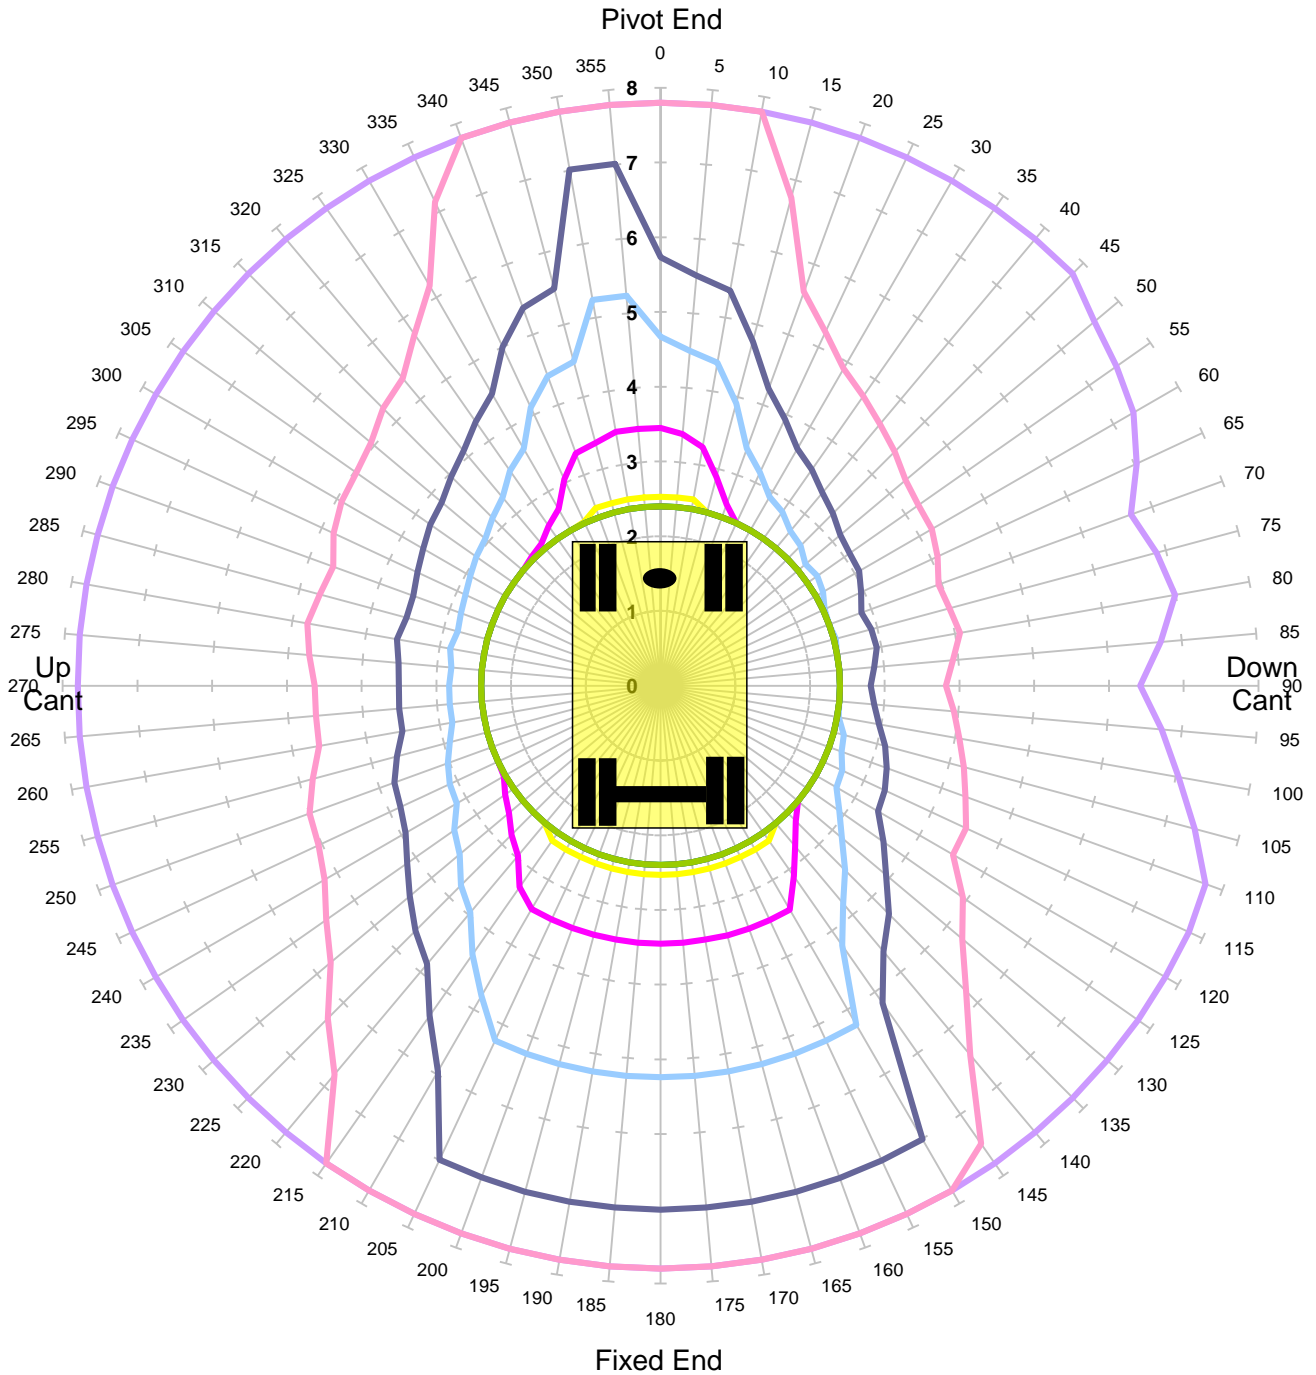

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	43.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, QUICK HITCH		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant 50mm QH Tandem

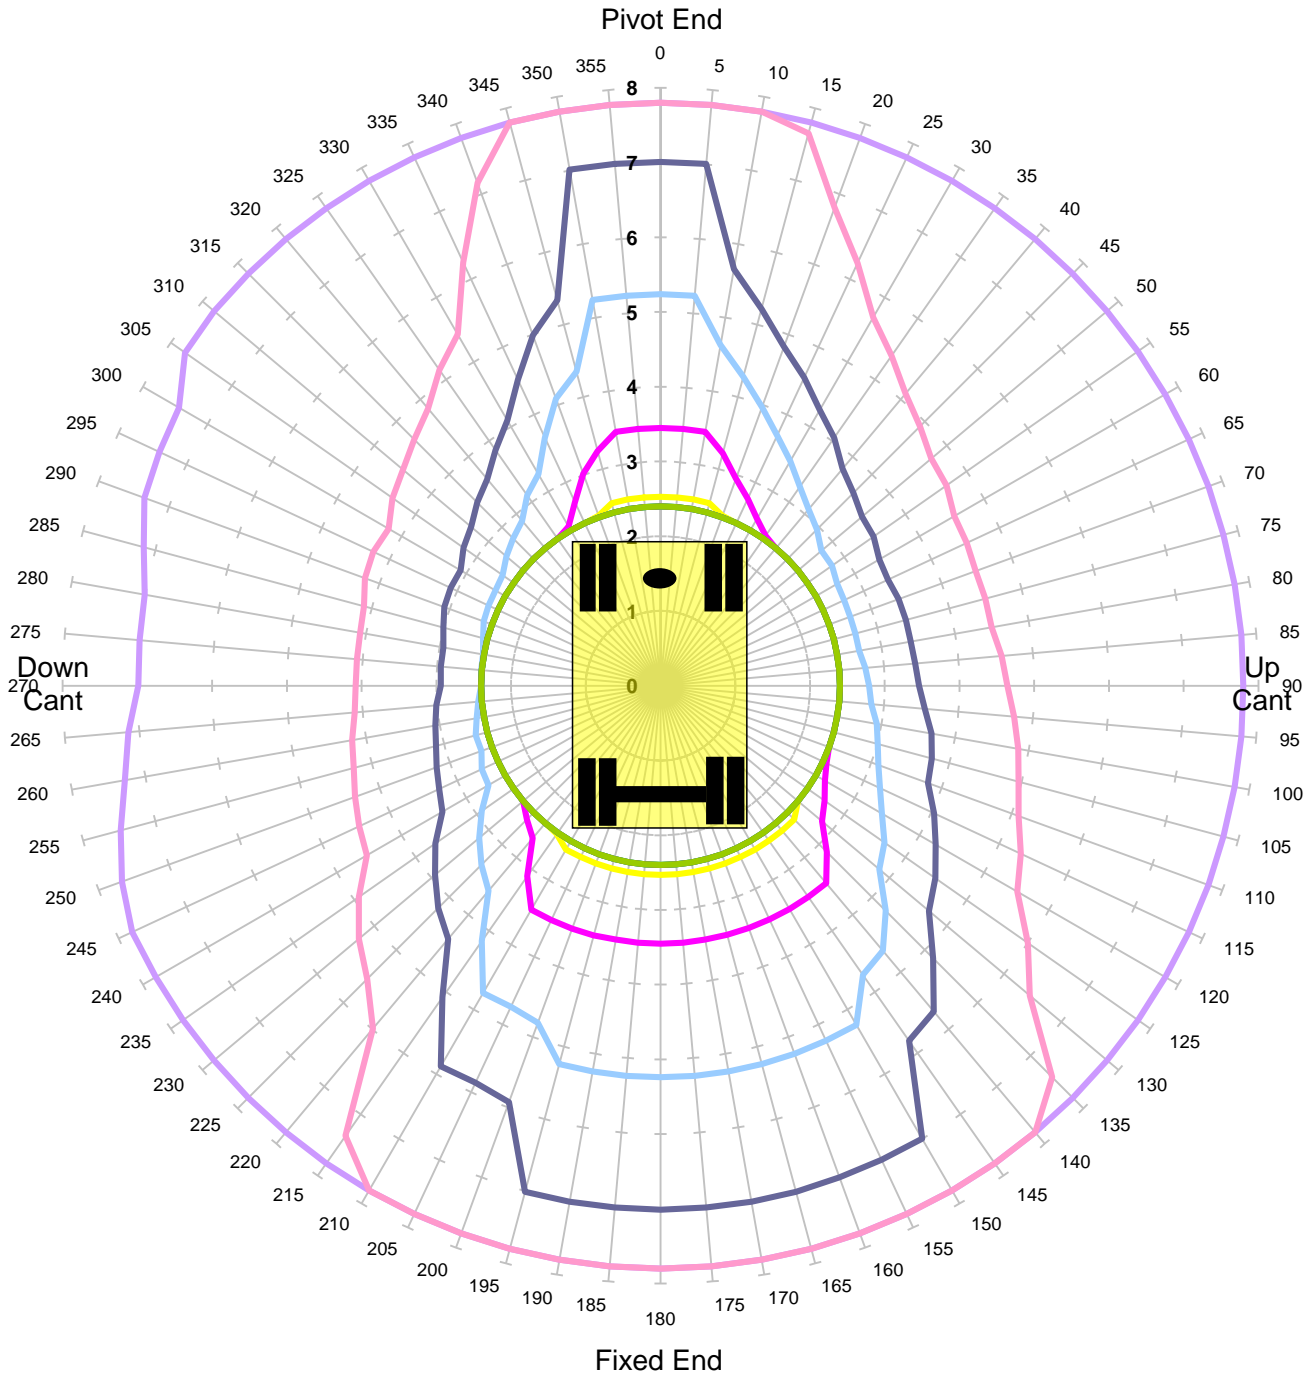

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	43.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, QUICK HITCH		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Unlocked Rail Cant 150mm QH Tandem

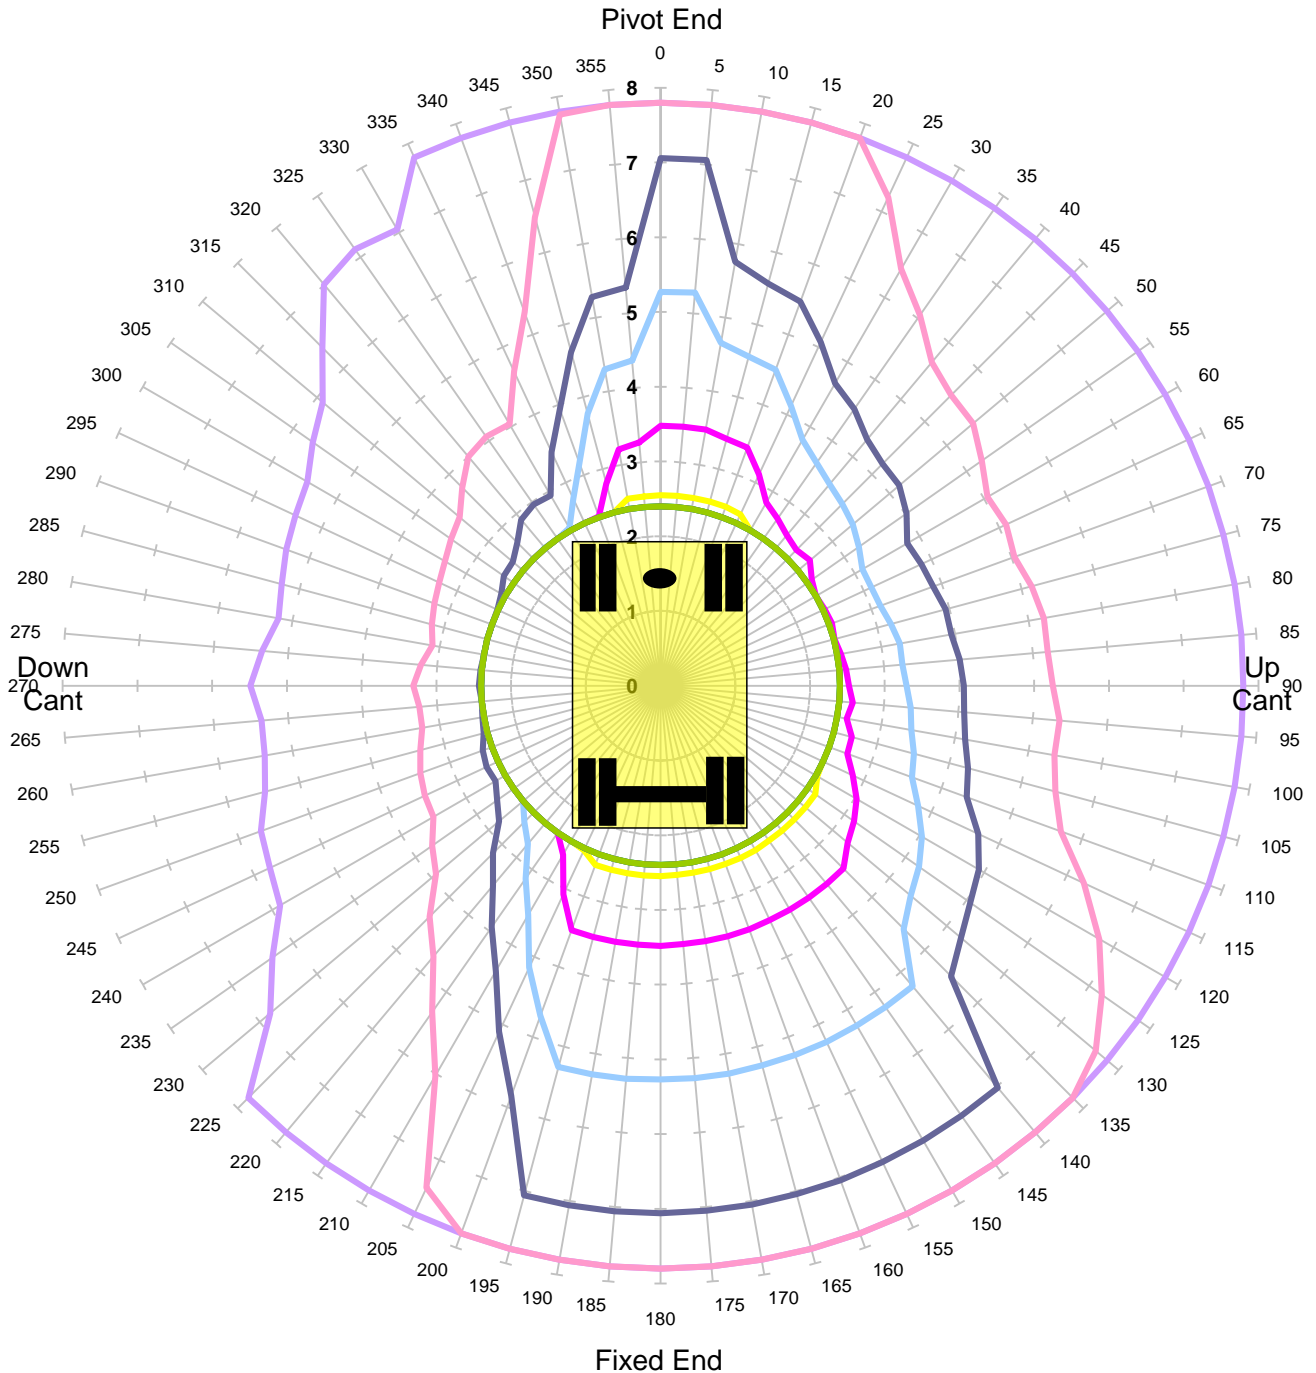

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	43.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, QUICK HITCH		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant -150mm QH Tandem

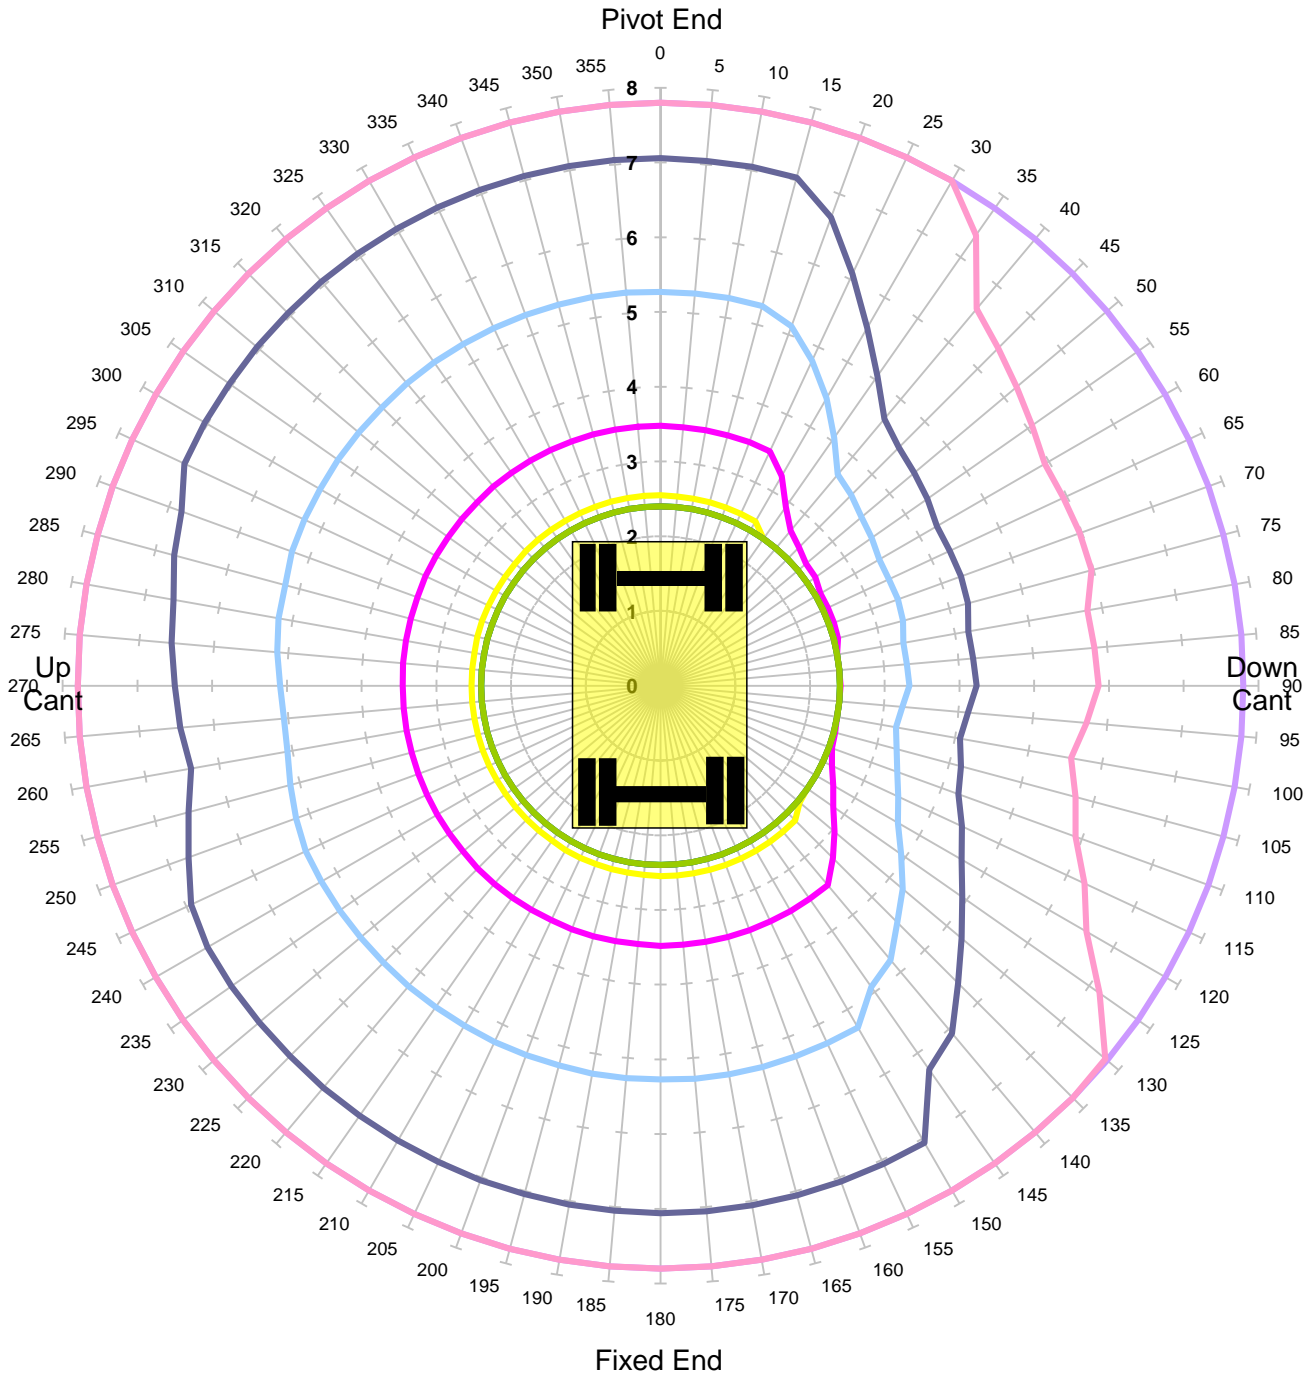

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, QUICK HITCH		



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant -50mm QH Tandem

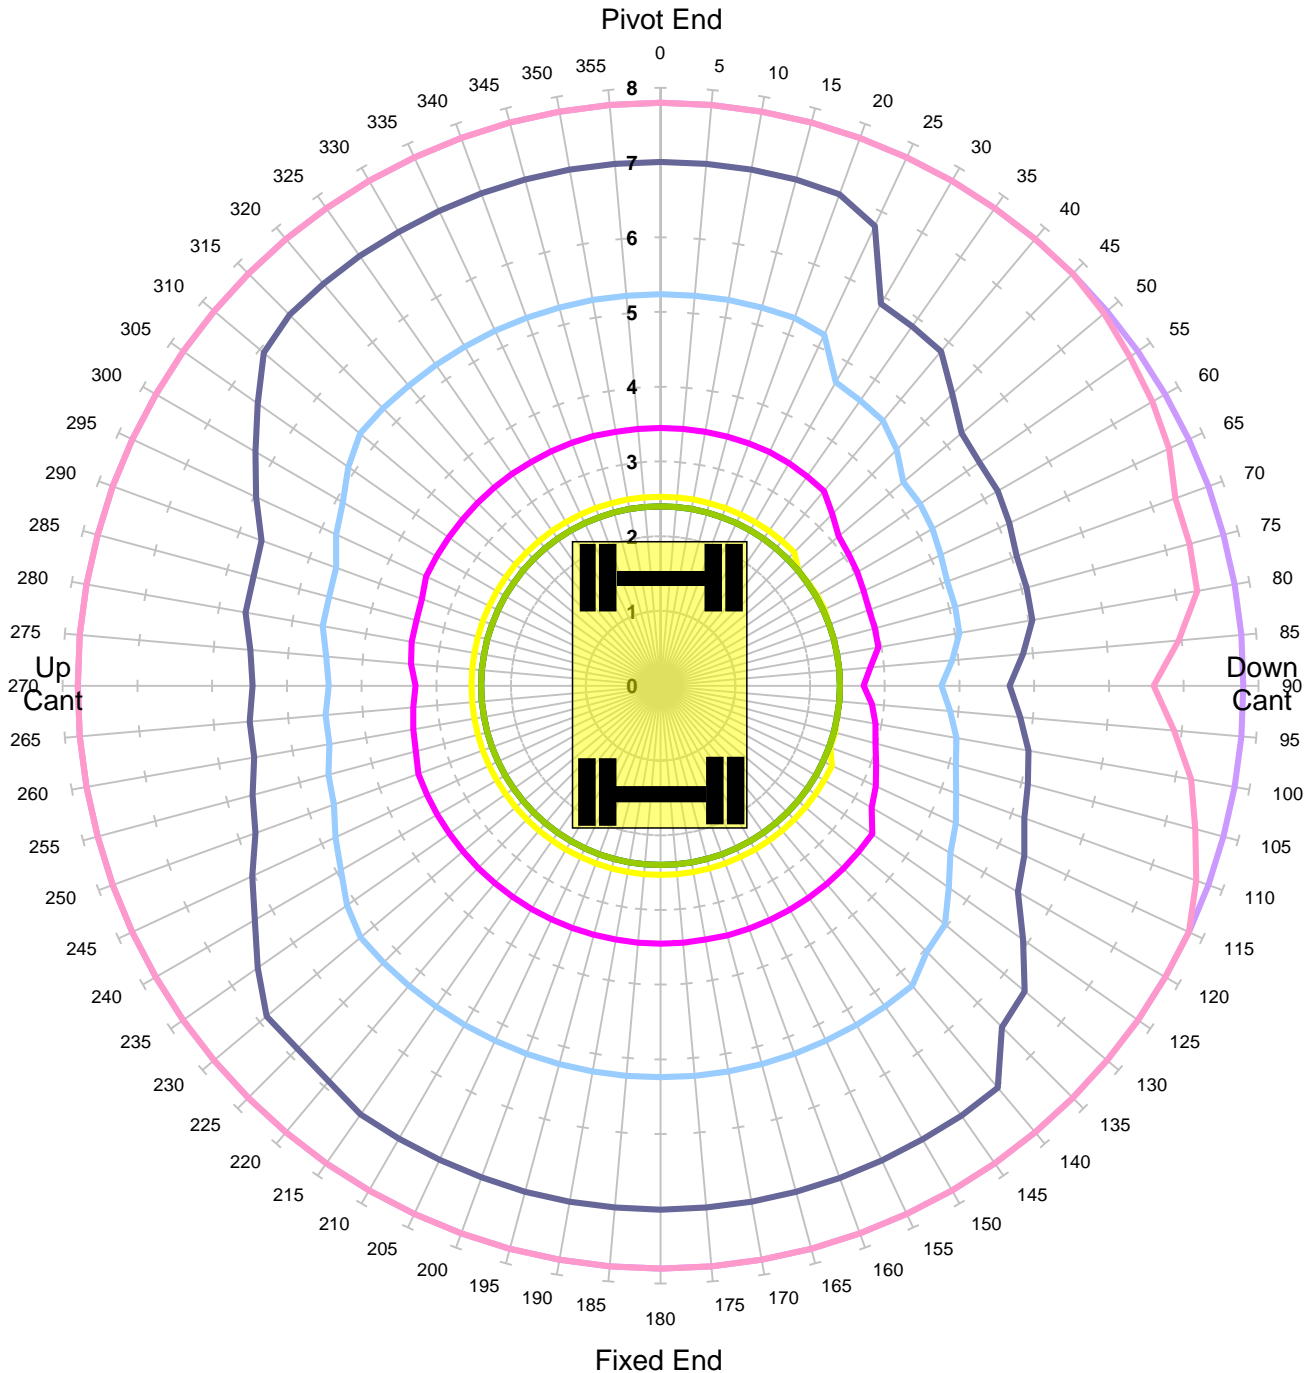

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, QUICK HITCH		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant 50mm QH Tandem

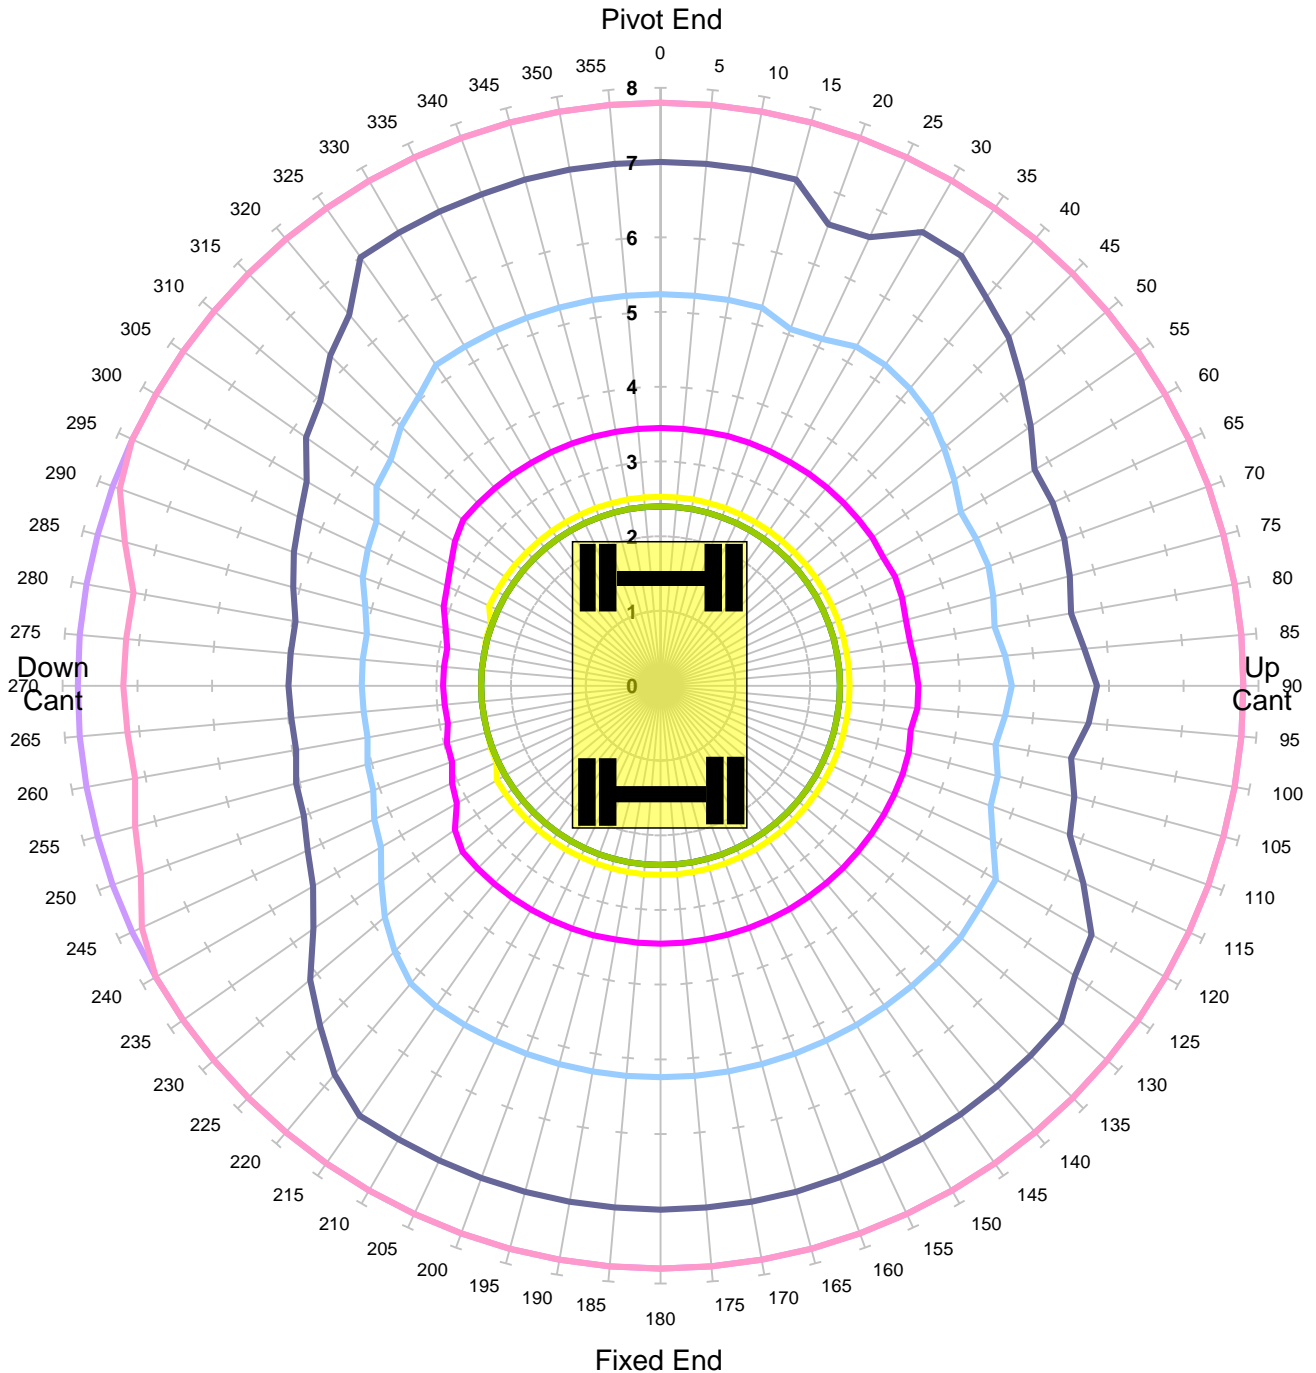

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, QUICK HITCH		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Gradient 1 in -25 Height 2m

Locked Rail Cant 150mm QH Tandem

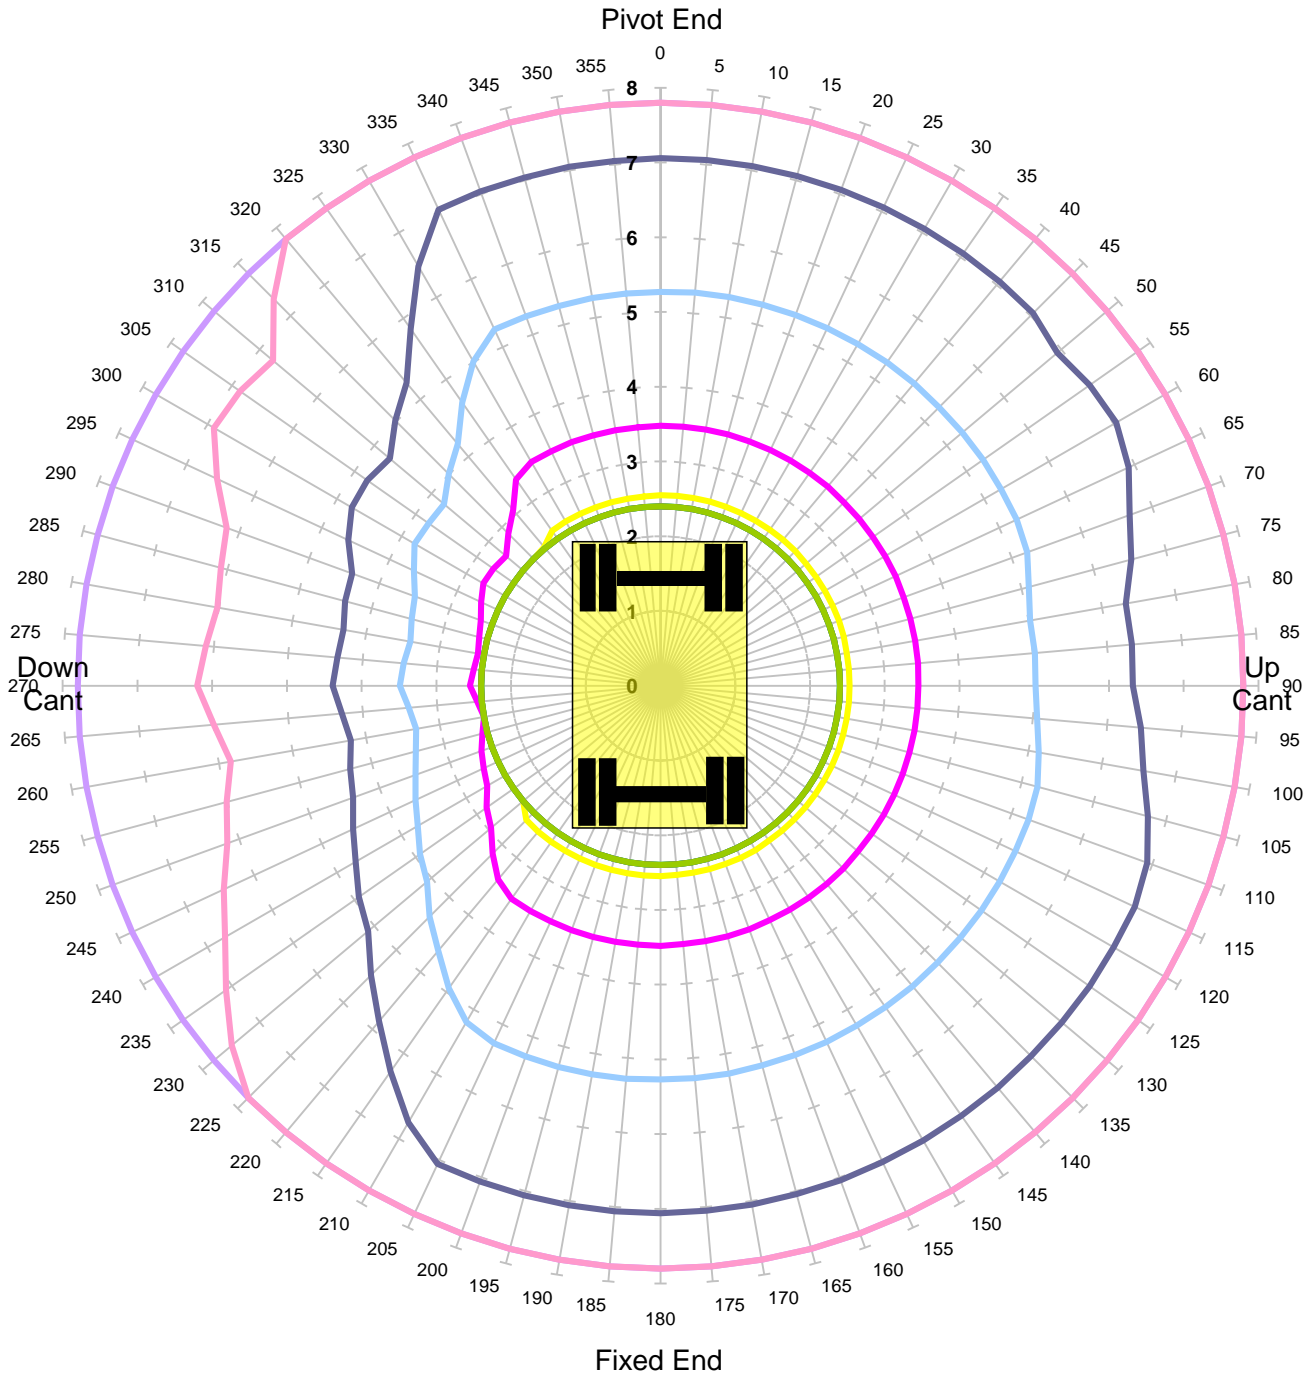

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	60.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, QUICK HITCH		


GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
Level Ground Height 2m

Unlocked Road QH Tandem

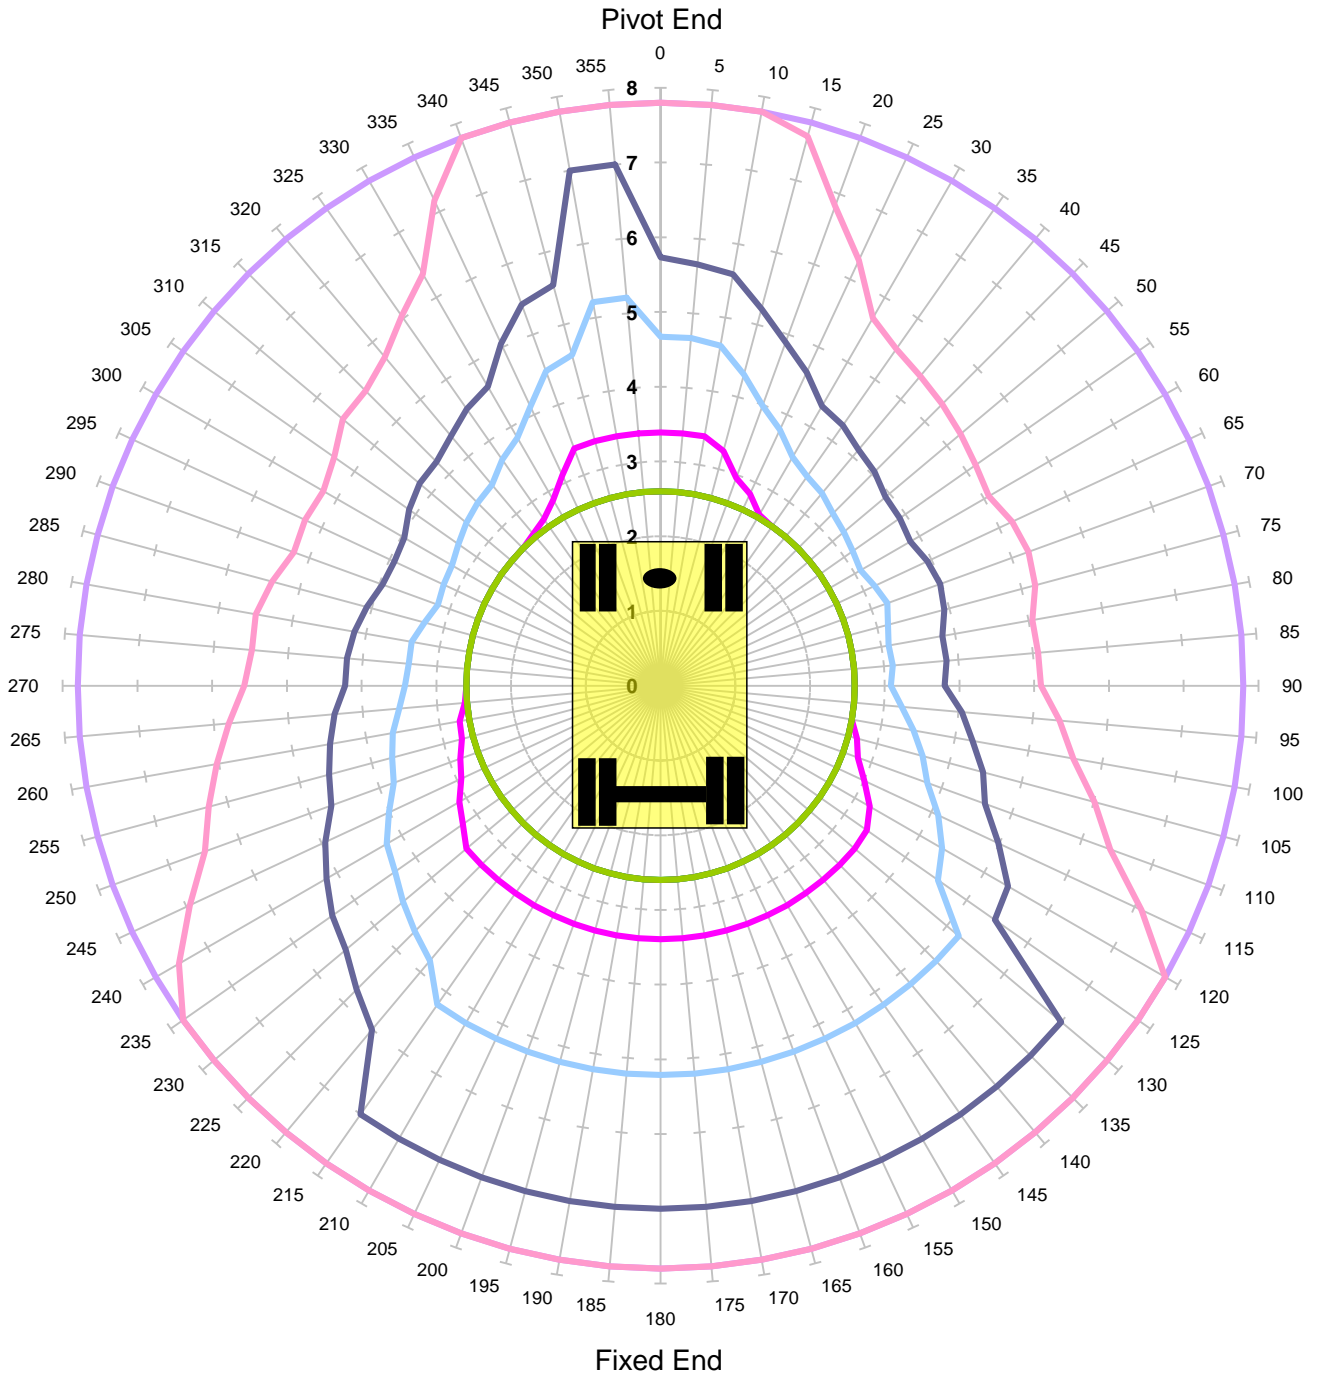

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16


MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	47.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, QUICK HITCH		

GOS TOOL AND ENGINEERING SERVICES LTD



DOOSAN DX170 ULTIMATE 270

Maximum Capacity Contours of Radius Plots (Metres) 2.1m Dipper
 Level Ground Height 2m
Locked Road QH Tandem

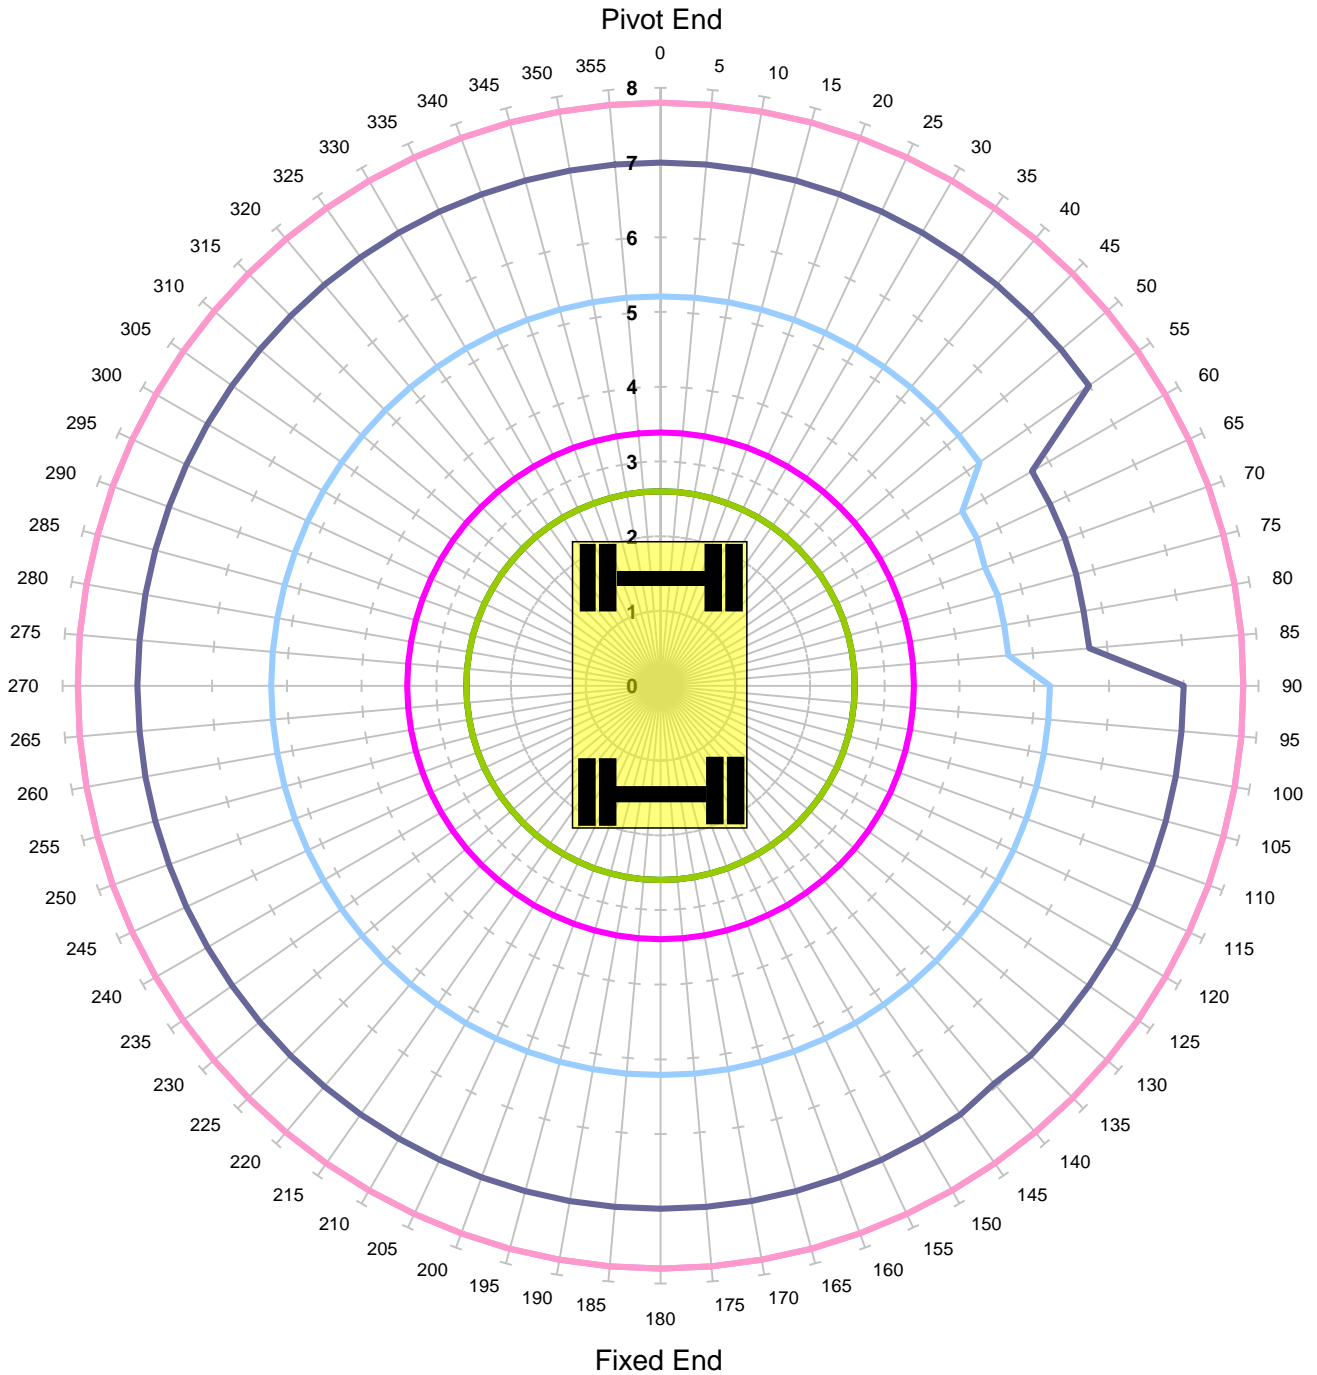

Units in Tonnes

- 1
- 2
- 3
- 4
- 6
- 8
- 10
- 12
- 14
- 16

MACHINE & MODEL:	DOOSAN DX170 ULTIMATE 270	REFERENCE:	G2456/RRC344/W177
SERIAL No:	5301	DATE OF CHART:	26-Jun-2014
EQUIPMENT:	BOOM 1.9M + ARTIC 3.65M + DIPPER 2.1M	SAFETY FACTOR:	47.0%
COMMENT:	TYPE APPROVED, TANDEM MODE, QUICK HITCH		